

J.B. Truck Service, LLC – Equipment for Rent

1231 Green Bay Rd, Sturgeon Bay, WI. 54235

www.jbtruckservice.com

(920)743-0964 shop • (847)400-6376 cell • jbtruckwi@gmail.com

Kubota U35-4R3A Excavator

Cab, heat, A/C, radio, rubber tracks, angle blade, hydraulic thumb, 24" bucket, zero tail swing.

Rates

Daily: \$300


Weekly: \$1,200

Delivery: Minimum \$60 (each way). Add \$2/mi over 25 miles (each way). Max. 75mi.



WORKING RANGE

Model			U35-4
A	Max. digging height	ft. in. (mm)	15'10.7"(4844)
B	Max. dumping height	ft. in. (mm)	11'0.7"(3370)
C	Max. digging depth	ft. in. (mm)	9'8.9"(2970)
D	Max. vertical digging depth	ft. in. (mm)	6'7.3"(2013)
E	Max. digging radius at ground	ft. in. (mm)	16'11.3"(5165)
F	Max. digging radius	ft. in. (mm)	17'3.6"(5272)
G	Min. turning radius	W/O swing ft. in. (mm)	7'4.6"(2250)
		W swing ft. in. (mm)	5'9.1"(1755)
H	Min. tail turning radius	ft. in. (mm)	2'11.5"(901)

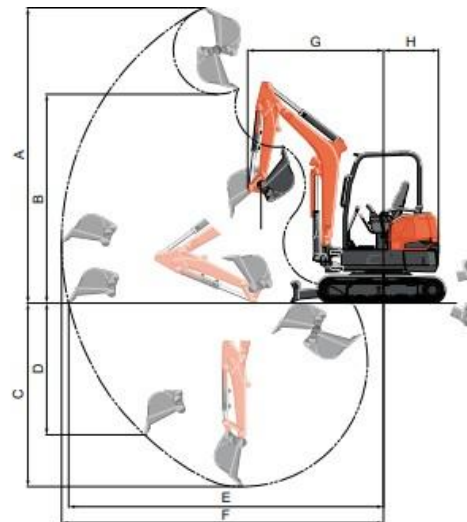

LIFTING CAPACITY

Canopy rubber

LIFT POINT HEIGHT (ft)	LIFTING CAPACITY OVER-FRONT BLADE DOWN unit=1000 lbs				LIFTING CAPACITY OVER-SIDE unit=1000 lbs		
	LIFT POINT RADIUS (ft)				LIFT POINT RADIUS (ft)		
	8	12	14		8	12	MAX
6	1.95	1.36	1.28		1.95	1.11	0.87
4	2.73	1.53	1.35		1.96	1.08	0.85
2	3.23	1.68	1.41		1.88	1.05	0.84
GL	0	3.33	1.77	1.43	1.84	1.02	0.82

Machine with ROPS canopy and rubber crawler, without bucket



U

U35-4

Kubota

SPECIFICATIONS

Specifications

Model					U35-4		U35-4 Angle Blade		
Type of ROPS / OPG (Top Guard Level I)*					Canopy / Cab				
Type of tracks					Rubber / Steel		Rubber / Steel		
Engine	Model				Kubota D1703M-DI-E4				
	Output (SAE J1995 gross)		HP (kW) / rpm		24.8 (18.5) / 2200				
	Output (SAE J1349 net)		HP (kW) / rpm		23.9 (17.8) / 2200				
	Displacement		cu. in. (cc)		100.5 (1647)				
Dimensions	Overall length		ft. in. (mm)		15'7" (4749)				
	Overall height		ft. in. (mm)		8'1.2 (2470)				
	Overall width		ft. in. (mm)		5'6.9" (1700)				
	Min. ground clearance		in. (mm)		11.34 (288)				
Hydraulic system	Pump capacity		GPM (ℓ/min)		10.5 (39.6) x 2 / 5.5 (20.9) x 1				
	Auxiliary hydraulic flow		AUX1 GPM (ℓ/min)		15.8 (60)				
	Max. breakout force		Bucket / Arm lbs. (kgf)		7924 (3594) / 4451 (2019)				
Drive system	Travel speed		Low / High mph (km/h)		1.9 (3.0) / 2.9 (4.6)				
	Max. traction force		Low speed lbs. (kgf)		6091 (2763)				
	Tumbler distance		ft. in. (mm)		5'6.5" (1688)				
	Crawler length		ft. in. (mm)		6'10" (2084)				
	Shoe width		Rubber in. (mm)		11.8 (300)				
	Ground contact pressure		Rubber Canopy / Cab psi (kgf/cm ²)		4.89 (0.34) / 5.08 (0.36)		5.10 (0.36) / 5.19 (0.36)		
			Steel Canopy / Cab psi (kgf/cm ²)		5.00 (0.35) / 5.19 (0.36)		5.21 (0.37) / 5.40 (0.38)		
Swing system	Unit swing speed		rpm		8.9				
	Boom swing angle		Left / Right degree		71 / 45				
Blade	Dimensions		Width ft. in. (mm)		5'6.9" (1700)				
			Height ft. in. (mm)		1'1.5" (343)		1'3.2" (385)		
	Max. lift above ground		in. (mm)		14.65 (372)		15.98 (406)		
	Max. drop below ground		in. (mm)		14.53 (369)		18.74 (476)		
	Angle		Left / Right degree		-		25 / 25		
Hydraulic oil (Reservoir / System)			gal (ℓ)		11.8 (44.6) / 16.1 (61)				
Fuel reservoir			gal (ℓ)		12.4 (46.9)				
Operating weight (Including operator's weight @ 175 lbs.)		Rubber Canopy / Cab		lbs. (kgf)		8129 (3687) / 8451 (3833)		8478 (3845) / 8800 (3991)	
		Steel Canopy / Cab		lbs. (kgf)		8325 (3776) / 8647 (3922)		8674 (3934) / 8996 (4080)	

* OPG (Top Guard Level I) in accordance with ISO10262 is equivalent in definition to FOPS (Falling Object Protective Structure).

The company reserves the right to change the above specifications without notice. This brochure is for descriptive purposes only. Please contact your local Kubota dealer for warranty information.

For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt for almost all applications.

DIMENSIONS

