


SOLAR MODULES

SunStarElite VIII

BIFACIAL MONO CRYSTALLINE HALF CUT MBB MODULE.

GStech144-6-530-550Wp-PEBI-GG-S-15.

HIGHEST PERFORMANCE THROUGH STATE-OF-THE-ART CELL TECHNOLOGY

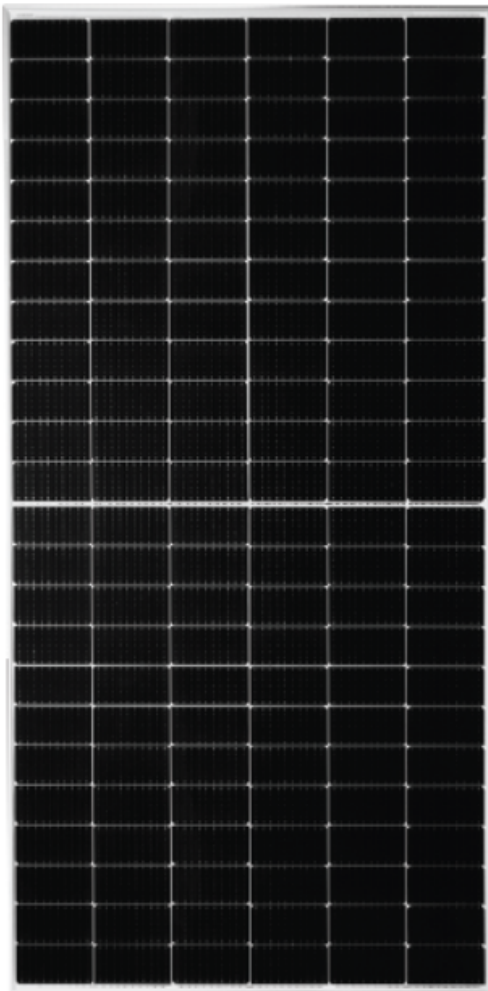

Key features:



5 BUS BAR

PERC SOLAR CELL

PERC panels have a higher energy density per square foot and perform well under high temperatures.



Less maintenance

HIGH EFFICIENCY

High module conversion efficiency up to 20.77 % through innovative manufacturing technology.



Low Light

LOW-LIGHT PERFORMANCE

Advanced glass and solar cell surface texturing allow for excellent performance in low-light environments.



2400 Pa | 5400 Pa

SEVERE WEATHER RESILIENCE

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



Resistant

DURABILITY AGAINST EXTREME ENVIRONMENTAL CONDITIONS

High salt mist and ammonia resistance certified by KIWA.



Performance

25-YEARS LINEAR PERFORMANCE WARRANTY

12-years limited warranty for materials and workmanship. GStech guarantees that each module shall deliver the following minimum output as shown in the datasheet for.

SunStarElite VIII

BIFACIAL MONO CRYSTALLINE HALF CUT MBB MODULE.

GStech144-6-530-550Wp-PEBI-GG-S-15.

HIGHEST PERFORMANCE THROUGH STATE-OF-THE-ART CELL TECHNOLOGY

PHYSICAL PARAMETERS

Solar Cell	Monocrystalline silicon 182 mm
Cell Configuration	144 cell (24 x 6)
Module Dimension	2285 x 1134 x 35 mm
Weight	31.6 kgs
Front Glass	2 mm, High Transmission, Low Iron, Semi- Tempered ARC Glass
Back Glass	2 mm, High Transmission, Low Iron, Semi- Tempered ARC Glass
Frame	Silver Anodized Aluminum Alloy Type 6063T5, Silver Color
J-Box	IP68, 1500VDC, 3 Bypass Diodes
Cables	4.0 sqmm (12AWG), 500 mm Length (Customer Demand)
Connector	IP68 MC4 Compatible

ELECTRICAL PARAMETERS (STC)


TYPE	GStech144-6-530M	GStech144-6-535M	GStech144-6-540M	GStech144-6-545M	GStech144-6-550M
Rated Maximum Power at STC (Wp)	530	535	540	545	550
Open Circuit Voltage Voc (V)	49.31	49.44	49.61	49.76	49.91
Maximum Power Voltage Vmpp (V)	41.32	41.46	41.65	41.81	41.97
Short Circuit Current Isc (A)	13.73	13.78	13.85	13.92	14.02
Maximum Power Current Impp (A)	12.83	12.90	12.97	13.04	13.1
Module Efficiency (%)	20.45	20.65	20.84	21.03	21.23

STC: Irradiance 1000W/m², Cell Temperature 25°C, air mass 1.5



BI-FACIAL OUTPUT - Backside Power Gain (Reference to 530M Front)

Rearside power Gain	5 %	15 %	25 %
Power Output (W)	557	610	663
Module Efficiency (%)	21.49	23.54	25.58

DIMENSION OF PV MODULE UNIT

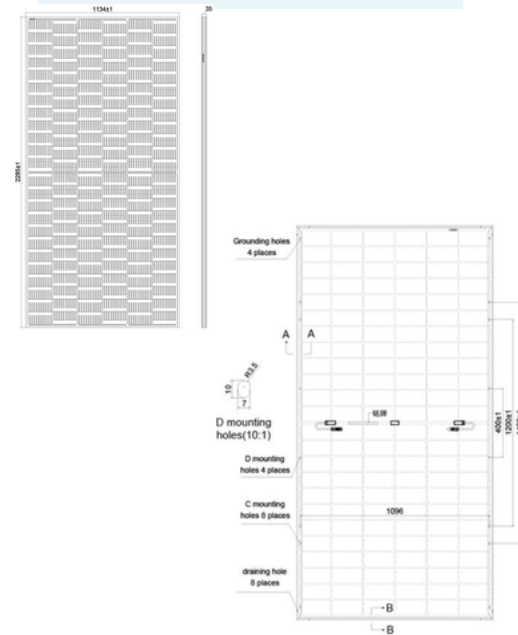

I-V CURVE

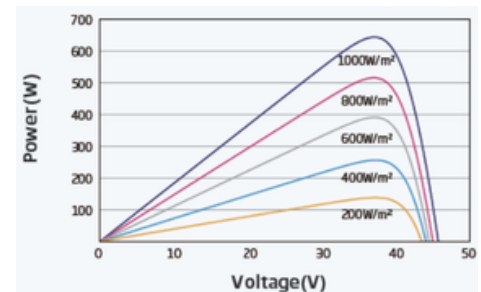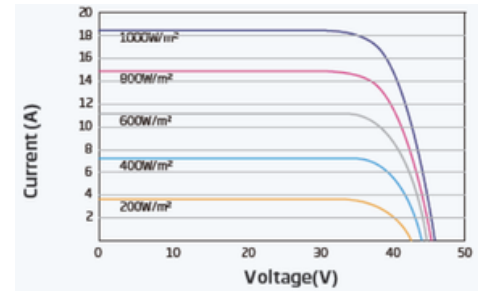

SunStarElite VIII

BIFACIAL MONO CRYSTALLINE HALF CUT MBB MODULE.

GStech144-6-530-550Wp-PEBI-GG-S-15.

HIGHEST PERFORMANCE THROUGH STATE-OF-THE-ART CELL TECHNOLOGY

TEMPERATURE COEFFICIENT AND PARAMETERS

Nominal Operating Cell Temperature (NOCT)	42°C ± 2°C
Temperature Coefficient of Pmax	-0.34%/°C
Temperature Coefficient of Voc	-0.26%/°C
Temperature Coefficient of Isc	0.050%/°C
Operating Temperature	-40°C~+85°C
Maximum System Voltage	1500VDC
Limiting Reverse Current	25A
Maximum Series Fuse Rating	25A
Power Tolerance (W)	0 to +3%
Application Class	Class A
Wind and Snow Front Load	Up to 5,400 Pa
Wind Back Load	2,400 Pa

PACKAGING CONFIGURATION

	40ft
Number of Modules per Container	620
Number of Modules per Pallet	31
Number of Pallets per Container	20
Box Dimension (L x W x H) in mm	2310 x 1130 x 1255
Box Gross Weight (Kg)	1042

