



# Index

## Drywall to Metal 4

- Scavenger head fine thread – drywall to light gauge metal attachment 4
- Bugle head fine thread – drywall to light gauge metal attachment 4
- Scavenger head drill point screws – drywall to heavy gauge metal attachment 4
- Bugle head drill point – drywall to heavy gauge metal attachment 4

## Drywall to Wood 5

- Scavenger head coarse thread – drywall to wood attachment 5
- Bugle head coarse thread screws – drywall to wood attachment 5
- Bugle head coarse thread screws – drywall to exterior wood attachment 5
- Bugle head laminator screws – drywall to drywall attachment 5

## Light Gauge Metal Framing 6

- Pan head Vector<sup>™</sup> point fine thread – metal to metal attachment 6
- Wafer head Vector<sup>™</sup> point fine thread – metal to metal attachment 6
- Bugle head Vector<sup>™</sup> point fine thread – metal to metal attachment 6
- Wafer head sharp point – metal to metal attachment 6
- Wafer head fine thread – lath to wood or metal attachment 6

## Metal Framing 7

- Wafer head drill point – lath to metal attachment 7
- Pan head drill point – metal to metal attachment 7
- Hex head drill point – metal framing to metal attachment 7-8

## Sheathing to Wood 8

- Flat wafer head sharp point – cement sheathing to wood attachment 8
- Flat wafer head drill point – high density sheathing to wood attachment 8
- Flat wafer head LOX winged drill point – high density sheathing to metal attachment 8

## Sheathing to Wood 8-9

- Flat wafer head winged drill point – high density sheathing to metal attachment 9

## Sheathing to Light Gauge Metal 9

- Flat head PLYLOK<sup>®</sup> – plywood to light gauge metal fastener 9

## Sheathing to Heavy Gauge Metal 9-10

- Wafer head PLYLOK<sup>®</sup> winged pilot point – plywood sheathing to metal attachment 9
- Wafer head PLYLOK<sup>®</sup> pilot drill point – plywood to metal attachment 9
- Wafer head PLYLOK<sup>®</sup> winged drill point – plywood to metal attachment 9
- Flat head PLYLOK<sup>®</sup> drill point – plywood to steel joist attachment 10
- Flat head PLYLOK<sup>®</sup> winged drill point – plywood to metal attachment 10

## Wood to Wood or Metal 10

- Flat head PLYLOK<sup>®</sup> winged drill point – plywood to steel joist attachment 10
- Trim head type 17 point – wood to light gauge metal or wood 10
- Trim head drill point – wood to metal or wood attachment 10
- Flat head woody – general interior wood construction 10
- Flat head woody – exterior deck and fence wood construction 10

## Interior Wood to Wood 11

- Pan head cabinet screws – cabinets and general wood construction 11

## Specialty Stainless Steel Screws 11

- Flat head coarse thread – deck and fence attachment 11
- Bugle head coarse thread – general wood to wood attachment 11
- Flat head coarse thread – deck and fence attachment 11
- Trim head fine thread Streaker<sup>®</sup> – trim to wood or metal attachment 11

## Wood to Wood Framing 12

- Hex head Lag-Master<sup>™</sup> – general wood to wood attachment 12
- Flat head star Tie-Master<sup>™</sup> shank – timber attachment 12

## Drywall Nails 13

### SuperDrive<sup>®</sup> 14-17

- SuperDrive tools 14-15
- Collated application chart for SuperDrive 16-17

## Acoustical Products 18

- Eye-lag screws – hanger wire attachment 18
- Eye-lag adapter – ceiling attachment 18
- Eye-lag poles – ceiling attachment 18

## CB Clips 18

## Bits and Bit Holders 19

## Abrasives 20

## Grabber Rocker<sup>®</sup> Screw Drivers 20

## Ramset<sup>®</sup> Powder Fastening Systems 21-22

## Nitroset<sup>™</sup> Fastening System 23

## Ramset<sup>®</sup> Gas Fastening Systems 24

## Aerosmith<sup>®</sup> Air Fastening Systems 25

## Max<sup>®</sup> Air Compressor 26

## Access Doors 26

## Red Head<sup>®</sup> Mechanical Anchors 27

## Red Head<sup>®</sup> Mechanical & Epoxy Anchors 28

## Adhesives, Fire Caulk, Scaffold 29

## Precision Lasers 30

## Coatings and Finishes 31

# About Grabber

GRABBER is a leading distributor of quality products built for construction professionals. For contractors quality is everything. Products must be 100% reliable and durable to meet the demands of an increasingly fast-paced and productivity-minded profession.

The construction industry rewards innovations that achieve real gains in efficiency, performance, and job quality. All GRABBER products must meet this high standard of excellence. Grabber engineers its fastener products to be superior to all other products in their class.

Grabber's core line of products include fasteners for a variety of wood, metal, drywall, sheathing, and acoustical applications. GRABBER fasteners are regarded as the best in the industry, punctuated by the fact that its competitors have had to duplicate Grabber fastener designs. GRABBER also distributes many other product lines for the commercial and residential construction industries as well, including proprietary construction equipment, drywall tools and materials, power drives, adhesives, and accessories.



# Grabber Fastener Applications

## Grabber has you covered

Grabber's extensive line of professional grade fasteners cover just about every fastener need in residential and commercial construction applications.

- Interior Grade Screws
- Exterior Grade Screws
- Light Gauge Metal Screws
- Heavy Gauge Metal Screws
- Stainless Steel Screws
- Cement Board Screws





**Drywall to Metal**

**Scavenger® Head Streaker®**

**LIGHT GAUGE METAL Drywall**



Attaches gypsum board to 25-20 ga. steel. Unique Scavenger® head helps reduce paper burrs.

- Scavenger® head
- Fine thread
- No. 2 Phillips
- Gray phosphate

**Unique Scavenger® head**

Grabber's unique Scavenger® head screws drive cleanly into drywall helping to reduce or eliminate paper burrs. As typical drywall screws are driven they tend to leave behind paper burrs. These paper burrs require more mud to cover and more sanding and finishing time, resulting in lost time and higher labor costs.

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
1685	6 x 1-in	28-lb	10M	SCAVENGER HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
2685	6 x 1-1/8-in	32-lb	10M	SCAVENGER HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
3685	6 x 1-1/4-in	30-lb	8M	SCAVENGER HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
4685	6 x 1-5/8-in	22-lb	5M	SCAVENGER HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE

**TYPICAL**



**SCAVENGER®**



**Bugle Head Streaker®**

**LIGHT GAUGE METAL Drywall**



Attaches gypsum board to wood or 25-20 ga. steel. Standard bugle head.

- Bugle head
- Fine thread
- No. 2 Phillips
- Gray phosphate



PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
168	6 x 1-in	29-lb	10M	BUGLE HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
268	6 x 1-1/8-in	32-lb	10M	BUGLE HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
368	6 x 1-1/4-in	30-lb	8M	BUGLE HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
468	6 x 1-5/8-in	22-lb	5M	BUGLE HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
768	6 x 2-in	22-lb	3.5M	BUGLE HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
868	7 x 2-1/4-in	20-lb	3M	BUGLE HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
968	8 x 2-1/2-in	20-lb	2.5M	BUGLE HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
1168	8 x 3-in	22-lb	2M	BUGLE HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
1268	10 x 3-1/2-in	17-lb	1M	BUGLE HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
1368	10 x 4-in	21-lb	1M	BUGLE HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
1468	10 x 4-1/2-in	23-lb	1M	BUGLE HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
1568	10 x 5-in	24-lb	1M	BUGLE HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE
1768	10 X 6-in 28-lb	1M		BUGLE HEAD, #2PHIL, FINE THREAD, GRAY PHOSPHATE

**LIGHT GAUGE METAL Drywall**



Attaches gypsum board to wood or 25-20 ga. steel. Standard bugle head.

- Bugle head
- Fine thread
- No. 2 Phillips
- Clear Zinc



PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
168Z	6 x 1-in	29-lb	10M	BUGLE HEAD, #2PHIL, FINE THREAD, CLEAR ZINC
268Z	6 x 1-1/8-in	32-lb	10M	BUGLE HEAD, #2PHIL, FINE THREAD, CLEAR ZINC
368Z	6 x 1-1/4-in	30-lb	8M	BUGLE HEAD, #2PHIL, FINE THREAD, CLEAR ZINC
468Z	6 x 1-5/8-in	22-lb	5M	BUGLE HEAD, #2PHIL, FINE THREAD, CLEAR ZINC
768Z	6 x 2-in	22-lb	3.5M	BUGLE HEAD, #2PHIL, FINE THREAD, CLEAR ZINC
968Z	8 x 2-1/2-in	20-lb	2.5M	BUGLE HEAD, #2PHIL, FINE THREAD, CLEAR ZINC
1168Z	8 x 3-in	22-lb	2M	BUGLE HEAD, #2PHIL, FINE THREAD, CLEAR ZINC

**Scavenger® Head Driller**

**HEAVY GAUGE METAL Drywall**



Attaches gypsum, insulation board, wood, etc. to metal studs 20-14 ga. Unique Scavenger® head helps reduce paper burrs.


- Scavenger® head
- Drill point
- No. 2 Phillips
- Gray phosphate

**Unique Scavenger® head**



PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
135	6 x 1-in	33-lb	10M	SCAVENGER HEAD, #2PHIL, DRILL POINT, PHOSPHATE
135S	6 x 1-1/8-in	37-lb	10M	SCAVENGER HEAD, #2PHIL, DRILL POINT, PHOSPHATE
145	6 x 1-1/4-in	33-lb	8M	SCAVENGER HEAD, #2PHIL, DRILL POINT, PHOSPHATE
155	6 x 1-5/8-in	22-lb	5M	SCAVENGER HEAD, #2PHIL, DRILL POINT, PHOSPHATE
165	6 x 1-7/8-in	26-lb	4M	SCAVENGER HEAD, #2PHIL, DRILL POINT, PHOSPHATE
305S	8 x 2-3/8-in	28-lb	3M	SCAVENGER HEAD, #2PHIL, DRILL POINT, PHOSPHATE
30MS	8 x 2-5/8-in	20-lb	2M	SCAVENGER HEAD, #2PHIL, DRILL POINT, PHOSPHATE
30LS	8 x 3-in	22-lb	2M	SCAVENGER HEAD, #2PHIL, DRILL POINT, PHOSPHATE

**HEAVY GAUGE METAL Drywall**



Attaches gypsum, insulation board, wood, etc. to metal studs 20-14 ga. Unique Scavenger® head helps reduce paper burrs.

- Scavenger® head
- Drill point
- No. 2 Phillips
- Clear zinc



PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
135Z	6 x 1-in	33-lb	10M	SCAVENGER HEAD, #2PHIL, DRILL POINT, CLEAR ZINC
135SZ	6 x 1-1/8-in	37-lb	10M	SCAVENGER HEAD, #2PHIL, DRILL POINT, CLEAR ZINC
145Z	6 x 1-1/4-in	33-lb	8M	SCAVENGER HEAD, #2PHIL, DRILL POINT, CLEAR ZINC
155Z	6 x 1-5/8-in	22-lb	5M	SCAVENGER HEAD, #2PHIL, DRILL POINT, CLEAR ZINC
165Z	6 x 1-7/8-in	26-lb	4M	SCAVENGER HEAD, #2PHIL, DRILL POINT, CLEAR ZINC
305SZ	8 x 2-3/8-in	28-lb	3M	SCAVENGER HEAD, #2PHIL, DRILL POINT, CLEAR ZINC
30MSZ	8 x 2-5/8-in	20-lb	2M	SCAVENGER HEAD, #2PHIL, DRILL POINT, CLEAR ZINC
30LSZ	8 x 3-in	22-lb	2M	SCAVENGER HEAD, #2PHIL, DRILL POINT, CLEAR ZINC

**Bugle Head Driller**

**HEAVY GAUGE METAL Sheathing**



Attaches sheathing, insulation board, wood, etc. to metal studs 20-14 ga. Standard bugle head.

- Bugle head
- Drill point
- No. 2 Phillips
- GrabberGard® gray



PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
14RG	6 x 1-1/4-in	33-lb	8M	Bugle HEAD, #2PHIL, DRILL POINT, GRABBERGARD
15RG	6 x 1-5/8-in	22-lb	5M	Bugle HEAD, #2PHIL, DRILL POINT, GRABBERGARD
16RG	6 x 1-7/8-in	26-lb	4M	Bugle HEAD, #2PHIL, DRILL POINT, GRABBERGARD
30SRG	8 x 2-3/8-in	28-lb	3M	Bugle HEAD, #2PHIL, DRILL POINT, GRABBERGARD
30MRG	8 x 2-5/8-in	20-lb	2M	Bugle HEAD, #2PHIL, DRILL POINT, GRABBERGARD
30LRG	8 x 3-in	22-lb	2M	Bugle HEAD, #2PHIL, DRILL POINT, GRABBERGARD



## Drywall to Wood

### Scavenger® Head Grabber®



#### Unique Scavenger® head

▶ Reduces paper burrs

### INTERIOR WOOD Drywall

Attaches gypsum board to wood. Unique Scavenger® head helps reduce paper burrs.

- Scavenger® head
- Coarse thread
- No. 2 Phillips
- Gray phosphate

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
108	6 x 1-in	28-lb	10M	SCAVENGER HEAD, #2PHIL, COURSE THREAD, GRAY PHOSPHATE
208	6 x 1-1/8-in	32-lb	10M	SCAVENGER HEAD, #2PHIL, COURSE THREAD, GRAY PHOSPHATE
308	6 x 1-1/4-in	30-lb	8M	SCAVENGER HEAD, #2PHIL, COURSE THREAD, GRAY PHOSPHATE
408	6 x 1-5/8-in	22-lb	5M	SCAVENGER HEAD, #2PHIL, COURSE THREAD, GRAY PHOSPHATE
508	7 x 2-in	21-lb	3.5M	SCAVENGER HEAD, #2PHIL, COURSE THREAD, GRAY PHOSPHATE

### Bugle Head GRABBER®



### INTERIOR WOOD Drywall

Attaches gypsum board and wood to wood. Extra sharp point and threads make driving easier and provide better holding power.

- Bugle head
- Coarse thread
- No. 2 Phillips
- Gray phosphate

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
100	6 x 1-in	29-lb	10M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRAY PHOSPHATE
200	6 x 1-1/8-in	32-lb	10M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRAY PHOSPHATE
300	6 x 1-1/4-in	33-lb	8M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRAY PHOSPHATE
400	6 x 1-5/8-in	22-lb	5M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRAY PHOSPHATE
500	7 x 2-in	21-lb	3.5M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRAY PHOSPHATE
600	7 x 2-1/4-in	20-lb	3M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRAY PHOSPHATE
900	8 x 2-1/2-in	25-lb	2.5M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRAY PHOSPHATE
1100	8 x 3-in	22-lb	2M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRAY PHOSPHATE
1200	10 x 3-1/2-in	17-lb	1M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRAY PHOSPHATE
1300	10 x 4-in	20-lb	1M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRAY PHOSPHATE



### INTERIOR WOOD General

Ideal for general purpose interior soft wood to wood applications. Extra sharp point and threads make driving easier and provide better holding power.

- Bugle head
- Coarse thread
- No. 2 Phillips
- Yellow zinc

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
100YZ	6 x 1-in	30-lb	10M	BUGLE HEAD, #2PHIL, COARSE THREAD, YELLOW ZINC
300YZ	6 x 1-1/4-in	33-lb	8M	BUGLE HEAD, #2PHIL, COARSE THREAD, YELLOW ZINC
400YZ	6 x 1-5/8-in	22-lb	5M	BUGLE HEAD, #2PHIL, COARSE THREAD, YELLOW ZINC
500YZ	7 x 2-in	21-lb	3.5M	BUGLE HEAD, #2PHIL, COARSE THREAD, YELLOW ZINC
600YZ	7 x 2-1/4-in	20-lb	3M	BUGLE HEAD, #2PHIL, COARSE THREAD, YELLOW ZINC
900YZ	8 x 2-1/2-in	25-lb	2.5M	BUGLE HEAD, #2PHIL, COARSE THREAD, YELLOW ZINC
1100YZ	8 x 3-in	22-lb	2M	BUGLE HEAD, #2PHIL, COARSE THREAD, YELLOW ZINC
1200YZ	10 x 3-1/2-in	30-lb	1.5M	BUGLE HEAD, #2PHIL, COARSE THREAD, YELLOW ZINC
1300YZ	10 x 4-in	30-lb	1M	BUGLE HEAD, #2PHIL, COARSE THREAD, YELLOW ZINC



### EXTERIOR WOOD General

Attaches sheathing, insulation board, wood to wood. Standard bugle head.

Note: Staining may occur when using freshly cut lumber.

- Bugle head
- Coarse thread
- No. 2 Phillips
- GrabberGuard® gray

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
100RG	6 x 1-in	30-lb	10M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRABBERGARD
200RG	6 x 1-1/8-in	32-lb	10M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRABBERGARD
300RG	6 x 1-1/4-in	33-lb	8M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRABBERGARD
400RG	6 x 1-5/8-in	22-lb	5M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRABBERGARD
500RG	7 x 2-in	21-lb	3.5M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRABBERGARD
600RG	7 x 2-1/4-in	20-lb	3M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRABBERGARD
900RG	8 x 2-1/2-in	25-lb	2.5M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRABBERGARD
1100RG	8 x 3-in	22-lb	2M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRABBERGARD
1200RG	10 x 3-1/2-in	17-lb	1M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRABBERGARD
1300RG	10 x 4-in	20-lb	1M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRABBERGARD

## Drywall to Drywall

### Bugle Head Drywall Laminator




### LAMINATING Drywall

Laminates gypsum board. Heavy gauge laminator screws are also ideal for wood to wood connection.

- Bugle head
- Coarse thread
- No. 2 Phillips
- Gray phosphate

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
12	10 x 1-1/2-in	37-lb	5M	BUGLE HEAD, #2PHIL, COARSE THREAD, GRAY PHOSPHATE

Use with Grabber drywall adhesive, item number: **GDWA**



### LAMINATING Drywall

Laminates gypsum board. Heavy gauge laminator screws are also ideal for wood to wood connection.

- Bugle head
- Coarse thread
- No. 2 Phillips
- Clear zinc

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
12Z	10 x 1-1/2-in	37-lb	5M	BUGLE HEAD, #2PHIL, COARSE THREAD, CLEAR ZINC

Use with Grabber drywall adhesive, item number: **GDWA**



**Light Gauge Metal Framing**

**Pan Head Vector™ Point**



- ▶ Faster seating
- ▶ Sharper/steeper angle point
- ▶ Faster penetration
- ▶ Better holding power

**LIGHT GAUGE METAL Framing**

Pan head Vector™ point fasteners are designed for exceptionally fast driving into 25-20 ga. steel. Unique grip-tight, high torque pan-head design.

- Pan head
- Fine thread
- Vector point
- No. 2 Phillips
- Gray phosphate

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
23V	7 x 7/16-in	35-lb	15M	PAN HEAD, #2PHIL, VECTOR POINT, FINE THREAD, PHOSPHATE



**Wafer Head Vector™ Point**




- ▶ Faster seating
- ▶ Sharper/steeper angle point
- ▶ Faster penetration
- ▶ Better holding power

**LIGHT GAUGE METAL Framing**

Wafer head Vector™ point fasteners are designed for exceptionally fast driving into 25-20 ga. steel. Attaches lath to light gauge metal.

- Wafer head
- Fine thread
- Vector point
- No. 2 Phillips
- Clear zinc

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
31ZV	7 x 9/16-in	35-lb	10M	WAFER HEAD, #2PHIL, VECTOR POINT, FINE THREAD, CLEAR ZINC

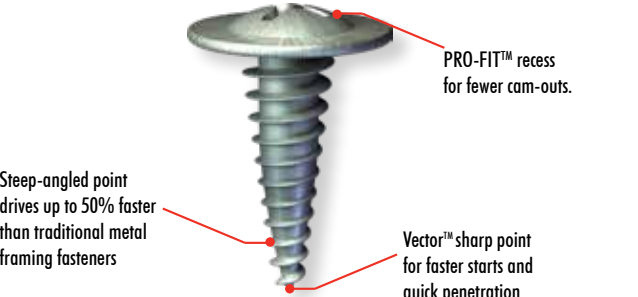

**Scavenger® Head Vector™ Point**



**LIGHT GAUGE METAL Drywall**

Attaches gypsum board to wood or 25-20 ga. steel. Unique Scavenger® head helps reduce paper burrs.

- Scavenger® head
- Fine thread
- No. 2 Phillips
- Gray phosphate

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
368SV	6 x 1-1/4-in	30-lb	8M	SCAVENGER HEAD, #2PHIL, VECTOR POINT, FINE THREAD, PHOSPHATE

\* Also available in collation

Grabber's new Vector™ screw significantly reduces drive time and increases productivity with its much sharper and steeper-angled point compared to traditional framing fasteners. Independent testing has demonstrated that Vector™ point screws drive up to eight times faster than IFI SAE J78 fastener penetration standards and 50% faster than competing fasteners. In a drive comparison with standard framing fasteners, the Vector™ performed considerably better across the board in multiple drive test comparisons.

**Wafer Head Streaker®**



**LIGHT GAUGE METAL Framing**

Attaches metal lath to wood or to 25-20 ga. steel studs and framing.

- Wafer head
- Fine thread
- No. 2 Phillips
- Clear zinc

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
31Z	8 x 9/16-in	37-lb	10M	WAFER HEAD, #2PHIL, FINE THREAD, CLEAR ZINC
32Z	8 x 1-in	26-lb	5M	WAFER HEAD, #2PHIL, FINE THREAD, CLEAR ZINC
33Z	8 x 1-1/4-in	31-lb	5M	WAFER HEAD, #2PHIL, FINE THREAD, CLEAR ZINC
3138Z	8 x 1-1/2-in	21-lb	3M	WAFER HEAD, #2PHIL, FINE THREAD, CLEAR ZINC
3151Z	8 x 2-in	22-lb	2.5M	WAFER HEAD, #2PHIL, FINE THREAD, CLEAR ZINC
3176Z	8 x 3-in	12-lb	1M	WAFER HEAD, #2PHIL, FINE THREAD, CLEAR ZINC

**LIGHT GAUGE METAL Framing**

Attaches metal lath to wood or to 25-20 ga. steel studs and framing.

- Wafer head
- Fine thread
- No. 2 Phillips
- GrabberGard® gray

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
31RG	8 x 9/16-in	37-lb	10M	WAFER HEAD, #2PHIL, FINE THREAD, GRABBERGARD
32RG	8 x 1-in	26-lb	5M	WAFER HEAD, #2PHIL, FINE THREAD, GRABBERGARD
33RG	8 x 1-1/4-in	31-lb	5M	WAFER HEAD, #2PHIL, FINE THREAD, GRABBERGARD





## Metal Framing

### Wafer Head Driller



**Hydrogen Embrittlement Protected**



Grabber's SuperPoint™ premium lathing and framing fasteners feature sharper threads and drill points and are designed to meet the most demanding metal framing applications.

#### HEAVY GAUGE METAL Framing

Attaches metal lath to 20-14 ga. steel studs and framing.

- Wafer head
- Drill point
- No. 2 Phillips
- Clear zinc

Note:  
Super Point Type 3 Available in bulk.  
Part numbers: 234Z, 235Z, 236Z, 237Z, and 239Z

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
34Z	8 x 1/2-in	27-lb	10M	WAFER HEAD, #2PHIL, DRILL POINT, CLEAR ZINC
35Z	8 x 1-in	27-lb	5M	WAFER HEAD, #2PHIL, DRILL POINT, CLEAR ZINC
36Z	8 x 1-1/4-in	32-lb	5M	WAFER HEAD, #2PHIL, DRILL POINT, CLEAR ZINC
37Z	8 x 1 5/8-in	32-lb	4M	WAFER HEAD, #2PHIL, DRILL POINT, CLEAR ZINC
39Z	8 x 3-in	31-lb	1M	WAFER HEAD, #2PHIL, DRILL POINT, CLEAR ZINC
234Z	8 x 1/2-in	27-lb	10M	WAFER HEAD, #2PHIL, SUPER POINT, CLEAR ZINC
235Z	8 x 1-in	27-lb	5M	WAFER HEAD, #2PHIL, SUPER POINT, CLEAR ZINC
236Z	8 x 1-1/4-in	32-lb	5M	WAFER HEAD, #2PHIL, SUPER POINT, CLEAR ZINC
238Z	8 x 2-1/2-in	31-lb	2.5M	WAFER HEAD, #2PHIL, SUPER POINT, CLEAR ZINC
234Z10CW	10 x 3/4-in	34-lb	5M	WAFER HEAD, #2PHIL, SUPER POINT, CLEAR ZINC
236Z10CW	10 x 1-1/4-in	34-lb	5M	WAFER HEAD, #2PHIL, SUPER POINT, CLEAR ZINC
234Z12CW	12 x 3/4-in	34-lb	5M	WAFER HEAD, #2PHIL, SUPER POINT, CLEAR ZINC

### Pan Head Driller



#### HEAVY GAUGE METAL Framing

Framing screw for 20-14 ga.

- Pan head
- Drill point
- No. 2 Phillips
- Clear zinc

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
19Z	6 x 7/16-in	38-lb	15M	PAN HEAD, #2PHIL, DRILL POINT, CLEAR ZINC
20Z	8 x 1/2-in	33-lb	10M	PAN HEAD, #2PHIL, DRILL POINT, CLEAR ZINC
10058P3	10 x 5/8-in	38-lb	7.5M	PAN HEAD, #2PHIL, DRILL POINT, CLEAR ZINC

#### HEAVY GAUGE METAL Framing

Framing screw for 20-14 ga.

- Pan head
- Drill point
- No. 2 Phillips
- Gray phosphat

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
19	6 x 7/16-in	38-lb	15M	PAN HEAD, #2PHIL, DRILL POINT, BLACK PHOSPHATE

## Heavy Gauge Metal Framing - Self Drilling Screws

### Flat Pan Head Driller



**LOX**  
DRIVE SYSTEM

#### HEAVY GAUGE METAL Framing

Flat pan head drill point fasteners designed for attaching 20-14 ga. steel. LOX recess for better driving performance. Unique grip-tight, high torque pan head design.

- Pan head
- Drill point
- No. 2 LOX®
- Yellow zinc

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
FP101875LYZ	10-18 x 3/4-in	42-lb	8M	FLAT PAN HEAD, LOX 2, YELLOW ZINC
FP102275LYZ	10-22 x 3/4-in	44-lb	8M	FLAT PAN HEAD, LOX 2, YELLOW ZINC

### Flat Pan Head Driller



**LOX**  
DRIVE SYSTEM

#### HEAVY GAUGE METAL Framing

Flat pan head drill point fasteners designed for attaching 20-14 ga. steel. LOX recess for better driving performance. Unique grip-tight, high torque pan head design.

- Pan head
- Drill point
- No. 2 LOX®
- Clear zinc

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
FP121878JBWZ	12-18 x 7/8-in	44-lb	6M	FLAT PAN HEAD, LOX 2, CLEAR ZINC
FP1218125JBWZ	12-18 x 1-1/4-in	44-lb	3.5M	FLAT PAN HEAD, LOX 2, CLEAR ZINC

### Hex Head Streaker®



#### LIGHT GAUGE METAL Framing

High-torque washer head for fast framing and sheet metal work in 25-20 ga. Use 1/4-in nut setter.

- Hex head
- Fine thread
- Clear zinc

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
25Z	8 x 9/16-in	33-lb	10M	HEX HEAD, FINE THREAD, CLEAR ZINC

### Hex Head Driller



**G** GrabberGard®

#### HEAVY GAUGE METAL Framing

Attaches fixtures, backup plates, door frames and lathers channel to structural studs, metal checks, etc. in 20-14 ga.

- Hex head
- Drill point
- GrabberGard

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
10075H3RG	10 x 3/4-in	34-lb	5M	12 GAUGE HEX HEAD DRILLER, GRABBERGARD
12075H3RG	12 x 1-1/2-in	35-lb	3.5M	12 GAUGE HEX HEAD DRILLER, GRABBERGARD
1224150H4RG	12-24 x 1-1/2-in	33-lb	2.5M	12 GAUGE HEX HEAD DRILLER, GRABBERGARD
1224200H4RG	12-24 x 2-in	36-lb	2M	12 GAUGE HEX HEAD DRILLER, GRABBERGARD

**Hex Head Driller**



**HEAVY GAUGE METAL** General

Attaches fixtures, backup plates, door frames and lathers channel to structural studs in 20-14 ga.

- Hex head
- Drill point
- Clear zinc

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
08050H3	8 x 1/2-in	37-lb	10M	8 GAUGE HEX HEAD DRILLER, CLEAR ZINC
08058H3	8 x 5/8-in	37-lb	10M	8 GAUGE HEX HEAD DRILLER, CLEAR ZINC
08075H3	8 x 3/4-in	42-lb	10M	8 GAUGE HEX HEAD DRILLER, CLEAR ZINC
08100H3	8 x 1-in	38-lb	7.5M	8 GAUGE HEX HEAD DRILLER, CLEAR ZINC
08125H3	8 x 1-1/4-in	35-lb	5M	8 GAUGE HEX HEAD DRILLER, CLEAR ZINC
08200H3	8 x 2-in	33-lb	3M	8 GAUGE HEX HEAD DRILLER, CLEAR ZINC
10050H3	10 x 1/2-in	34-lb	5M	10 GAUGE HEX HEAD DRILLER, CLEAR ZINC
10058H3	10 x 5/8-in	41-lb	7.5M	10 GAUGE HEX HEAD DRILLER, CLEAR ZINC
10075H3	10 x 3/4-in	30-lb	5M	10 GAUGE HEX HEAD DRILLER, CLEAR ZINC
10100H3	10 x 1-in	37-lb	5M	10 GAUGE HEX HEAD DRILLER, CLEAR ZINC
10125H3	10 x 1-1/4-in	33-lb	5M	10 GAUGE HEX HEAD DRILLER, CLEAR ZINC
10150H3	10 x 1-1/2-in	35-lb	3.5M	10 GAUGE HEX HEAD DRILLER, CLEAR ZINC
10200H3	10 x 2-in	31-lb	3M	10 GAUGE HEX HEAD DRILLER, CLEAR ZINC
12075H3	12 x 3/4-in	40-lb	5M	12 GAUGE HEX HEAD DRILLER, CLEAR ZINC
12100H3	12 x 1-in	40-lb	3.5M	12 GAUGE HEX HEAD DRILLER, CLEAR ZINC
12125H3	12 x 1-1/4-in	34-lb	3.5M	12 GAUGE HEX HEAD DRILLER, CLEAR ZINC
12150H3	12 x 1-1/2-in	35-lb	3.5M	12 GAUGE HEX HEAD DRILLER, CLEAR ZINC
12200H3	12 x 2-in	32-lb	3.5M	12 GAUGE HEX HEAD DRILLER, CLEAR ZINC
12250H3	12 x 2-1/2-in	30-lb	1.5M	12 GAUGE HEX HEAD DRILLER, CLEAR ZINC
12300H3	12 x 3-in	22-lb	1M	12 GAUGE HEX HEAD DRILLER, CLEAR ZINC
12350H3	12 x 3-1/2-in	21-lb	1M	12 GAUGE HEX HEAD DRILLER, CLEAR ZINC
14075H3	14 x 3/4-in	61-lb	5M	14 GAUGE HEX HEAD DRILLER, CLEAR ZINC
14100H3	14 x 1-in	52-lb	3.5M	14 GAUGE HEX HEAD DRILLER, CLEAR ZINC
14125H3	14 x 1-1/4-in	35-lb	2M	14 GAUGE HEX HEAD DRILLER, CLEAR ZINC
14150H3	14 x 1-1/2-in	33-lb	2M	14 GAUGE HEX HEAD DRILLER, CLEAR ZINC
14200H3	14 x 2-in	34-lb	1.5M	14 GAUGE HEX HEAD DRILLER, CLEAR ZINC
14250H3	14 x 2-1/2-in	33-lb	2M	14 GAUGE HEX HEAD DRILLER, CLEAR ZINC
14300H3	14 x 3-in	22-lb	2M	14 GAUGE HEX HEAD DRILLER, CLEAR ZINC
14400H4	14 x 4-in	21-lb	5M	14 GAUGE HEX HEAD DRILLER, CLEAR ZINC
122478H4	12-24 x 7/8-in	50-lb	3.5M	12-24 GAUGE HEX HEAD DRILLER, CLEAR ZINC
1224125H4	12-24 x 1-1/4-in	50-lb	3M	12-24 GAUGE HEX HEAD DRILLER, CLEAR ZINC

**HYDROGEN EMBRITTELEMENT**



Grabber's 10, 12 & 14 gauge zinc-plated drill point fasteners are manufactured in ISO 9002 factories, plated as prescribed in the ASTM F1941-10 Standard Specification for Electro-deposited

Coatings on threaded fasteners, and post-plating baked according to the process articulated in SAE AMS 2759/9, Hydrogen Embrittlement Relief (Baking) of Steel Parts, Section 3.3.3.1, and SAE J78, which calls for a four-hour minimum time (the duration between the end of acid exposure and the beginning of the heating cycle in the baking furnace) for baking out entrapped hydrogen after acid treating the parts. The baking process may take from 3 to 23 hours at 375° to 425°, depending on the materials used and the plating's or finishes applied.

Grabber's 10, 12 & 14 gauge drill point fasteners are also tested for hydrogen embrittlement by benchmarks outlined in ASME B18.6.4, section 2.9.1.4, Hydrogen Embrittlement Test, and the SAE J78 4.4.1 Hydrogen Embrittlement Test Criteria, under protocols articulated in ASME B18.18.2 Inspection and Quality Assurance for High-Volume Machine Assembly Fasteners

**Sheathing to Wood, Light or Heavy Gauge Metal**

**Flat Wafer Head**



**CEMENT BOARD** Sheathing

Attaches cement board to light gauge metal (25-20 ga.) or wood. Features a .40 diameter head and GrabberGard® exterior coating.

- Flat wafer head
- ASTM B117 1500 hours
- Alternating thread
- No. 2 Phillips
- GrabberGard®

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
GCB8125HL	8 x 1-1/4-in	37-lb	5M	FLAT WAFER HEAD, #2PHIL, ALT THREAD, GRABBERGARD
GCB8158HL	8 x 1-5/8-in	31-lb	4M	FLAT WAFER HEAD, #2PHIL, ALT THREAD, GRABBERGARD
GCB8238HL	8 x 2-3/8-in	31-lb	2M	FLAT WAFER HEAD, #2PHIL, ALT THREAD, GRABBERGARD
GCB10350HL	10 x 3-1/2-in	31-lb	2M	FLAT WAFER HEAD, #2PHIL, ALT THREAD, GRABBERGARD

**Flat Wafer Head**



**CEMENT BOARD** Sheathing

Attaches cement board to steel. Features a .40 diameter head and GrabberGard® exterior coating.

- Flat wafer head
- ASTM B117 1500 hours
- Drill point
- No. 2 Phillips
- GrabberGard®

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
GCB8125SD	8 x 1-1/4-in	29-lb	5M	FLAT WAFER HEAD, #2PHIL, SELF DRILL, GRABBERGARD
GCB8158SD	8 x 1-5/8-in	29-lb	4M	FLAT WAFER HEAD, #2PHIL, SELF DRILL, GRABBERGARD
GCB8238SD	8 x 2-3/8-in	29-lb	3M	FLAT WAFER HEAD, #2PHIL, SELF DRILL, GRABBERGARD
GCB10350SD	8 x 3-1/2-in	29-lb	3M	FLAT WAFER HEAD, #2PHIL, SELF DRILL, GRABBERGARD

**Flat Wafer Head**



**HIGH DENSITY** Sheathing

Attaches high density sheathing to light gauge metal (25-20 ga.) or wood. Features .375 diameter head and GrabberGard® exterior coating.

- Flat wafer head
- Fine thread
- No. 2 LOX®
- GrabberGard®

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
GHS8114LG	8 x 1-1/4-in	26-lb	5M	FLAT WAFER HEAD, #2LOX, FINE THREAD, GRABBERGARD
GHS8158LG	8 x 1-5/8-in	29-lb	4M	FLAT WAFER HEAD, #2LOX, FINE THREAD, GRABBERGARD
GHS8238LG	8 x 2-3/8-in	27-lb	3M	FLAT WAFER HEAD, #2LOX, FINE THREAD, GRABBERGARD

**Flat Wafer Head**



**HIGH DENSITY** Sheathing

Attaches high density sheathing and fiber cement vertical siding to heavy gauge metal. Features a .375 diameter head and GrabberGard® exterior coating.

- Flat wafer head
- Winged drill point
- No. 2 LOX®
- GrabberGard®

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
GH8114LG	8 x 1-1/4-in	26-lb	5M	FLAT WAFER HEAD, #2LOX, WINGED DRILLER, GRABBERGARD
GH8158LG	8 x 1-5/8-in	25-lb	4M	FLAT WAFER HEAD, #2LOX, WINGED DRILLER, GRABBERGARD
GH8238LG	8 x 2-3/8-in	31-lb	3M	FLAT WAFER HEAD, #2LOX, WINGED DRILLER, GRABBERGARD





## Flat Wafer Head Winged Driller

### HIGH DENSITY Sheathing

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
8125SDW	8 x 1-1/4-in	27-lb	5M	FLAT WAFER HEAD, #2PHIL, WINGED DRILLER, GRABBERGARD
8158SDW	8 x 1-5/8-in	27-lb	4M	FLAT WAFER HEAD, #2PHIL, WINGED DRILLER, GRABBERGARD



Attaches high density sheathing to steel. Features a .375 diameter head and GrabberGard<sup>®</sup> exterior coating.



- Flat wafer head
- Winged drill point
- No. 2 Phillips
- GrabberGard<sup>®</sup>

## Plywood to Light Gauge Metal

### PLYLOK<sup>®</sup> Flat Head

### LIGHT GAUGE METAL Sheathing

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
GPLY150	7 x 1-1/2-in	35-lb	7.5M	FLAT HEAD, #2 PHILLIPS RECESS, YELLOW ZINC
GPLY200	7 x 2-in	31-lb	5M	FLAT HEAD, #2 PHILLIPS RECESS, YELLOW ZINC
GPLY275	7 x 2-3/4-in	25-lb	7.5M	FLAT HEAD, #2 PHILLIPS RECESS, YELLOW ZINC



"The miracle fastener"<sup>™</sup> Attaches and countersinks plywood to 25-20 gauge steel.

#### PLYLOK applications:

- ▶ Plywood to 25-20 gauge steel framing
- ▶ Plywood sheathing to 22 gauge steel deck
- ▶ Dense board to light gauge steel
- ▶ Slat-wall to 25-20 gauge steel studs
- ▶ OSB & FRP to 25-20 gauge steel studs

- Flat head
- PLYLOK<sup>®</sup> threaded point
- No. 2 Phillips
- Yellow zinc

\* Also available in 1-lb and 5-lb

## Sheathing to Heavy Gauge Metal

### PLYLOK<sup>®</sup> Wafer Head

### HEAVY GAUGE METAL Sheathing

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
101716W3	10 x 1-7/16-in	39-lb	4M	WAFER HEAD WINGED 3PT DRILLER, #2PHIL, CLEAR ZINC



Attaches 3/16-in to 3/4-in plywood to 20-14 gauge metal.



- Thin wafer head
- No. 3 winged drill point
- No. 2 Phillips
- Clear zinc

### HEAVY GAUGE METAL Sheathing

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
101716W3RG	10 x 1-7/16-in	39-lb	4M	WAFER HEAD WINGED 3PT DRILLER, #2PHIL, GRABBERGARD



Attaches 3/16-in to 3/4-in plywood to 20-14 gauge metal.



- Thin wafer head
- No. 3 winged drill point
- No. 2 Phillips
- GrabberGard<sup>®</sup>

### PLYLOK<sup>®</sup> Wafer Head

### HEAVY GAUGE METAL Sheathing

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
101716	10 x 1-7/16-in	39-lb	4M	WAFER HEAD PILOT 3 PT DRILLER, #2PHIL, CLEAR ZINC



Attaches 3/16-in to 3/4-in plywood to 20-14 gauge metal.



- Thin wafer head
- No. 3 pilot drill point
- No. 2 Phillips
- GrabberGard<sup>®</sup>

### HEAVY GAUGE METAL Sheathing

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
10158W4	10 x 1-5/8-in	39-lb	4M	WAFER HEAD PILOT 4 PT WINGED DRILLER, #2PHIL, CLEAR ZINC



Attaches 3/16-in to 3/4-in plywood to 20-14 gauge metal.



- Thin wafer head
- No. 4 winged drill point
- No. 2 Phillips
- Clear zinc

### PLYLOK<sup>®</sup> Flat Head

### HEAVY GAUGE METAL Sheathing

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
P8516F3	8 x 1-5/16-in	30lb	6M	FLAT HEAD PILOT POINT DRILLER, #2PHIL, 3 PT, CLEAR ZINC
P81516F3	8 x 1-15/16-in	31lb	4M	FLAT HEAD PILOT POINT DRILLER, #2PHIL, 3 PT, CLEAR ZINC



Attaches 3/8-in to 1-in plywood to steel joist 20-14 gauge.



- Flat head
- No. 3 pilot drill point
- No. 2 Phillips
- Clear zinc



## PLYLOK® Flat Head



### HEAVY GAUGE METAL Sheathing

Attaches 1-in or thicker, plywood to 14-8 gauge metal.

- Flat head
- No. 3 winged drill point
- No. 3 Phillips
- Clear zinc

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
12200FW3	12 x 2-in	33-lb	2M	FLAT HEAD WINGED DRILLER, #3PHIL, T-3 PT, CLEAR ZINC
12250FW3	12 x 2-1/2-in	30-lb	1.5M	FLAT HEAD WINGED DRILLER, #3PHIL, T-3 PT, CLEAR ZINC
14275FW3	14 x 2-3/4-in	33-lb	1M	FLAT HEAD WINGED DRILLER, #3PHIL, T-3 PT, CLEAR ZINC



### HEAVY GAUGE METAL Sheathing

Attaches 1-in or thicker, plywood to 14-8 gauge metal.

- Flat head
- No. 3 winged drill point
- No. 3 Phillips
- GrabberGard®

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
12200FW3RG	12 x 2-in	33-lb	2M	FLAT HEAD WINGED DRILLER, #3PHIL, T-3 PT, GRABBERGARD
12250FW3RG	12 x 2-1/2-in	30-lb	1.5M	FLAT HEAD WINGED DRILLER, #3PHIL, T-3 PT, GRABBERGARD
14275FW3RG	12 x 2-3/4-in	30-lb	1M	FLAT HEAD WINGED DRILLER, #3PHIL, T-3 PT, GRABBERGARD

## Wood to Wood or Metal

### Trim Head Streaker®



### LIGHT GAUGE METAL Trim

Attaches interior wood to light gauge metal and wood. Streaker point means quick and easy penetration while the smaller, less noticeable head provides a finished look.

- Trim head
- No. 1 square recess
- Gray phosphate

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
175100	7 x 1-1/4-in	29-lb	10M	TRIM HEAD, #1SQ, FINE THREAD, GRAY PHOSPHATE
175	7 x 1-5/8-in	49-lb	10M	TRIM HEAD, #1SQ, FINE THREAD, GRAY PHOSPHATE
185	7 x 2-1/4-in	34-lb	5M	TRIM HEAD, #1SQ, FINE THREAD, GRAY PHOSPHATE
17576	8 x 3-in	21-lb	2M	TRIM HEAD, #1SQ, FINE THREAD, GRAY PHOSPHATE

### Trim Head Driller



### HEAVY GAUGE METAL Trim

Attaches wood trim over single or double layer gypsum board to 20-14 ga. steel.

- Trim head
- Drill point
- No. 1 square recess
- Gray phosphate

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
175D	7 x 1-5/8-in	28-lb	5M	TRIM HEAD, #1SQ, DRILL POINT, GRAY PHOSPHATE
185D	7 x 2-1/4-in	29-lb	4M	TRIM HEAD, #1SQ, DRILL POINT, GRAY PHOSPHATE
175D76	8 x 3-in	22-lb	2M	TRIM HEAD, #1SQ, DRILL POINT, GRAY PHOSPHATE

### XGT™ Wood Screw



**GrabberGard® LifeTime™ Exterior Grade Coating**  
Life time warranty against fastener corrosion  
1,000 hour salt spray tested  
Lifetime warranty against corrosion

### EXTERIOR WOOD General

Dependable performance in most wood to wood applications.

Note: Staining may occur when using freshly cut lumber.

- Flat head
- Star recess
- Draw-Tite shank
- QuickGrab Point
- GrabberGard® gray

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
G6125G	6 x 1-1/4-in	30-lb	5M	FLAT HEAD, STAR 20, COARSE THREAD, GRABBERGARD GRAY
G6150G	6 x 1-1/2-in	32-lb	4M	FLAT HEAD, STAR 20, COARSE THREAD, GRABBERGARD GRAY
G7200G	7 x 2-in	33-lb	4M	FLAT HEAD, STAR 20, COARSE THREAD, GRABBERGARD GRAY
G8250G	8 x 2-1/2-in	22-lb	3.5M	FLAT HEAD, STAR 20, COARSE THREAD, GRABBERGARD GRAY
G9300G	9 x 3-in	21-lb	3M	FLAT HEAD, STAR 25, COARSE THREAD, GRABBERGARD GRAY
G10350G	10 x 3-1/2-in	20-lb	2M	FLAT HEAD, STAR 25, COARSE THREAD, GRABBERGARD GRAY

### UltraPro™ Wood Screw



**GrabberGard® LifeTime™ Exterior Grade Coating**  
Life time warranty against fastener corrosion  
1,500 hour salt spray tested  
Lifetime warranty against corrosion

### EXTERIOR WOOD General

The ultimate screw for interior and exterior wood to wood connection.

Note: Staining may occur when using freshly cut lumber.

- Scavenger II head
- LOX 2 recess
- Draw-Tite threads
- Ultracut threads
- QuickGrab Point
- GrabberGard® gold

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
U8125G	8 x 1-1/4-in	30-lb	4.5M	FLAT HEAD, #2 LOX, COARSE THREAD, GRABBERGARD GOLD
U8150G	8 x 1-1/2-in	32-lb	3.5M	FLAT HEAD, #2 LOX, COARSE THREAD, GRABBERGARD GOLD
U8200G	8 x 2-in	33-lb	2.5M	FLAT HEAD, #2 LOX, COARSE THREAD, GRABBERGARD GOLD
U9250G	9 x 2-1/2-in	22-lb	2M	FLAT HEAD, #2 LOX, COARSE THREAD, GRABBERGARD GOLD
U10300G	10 x 3-in	21-lb	1.5M	FLAT HEAD, #2 LOX, COARSE THREAD, GRABBERGARD GOLD
U10350G	10 x 3-1/2-in	20-lb	1.5M	FLAT HEAD, #2 LOX, COARSE THREAD, GRABBERGARD GOLD
U10400G	10 x 4-in	20-lb	1M	FLAT HEAD, #2 LOX, COARSE THREAD, GRABBERGARD GOLD
U10450G	10 x 4-1/2-in	20-lb	1M	FLAT HEAD, #2 LOX, COARSE THREAD, GRABBERGARD GOLD
U10500G	10 x 5-in	20-lb	1M	FLAT HEAD, #2 LOX, COARSE THREAD, GRABBERGARD GOLD

### UltraPro™ Wood Screw



### INTERIOR WOOD General

The ultimate screw for interior wood to wood connection.

Note: Staining may occur when using freshly cut lumber.

- Scavenger II head
- LOX 2 recess
- Draw-Tite threads
- Ultracut threads
- QuickGrab Point
- Yellow zinc coating

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
U8125YZ	8 x 1-1/4-in	30-lb	4.5M	FLAT HEAD, #2 LOX, COARSE THREAD, YELLOW ZINC
U8150YZ	8 x 1-1/2-in	32-lb	3.5M	FLAT HEAD, #2 LOX, COARSE THREAD, YELLOW ZINC
U8200YZ	8 x 2-in	33-lb	2.5M	FLAT HEAD, #2 LOX, COARSE THREAD, YELLOW ZINC
U9250YZ	9 x 2-1/2-in	22-lb	2M	FLAT HEAD, #2 LOX, COARSE THREAD, YELLOW ZINC
U10300YZ	10 x 3-in	21-lb	1.5M	FLAT HEAD, #2 LOX, COARSE THREAD, YELLOW ZINC
U10350YZ	10 x 3-1/2-in	20-lb	1.5M	FLAT HEAD, #2 LOX, COARSE THREAD, YELLOW ZINC
U10400YZ	10 x 3-1/2-in	20-lb	1M	FLAT HEAD, #2 LOX, COARSE THREAD, YELLOW ZINC
U10450YZ	10 x 3-1/2-in	20-lb	1M	FLAT HEAD, #2 LOX, COARSE THREAD, YELLOW ZINC
U10500YZ	10 x 3-1/2-in	20-lb	1M	FLAT HEAD, #2 LOX, COARSE THREAD, YELLOW ZINC



**Interior Wood to Wood**

**Pan Head Cabinet Screws**



**INTERIOR WOOD Cabinet**

Pan head screw used for joining together cabinet face frames. Type 17 point provides easy penetration and minimal expansion of material leaving a smooth flush surface.

- Pan head
- Type 17 point
- No. 2 square recess
- Gray phosphate

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
902Q4	6 x 1-1/4-in	24-lb	10M	PAN HEAD STREAKER, #2 SQUARE, TP17 POINT, PHOSPHATE
902Q	6 x 1-1/2-in	44-lb	5M	PAN HEAD STREAKER, #2 SQUARE, TP17 POINT, PHOSPHATE



**INTERIOR WOOD Cabinet**

Pan head screw used for joining together cabinet face frames. Type 17 point provides easy penetration and minimal expansion of material leaving a smooth flush surface.

- Pan head
- Type 17 point
- No. 2 Phillips recess
- Gray phosphate

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
90-4	6 x 1-1/4-in	44-lb	10M	PAN HEAD STREAKER, #2 PHILLIPS, TP17 POINT, PHOSPHATE
90	6 x 1-1/2-in	24-lb	5M	PAN HEAD STREAKER, #2 PHILLIPS, TP17 POINT, PHOSPHATE

**Stainless Steel**

**302 S/Steel Bugle Head Screw**



**302** 302 stainless steel

**STAINLESS STEEL Deck & Fence**

302 heavy-duty 10 gauge stainless steel designed specifically for application in redwood, cedar & pressure treated lumber.

- Bugle head
- Type 17 point
- No. 2 square recess
- 302 stainless steel

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
10200SSQ	10 x 2-in	36-lb	3.5M	BUGLE HEAD WOOD SCREW, #2SQ, TP17, 302 S/STEEL
10250SSQ	10 x 2-1/2-in	26-lb	2.5M	BUGLE HEAD WOOD SCREW, #2SQ, TP17, 302 S/STEEL
10300SSQ	10 x 3-in	22-lb	2M	BUGLE HEAD WOOD SCREW, #2SQ, TP17, 302 S/STEEL



**302** 302 stainless steel

**STAINLESS STEEL Deck & Fence**

302 heavy-duty 10 gauge stainless steel designed specifically for application in redwood, cedar & pressure treated lumber.

- Bugle head
- Type 17 point
- No. 2 Phillips recess
- 302 stainless steel

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
10200SS	10 x 2-in	36-lb	3.5M	BUGLE HEAD WOOD SCREW, #2PHIL, TP17, 302 S/STEEL
10250SS	10 x 2-1/2-in	26-lb	2.5M	BUGLE HEAD WOOD SCREW, #2PHIL, TP17, 302 S/STEEL
10300SS	10 x 3-in	22-lb	2M	BUGLE HEAD WOOD SCREW, #2PHIL, TP17, 302 S/STEEL

**305 Stainless Steel Flat Head**



**305** 305 stainless steel

**STAINLESS STEEL Deck & Fence**

305 stainless steel, flat head, star drive screws designed for deck and fence fastening where additional corrosion protection is needed. Pre-drill holes for best results.

- Flat head
- QuickGrab™ point
- Start 20 recess
- 305 stainless steel

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
GTST125	8 x 1-1/4-in	28-lb	5M	FLAT HEAD, STAR 20 RECESS, 305 S/STEEL, QUICKGRAB
GTST150	8 x 1-1/2-in	26-lb	4M	FLAT HEAD, STAR 20 RECESS, 305 S/STEEL, QUICKGRAB
GTST200	8 x 2-in	24-lb	3M	FLAT HEAD, STAR 20 RECESS, 305 S/STEEL, QUICKGRAB
GTST250	10 x 2-1/2-in	28-lb	2.5M	FLAT HEAD, STAR 25 RECESS, 305 S/STEEL, QUICKGRAB
GTST300	10 x 3-in	24-lb	2M	FLAT HEAD, STAR 25 RECESS, 305 S/STEEL, QUICKGRAB
GTST350	10 x 3-1/2-in	25-lb	1.5M	FLAT HEAD, STAR 25 RECESS, 305 S/STEEL, QUICKGRAB
GTST400	10 x 4-in	22-lb	1M	FLAT HEAD, STAR 25 RECESS, 305 S/STEEL, QUICKGRAB

**305 S/S Trim Head Deck Screw**



**305** 305 stainless steel

**STAINLESS STEEL Deck & Fence**

305 stainless steel, trim head, star drive fine thread Streaker™ screws designed for fastening decks and trim to light gauge steel or wood. Pre-drill holes for best results.

- Trim head
- QuickGrab™ point
- Start 15 recess
- 305 stainless steel

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
GTSTTR158	7 x 1-5/8-in	41.28-lb	1M	TRIM HEAD, STAR 15 RECESS, QUICKGRAB, 305 S/Steel
GTSTTR225	7 x 2-1/4-in	57.15-lb	1M	TRIM HEAD, STAR 15 RECESS, QUICKGRAB, 305 S/Steel
GTSTTR300	8 x 3-in	88.90-lb	1M	TRIM HEAD, STAR 20 RECESS, QUICKGRAB, 305 S/Steel



## Wood to Wood Framing

### Lag-Master™



**Performance Data:**

Application: Structural  
 Compliance with the following codes:  
 2015, 2012, 2009 International Building Code® (IBC)  
 2015, 2012, 2009 International Residential Code® (IRC)  
 All local code requirements must be followed and a design professional should be consulted for proper spacing requirements.  
 BEND YIELD 150,000 (psi)

### Structural Framing Fasteners

Multi-purpose wood fastener for general wood construction such as ledger boards, laminated beams, under-deck connections, trusses, joists, dimensional lumber and timber framing.

Lag-Master™ and Tie-Master™:  
 TWO FASTENERS FOR ALL YOUR  
 STRUCTURAL WOOD FRAMING NEEDS.

- ICC-ES 3531 Certified
- 3/8-in Hex head
- Type 17 point
- Draw-Tite shank
- Mechanical Galvanized

PART NO.	SIZE	COUNT	DESCRIPTION
GLM312RP	14 x 3-1/2-in	Retail Pack, 10-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM312CP	14 x 3-1/2-in	Count Pack, 50-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM312	14 x 3-1/2-in	Bulk, 500-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM400RP	14 x 4-in	Retail Pack, 10-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM400CP	14 x 4-in	Count Pack, 50-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM400	14 x 4-in	Bulk, 500-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM412RP	14 x 4-1/2-in	Retail Pack, 10-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM412CP	14 x 4-1/2-in	Count Pack, 50-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM412	14 x 4-1/2-in	Bulk, 500-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM500RP	14 x 5-in	Retail Pack, 10-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM500CP	14 x 5-in	Count Pack, 50-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM500	14 x 5-in	Bulk, 500-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM600RP	14 x 6-in	Retail Pack, 10-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM600CP	14 x 6-in	Count Pack, 50-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED
GLM600	14 x 6-in	Bulk, 500-ct	HEX HEAD, COARSE THREAD, TYPE 17 POINT, GALVANIZED



LAG-MASTER 1-1/2-IN SIDE MEMBER THICKNESS, PENETRATION INTO MAIN MEMBER							
FASTENER	LM 2 1/2-IN	LM 4-IN +	3/8-IN X 3-IN LAG SCREW	1/4-IN X 2-IN LAG SCREW	20D X 2-IN NAIL	16D X 1 5/8-IN NAIL	
DOUGLAS FIR-LARCH SCL	0.5	209	246	130	110	170	141
DOUGLAS FIR-SOUTH	0.46	197	236	120	100	157	131
NORTHERN PINE	0.42	184	226	110	100	144	120

### Tie-Master™



**Performance Data:**

Application: Structural  
 Compliance with the following codes:  
 2015, 2012, 2009 International Building Code® (IBC)  
 2015, 2012, 2009 International Residential Code® (IRC)  
 All local code requirements must be followed and a design professional should be consulted for proper spacing requirements, BEND YIELD 150,000 (psi)

### Structural Framing Fasteners

Multi-purpose wood fastener for general wood construction such as ledger boards, laminated beams, under-deck connections, trusses, joists, dimensional lumber, decks, docks, boardwalks and timber framing.

Tie-Master™ and Lag-Master™:  
 TWO FASTENERS FOR ALL YOUR  
 STRUCTURAL WOOD FRAMING NEEDS.

- ICC-ES 3531 Certified
- Flat head
- Star recess
- Type 17 point
- Draw-Tite shank
- Mechanical Galvanized

PART NO.	SIZE	COUNT	DESCRIPTION
GTIE4RP	14 X 4-in	Retail Pack, 10-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE4CP	14 X 4-in	Count Pack, 50-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE4	14 X 4-in	Bulk, 500-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE412RP	14 X 4-1/2-in	Retail Pack, 10-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE412CP	14 X 4-1/2-in	Count Pack, 50-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE412	14 X 4-1/2-in	Bulk, 500-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE5CP	14 X 5-in	Retail Pack, 10-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIESRP	14 X 5-in	Count Pack, 50-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIES	14 X 5-in	Bulk, 500-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE6RP	14 X 6-in	Retail Pack, 10-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE6CP	14 X 6-in	Count Pack, 50-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE6	14 X 6-in	Bulk, 500-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE8RP	14 X 8-in	Retail Pack, 10-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE8CP	14 X 8-in	Count Pack, 50-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE8	14 X 8-in	Bulk, 500-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE10RP	14 X 10-in	Retail Pack, 10-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE10CP	14 X 10-in	Count Pack, 50-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE10	14 X 10-in	Bulk, 500-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE12RP	14 X 12-in	Retail Pack, 10-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE12CP	14 X 12-in	Count Pack, 50-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED
GTIE12	14 X 12-in	Bulk, 500-ct	FLAT HEAD, COARSE THREAD, TYPE 17, STAR 40 GALVANIZED



TIE-MASTER 1-1/2-IN SIDE MEMBER THICKNESS, PENETRATION INTO MAIN MEMBER						
FASTENER	LM 4-IN +	3/8-IN X 3-IN LAG SCREW	1/4-IN X 2-IN LAG SCREW	20D X 2-IN NAIL	16D X 1 5/8-IN NAIL	
DOUGLAS FIR-LARCH SCL	0.5	257	130	110	170	141
DOUGLAS FIR-SOUTH	0.46	246	120	100	157	131
NORTHERN PINE	0.42	232	110	100	144	120

## GRABBER TIE-MASTER™ AND LAG-MASTER™

Grabber Tie-Master™ and Lag-Master™ deck framing fasteners have received an evaluation report from ICC Evaluation Service (ICC-ES) certifying the fasteners are in compliance with the following codes.

- ▶ 2015, 2012, and 2009 International Building Code (IBC)
- ▶ 2015, 2012, and 2009 International Residential Code (IRC)

Multipurpose Wood Fasteners described in the report are used for engineered wood-to-wood connections in accordance with the IBC and the ANSI/AWC National Design Specification for Wood Construction (NDS). The fasteners may be used under the IRC when an engineered design is submitted in accordance with IRC Section R301.1.3.



## Drywall Nails

### Smooth Shank Cup Head



#### INTERIOR WOOD Drywall

For attaching drywall to wood framing. Smooth shank design. Extra sharp long diamond point reduces the possibility of drywall cracking. Cupped saucer head is designed to countersink into drywall. The phosphate coating reduces possible chemical reaction with joint compound.

- Cup head
- Smooth shank
- Phosphate
- Long sharp diamond point (LSDP)

ITEM NO.	SIZE	WEIGHT	QTY
DWCH1316	13 GA x 19/64 x 1-3/16-in	50-lb	BOX
DWCH138	13 GA x 19/64 HD x 1-3/8-in	50-lb	BOX
DWCH158	13 GA x 19/64 HD x 1-5/8-in	50-lb	BOX
DWCH178	13 GA x 19/64 HD x 1-7/8-in	50-lb	BOX
DWCH138G	12.5 GA x 11/32 HD x 1-3/8-in	50-lb	BOX
DWCH138G-25	12.5 GA x 11/32 HD x 1-3/8-in	25-lb	BOX
DWCH158G	12.5 GA x 11/32 HD x 1-5/8-in	50-lb	BOX
DWCH178G	12.5 GA x 11/32 HD x 1-7/8-in	50-lb	BOX
DWCH238G	11.5 GA x 3/8 HD x 2-3/8-in	50-lb	BOX

### Ring Shank



#### INTERIOR WOOD Drywall

For attaching drywall to wood framing. Ring shank design reduces back out and nail pops. Extra sharp long diamond point reduces the possibility of drywall cracking.

- Ring shank
- Bright coating
- Long sharp diamond point (LSDP)

ITEM NO.	SIZE	WEIGHT	QTY
DWAT125	12.5 x 11/32 x 1-1/4-in	50-lb	BOX
DWAT138	12.5 x 11/32 x 1-3/8-in	50-lb	BOX
DWAT158	12.5 x 11/32 x 1-5/8-in	50-lb	BOX
DWAT200	12.5 x 11/32 x 2-in	50-lb	BOX
DWAT125-25	12.5 x 11/32 x 1-1/4-in	25-lb	BOX

### Smooth Shank



#### INTERIOR WOOD Drywall

For attaching drywall to wood framing. Smooth shank design. Extra sharp long diamond point reduces the possibility of drywall cracking.

- Smooth shank
- Cement coated
- Long sharp diamond point (LSDP)

ITEM NO.	SIZE	WEIGHT	QTY
DWCC125H	12.5 x 11/32 x 1-1/4-in	50-lb	BOX
DWCC138	13 x 3/8 x 1-3/8-in	50-lb	BOX
DWCC138-25	13 x 3/8 x 1-3/8-in	25-lb	BOX
DWCC200	13 x 3/8 x 2-in	50-lb	BOX

### Smooth Shank



#### INTERIOR WOOD Drywall

For attaching drywall to wood framing. Smooth shank design. Extra sharp long diamond point reduces the possibility of drywall cracking. Vinyl coating protects against possible chemical reaction to joint compound and helps prevent pullouts.

- Smooth shank
- Vinyl coated
- Long sharp diamond point (LSDP)

ITEM NO.	SIZE	WEIGHT	QTY
DWVC158	12.5 x 19/64 x 1-5/8-in	50-lb	BOX
DWVC200	12.5 x 19/64 x 1-5/8-in	50-lb	BOX

### Ring Shank Cup Head



#### INTERIOR WOOD Drywall

For attaching drywall to wood framing. Ring shank design reduces back out and nail pops. Extra sharp long diamond point reduces the possibility of drywall cracking.

- Cupped head
- Ring shank
- Phosphate coated
- Long sharp diamond point (LSDP)

ITEM NO.	SIZE	WEIGHT	QTY
DWCH138RS	13 GA x 19/64 HD x 1-3/8-in	50-lb	BOX

### Tension Pin



#### INTERIOR WOOD Drywall

Tension Pins are tempered steel designed for attaching clips, hangers, furring strips, etc. to concrete blocking.

- Flat head
- Smooth shank
- Brite coated
- 30 degree diamond point

ITEM NO.	SIZE	WEIGHT	QTY
TP118	14 x 1-1/8-in	50-lb	BOX

\*Also available in 1-lb and 5-lb sizes

Grabber premium Pro Proven<sup>®</sup> brand of collated packaged and bulk nails. Providing high performance, professional grade bulk and collated fasteners manufactured in ISO 9002, certified facilities. This comprehensive line includes several nail types including common, vinyl, box, finish, casing, sinker, roofing, drywall, flooring, and masonry, among many other nails.

These fastener are designed to meet or exceed the criterion called out in ASTM F1667 Standard Specification for Driven Fasteners: Nails, Spikes, and Staples, and the Grabber Drywall nails meet or exceed the standards called out in ASTM 514 Standard Specification for Nails for the Application of Gypsum Board, and are recognized in ESR 2618.

# SuperDrive<sup>®</sup> The Industrial Strength Fastening System

NEW SuperDrive<sup>®</sup> N7

## GRABBER SuperDrive<sup>®</sup> N7 Series

Convert your favorite driver into an  
**AUTO-FEED FASTENING TOOL!**  
...in just seconds

The new SuperDrive N7, is a light weight easy-to-use automated fastening tool designed to work with your favorite driver. N7 works with DeWalt, Makita and Hitachi screw guns.

### SuperDrive<sup>®</sup> N7 head with Drywall Clip Features:

- ▶ Quick adjustment for fastener length from 3/4-in - 2-3/16-in
- ▶ Use with screw diameters from 6 - 12 gauge
- ▶ Simple design, easy to service
- ▶ Compact and lightweight industrial-strength design
- ▶ SureLock<sup>™</sup> fine depth control adjustment
- ▶ Works with DeWalt, Makita and Hitachi drivers

### Recommended Applications:

- ▶ Drywall and sheathing to wood or metal
- ▶ Metal to metal construction
- ▶ Wood to wood construction

Use with your choice of DeWalt, Makita, Hitachi or Grabber Rocker power tool.



SDN7M1 for use with Makita XSF03, FS4200, FS4300



SDN7D2 for use with DeWalt DCF620M2 or DCF620D2



SDN7D1 for use with Rocker 4060, 4063 and DeWalt DW272, DW266, DW274K



### SUPERDRIVE - Professional Series SDN7 tools

ITEM#	Description	WORKS WITH	BIT TIPS
SDN7M1	N7 Series Head - Makita Corded and Cordless	FS4200, FS4300, XSF03	(Bit - CF155 w/E-Ring)
SDN7D1	N7 Series Head - Rocker Screw guns and DeWalt Corded	4060, 4063, DW272, DW266, DW274K	(Bit - CF155 w/E-Ring)
SDN7D2	N7 Series Head - DeWalt Cordless	DCF620M2 or DCF620D2	(Bit - CF155)

### SuperDrive<sup>®</sup> 55 Series

## SuperDrive<sup>®</sup> 55 Series

### Features and Benefits:

- ▶ Use for any screw application from 1-in - 2-in
- ▶ Use with screw diameters from 6 - 12 gauge
- ▶ Simple design, easy to service
- ▶ Compact and lightweight industrial design
- ▶ SureLock<sup>™</sup> fine depth control adjustment
- ▶ Extra long bit life with patented LOX<sup>®</sup> bits

### Recommended Applications:

- ▶ Drywall and Sheathing to Wood or Metal
- ▶ Metal to Metal
- ▶ Light or Heavy Gauge Metal
- ▶ Sub-floor
- ▶ Wood to Wood



**Item No. CW55G**  
SuperDrive 55 head  
with drywall clip

**Item No. CW55F**  
SuperDrive 55 head  
with feed track



**SuperDrive® 75 Series**

# SuperDrive® 75 Series



**Features and Benefits:**

- ▶ Use for any screw application from 5/8-in - 3-in
- ▶ Use with screw diameters from 6 - 12 gauge
- ▶ Simple design, easy to service
- ▶ Compact and lightweight industrial design
- ▶ Most versatile tool on the market
- ▶ Set and forget depth control system
- ▶ Extra long bit life with patented LOX® bits

**Recommended Applications:**

- ▶ Sub-floor/deck/dock
- ▶ Roof tile
- ▶ Wood to metal
- ▶ Drywall and sheathing
- ▶ Wood to wood construction

**Item No. CW75F**  
SuperDrive 75 head with feed track

**Item No. SDEXT3B**  
Extension rod and coupler

**Item No. EXT520**  
Drive shaft

**Item No. 38227200**  
Handle

Use with your choice of DeWalt, Makita, Hitachi or as pictured here with Grabber Rocker® power tool.

**SuperDrive® 80 Series**

# SuperDrive® 80 Series



**Item No. SDDW**  
SuperDrive 80 head with drywall clip

**Features and Benefits:**

- ▶ Compact
- ▶ Light weight
- ▶ Low profile
- ▶ Use for any screw application from 3/4-in – 1-1/4-in
- ▶ Fine depth control adjustment
- ▶ Drywall clip or feed track options

**Recommended Applications:**

- ▶ Drywall and sheathing to wood or metal
- ▶ Metal to metal

Use with your choice of DeWalt, Makita, Hitachi or as pictured here with Grabber Rocker® power tool.



# Wood Frame - Residential Collated Screw Applications

## 1 DRYWALL to Wood

### Bugle Head GRABBER®



- Bugle head
- Coarse thread
- No. 2 Phillips
- Gray phosphate

SIZE	ITEM NO.	COUNT
6 x 1-1/4-in	C300	1,000
6 x 1-5/8-in	C400	1,000
7 x 2-in	C500	1,000
8 x 2-1/2-in	C900	1,000

Attaches gypsum board and wood to wood. Extra sharp point and threads make driving easier and provide better holding power.



- Bugle head
- Coarse thread
- No. 2 Phillips
- Yellow zinc

SIZE	ITEM NO.	COUNT
6 x 1-1/4-in	C300YZ	1,000
6 x 1-5/8-in	C400YZ	1,000

Ideal for general purpose interior soft wood to wood applications. Extra sharp point and threads make driving easier and provide better holding power.

### Bugle Head Laminator



- Bugle head
- Coarse thread
- No. 2 Phillips
- Gray phosphate

SIZE	ITEM NO.	COUNT
10 x 1-1/2-in	C12	1,000

Heavy gauge drywall laminator screws are also ideal for wood to wood connection.

**NOTE:**  
Use with Grabber drywall adhesive, item number: GDWAV

## 2 SUB-FLOOR to Wood

### LOX® Recess Sub-floor Screws



- Flat head
- Coarse thread
- No. 2 LOX®
- Yellow zinc

SIZE	ITEM NO.	COUNT
8 x 1-3/4-in	C8175L3YZ	1,000
8 x 2-in	C8200L3YZ	1,000
8 x 2-1/2-in	C8250L3YZ	1,000

Designed for sub-floor attachment to wood. LOX® sub-floor screws provide a secure attachment and eliminate squeaks. Experience fewer cam-outs and an unparalleled driving experience with LOX® recess fasteners.

## 3 EXTERIOR SHEATHING to Wood

### Bugle Head GRABBER®



- Bugle head
- Coarse thread
- No. 2 Phillips
- GrabberGard® gray

SIZE	ITEM NO.	COUNT
6 x 1-1/4-in	C300RG	1,000
6 x 1-5/8-in	C400RG	1,000
7 x 2-in	C500RG	1,000

Attaches sheathing, insulation board, wood, etc. wood. Standard bugle head.

**NOTE:**  
Staining may occur when using freshly cut lumber.

## 4 DECKS & FENCE to Wood

### LOX® Recess Deck Screws



- Flat head
- Coarse thread
- No. 2 LOX®
- GrabberGard® gray

SIZE	ITEM NO.	COUNT
8 x 2-in	C8200L2M	1,000
8 x 2-1/2-in	C8250L2M	1,000
9 x 3-in	C9300L2M	1,000

Designed for exterior deck & fence construction. Experience fewer cam-outs and an unparalleled driving experience with LOX® recess fasteners.

**NOTE:**  
Staining may occur when using freshly cut lumber.



- Flat head
- Coarse thread
- No. 2 LOX®
- 316 Stainless steel

SIZE	ITEM NO.	COUNT
10 x 3-in	CB10300L316	1,000

Designed for exterior deck & fence construction. 316 Marine grade stainless steel flat head deck and fence screw. Designed for high corrosion environments. Experience fewer cam-outs and an unparalleled driving experience with LOX® recess fasteners.

# Metal Frame Applications

## 5 DRYWALL to Light Gauge Metal

### Interior Fine Thread



- Bugle head
- Fine thread
- No. 2 Phillips
- Gray phosphate

SIZE	ITEM NO.	COUNT
6 x 1-1/4-in	C368	1,000
6 x 1-5/8-in	C468	1,000
6 x 1-3/4-in	C568	1,000
6 x 2-in	C768	1,000

Attaches gypsum board to wood or 25-20 ga. steel. Standard bugle head.

## 6 DRYWALL to Heavy Gauge Metal

### Bugle Head Drill Point




- Bugle head
- Drill point
- No. 2 Phillips
- Clear zinc

SIZE	ITEM NO.	COUNT
6 x 1-1/4-in	C14Z	1,000
6 x 1-5/8-in	C15Z	1,000
6 x 1-7/8-in	C16Z	1,000

Attaches gypsum board to 20-14 ga. steel. Standard bugle head.

## RESIDENTIAL APPLICATIONS

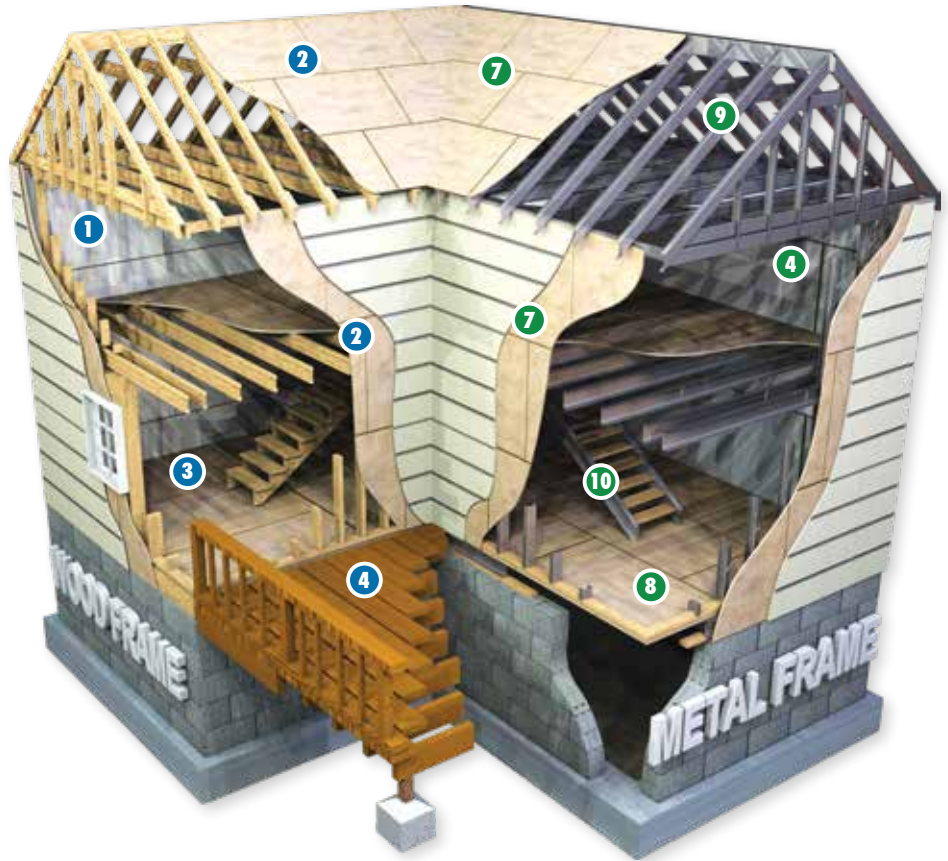

## SuperDrive is state-of-the-art:

Professional tools designed to do the job.

- ▶ **SuperDrive N7** drives screws from 3/4-in to 2-in and up to 10 gauge. N7's light-weight and compact design make it the ideal tool for hanging drywall.
- ▶ **SuperDrive 05** drives screws from 3/4-in to 2-in and is most often used for metal to metal construction.
- ▶ **SuperDrive 55** drives screws from 1-in to 2-in and is ideal for metal framing and drywall fastening applications.
- ▶ **SuperDrive 75**, drives screws from 3/4-in to 3-in and is designed for sub-floor, roof tile, docks and deck fastening applications.
- ▶ **SuperDrive 85** features a narrow indexing module designed to reach into tight corners and recess. SuperDrive 85 is perfect for metal framing, and metal roof stitching, and drives 3/4-in - 7/8-in screws.
- ▶ **SuperDrive 80** features a narrow indexing module designed to reach into tight corners and recess. SuperDrive 80 is perfect for metal framing, hanging drywall, and drives 3/4-in - 7/8-in screws.

SuperDrive is a modular, professional automated fastening system. The tools described above are combined with any number of screws and two nose-piece types to meet the specific demands of particular applications. SuperDrive can be used with or without an extension and can be used with most major screw-guns including Makita, Hitachi, DeWalt and Rocker.

## SuperDrive is simply the best:

- ▶ Will not jam
- ▶ Rapid change bits
- ▶ 50 screws per strip
- ▶ Low maintenance modular design
- ▶ Custom designed hardened nose piece
- ▶ Accurate depth control
- ▶ Drives at angles
- ▶ Works in narrow and restricted spaces

## Quality every step of the way... The reason the pros choose GRABBER®

GRABBER® sweats the small stuff, and that makes all the difference. The professionals first choice for over 40 years, GRABBER® premium quality screws are built for performance. Sharper threads mean a better driving experience so GRABBER® changes thread dies more frequently. Tight recesses mean screws are less likely to cam-out and bit tips will last longer so GRABBER® changes recess dies more frequently. Consistent heat treating means screw heads will be less likely to pop off, so GRABBER® heat treats fewer screws at a time ensuring more even heat treatment. These are small things most people don't notice, but they are also small things that make the difference between average fasteners and professional grade fasteners.

## No more strip-outs with LOX®



**LOX®**  
DRIVE SYSTEM

If you use power tools... You should use screws designed for power tools.

Torque Test  
Ultimate Torque(Nm)





**Metal Frame - Residential and Commercial Collated Screw Applications**

**GRABBER**  
**SuperDrive**<sup>®</sup> Auto-feed  
Fastening System

**80 Series**

Item No.	Description
SDDW25IT	Makita, 2500RPM, w/drywall clip
SDDWIT	Grabber Rocker, 4000RPM, w/drywall clip
SDDWITF	Grabber Rocker, 4000RPM, w/feed track

**85 Series**

Item No.	Description
SDFD25IT	Makita, 2500RPM, feed track, no extension
SDFD25XT	Makita, 2500RPM, w/extension

**N7 Series**

Item No.	Description
SDN7M1	N7 Series Head - Makita Corded and Cordless
SDN7D1	N7 Series Head - Rocker Screw guns and DeWalt Corded
SDN7D2	N7 Series Head - DeWalt Cordless


**55 Series**

Item No.	Description
5540IT	Grabber Rocker, 4000 RPM, w/feed track
5540DTG	Grabber Rocker, 4000 RPM, w/drywall clip, no extension
5540XTG	Grabber Rocker, 4000 RPM, w/extension

**75 Series**

Item No.	Description
7525XT	Grabber Rocker, 2500 RPM w/extension
7525RR	Grabber Rocker, 2500 RPM, no extension, special roofing nose-piece
7540XT	Grabber Rocker, 4000 RPM w/extension
7545HXT	Hitachi, 4500 RPM w/extension
7560XT	Makita, 6000 RPM w/extension

**COMMERCIAL APPLICATIONS**

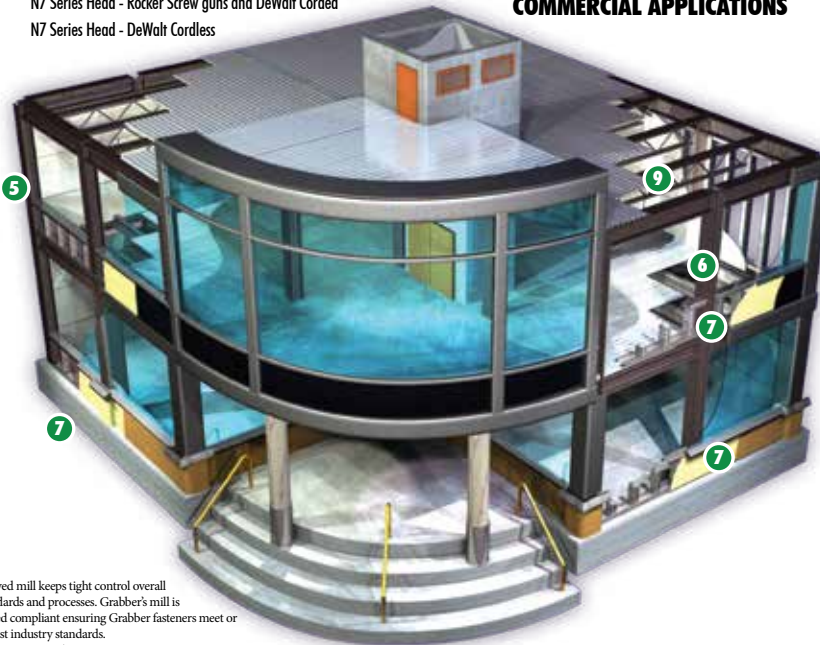

Grabber's approved mill keeps tight control overall production standards and processes. Grabber's mill is ISO 9001 certified compliant ensuring Grabber fasteners meet or exceed the highest industry standards.



**7 EXTERIOR SHEATHING to Heavy Gauge Metal**  
Bugle Head Drill Point

SIZE	ITEM NO.	COUNT
6 x 1-1/4-in	C14RG	1,000
8 x 1-5/8-in	C15GG8P	1,000
6 x 1-7/8-in	C16RG	1,000
8 x 1-1/4-in	C14RG8F2	1,000

Attaches sheathing, insulation board, wood, etc. to 20-14 ga. steel studs. Standard bugle head.

**7 SHEATHING Ply/OSB, Exterior Board to Light Gauge**  
Bugle Head STREAKER<sup>®</sup>

SIZE	ITEM NO.	COUNT
6 x 1-1/4-in	C368RG	1,000

Attaches sheathing, insulation board, wood, etc. to 25-20 ga. steel studs. Standard bugle head. Features GrabberGard<sup>®</sup> exterior coating.

**7 SHEATHING Ply/OSB, Exterior Board to Light Gauge**  
Bugle Head Vector<sup>™</sup> Point

SIZE	ITEM NO.	COUNT
6 x 1-1/4-in	C368V	1,000

Attaches gypsum board to wood or 25-20 ga. steel. Standard bugle head.

**7 HIGH DENSITY EXT SHEATHING Heavy Gauge Metal**  
Flat Wafer Head Winged Drill Point

SIZE	ITEM NO.	COUNT
8 x 1-1/4-in	CGH8114LG	1,000
8 x 1-5/8-in	CGH8158LG	1,000

Attaches high density sheathing and fiber cement vertical siding to heavy gauge metal. Features a .375 diameter head and GrabberGard<sup>®</sup> exterior coating.

**8 SUB-FLOOR Ply/OSB, Heavy Gauge Metal**  
Flat Head Stabber<sup>®</sup>

SIZE	ITEM NO.	COUNT
8 x 1-1/2-in	CS8150JBWYZ	1,000
8 x 2-in	CS8200JBWYZ	1,000

STABBER<sup>®</sup> sub-floor screws attach plywood/OSB to 22-16 gauge steel. Flat head provides a flush finished surface. LOX<sup>™</sup> recess does not require a magnetic bit tip holder and provides a sure driving experience.

**Flat Head Pilot Point**

SIZE	ITEM NO.	COUNT
8 x 1-5/8-in	CM158SDZJBW	1,000
8 x 1-3/4-in	CM175SDZJBW	1,000
8 x 2-in	CM200SDZJBW	1,000

Attaches 3/8-in to 1-in plywood to steel joist 20-14 ga. LOX<sup>™</sup> recess does not require a magnetic bit tip holder and provides a sure driving experience.

**Flat Head PLYLOK<sup>®</sup>**

SIZE	ITEM NO.	COUNT
10 x 2-in	C10200L3YZE	1,000
10 x 2-1/2-in	C10250L3YZE	1,000

10 gauge winged drill point PLYLOK<sup>®</sup> screws attach plywood/OSB sub-floor panels to steel joist 20-14 ga. LOX<sup>™</sup> recess does not require a magnetic bit tip holder and provides a sure driving experience.

SIZE	ITEM NO.	COUNT
10 x 2-in	C10200L3GE	1,000

10 gauge winged drill point PLYLOK<sup>®</sup> screws attach plywood/OSB sub-floor panels to steel joist 20-14 ga. LOX<sup>™</sup> recess does not require a magnetic bit tip holder and provides a sure driving experience.

**9 METAL FRAMING Heavy Gauge Metal**  
Flat Pan Head Drill Point

SIZE	ITEM NO.	COUNT
10-18 x 3/4-in	CFP101875LYZ	1,000
10-22 x 3/4-in	CFP102275LYZ	1,000

Flat pan head drill point fasteners designed for attaching 20-14 ga. steel.

SIZE	ITEM NO.	COUNT
12-18 x 7/8-in	CFP121878JBWZ	1,000
12-18 x 1-1/2-in	CFP121815QJBWZ	1,000

Flat pan head drill point fasteners designed for attaching 20-14 ga. steel.

**10 SHEATHING Heavy Gauge Metal to Ply/OSB**  
Modified Flat Pan Head Drill Point

SIZE	ITEM NO.	COUNT
11 x 1-3/8-in	CDMW1138	1,000

Attaches 20-14 ga. steel to plywood and OSB sheathing. LOX<sup>™</sup> recess does not require a magnetic bit tip holder and provides a sure driving experience.



## Acoustical Fasteners

### Eye-lag Screws



#### INTERIOR WOOD Hanger

Attaches hanger wire to wooden ceiling joist.

- Black phosphate

ITEM NO.	SIZE	WEIGHT	QTY
3EL	1/4 x 3-in	36-lb	1,000
4EL	1/4 x 4-in	38-lb	1,000

### Eye-lag Screws



#### LIGHT GAUGE METAL Hanger

Attaches hanger wire to steel deck or joist ceiling. 25-20 ga.

- Clear zinc

ITEM NO.	SIZE	WEIGHT	QTY
H-3	1/4 x 2-3/4-in	20-lb	1,000
H-4	1/4 x 2-in	20-lb	1,000
H-5	1/4 x 3-1/4-in	20-lb	1,000

### Eye-lag Screws



#### HEAVY GAUGE METAL Hanger

Attaches hanger wire to steel deck or joist ceiling. 20-14 ga.

- Clear zinc

ITEM NO.	SIZE	WEIGHT	QTY
H-2	1/4 x 2-in	20-lb	1,000
H-1	1/4 x 3-in	20-lb	1,000

### Eye Lag Adapter



ITEM NO.	DESCRIPTION
ELAT	Eye Lag Installation tool

### Eye Lag Pole




ITEM NO.	DESCRIPTION
LM12	Eye Lag Pole, 4' - 12'
LM18	Eye Lag Pole, 6' - 18'
LM24	Eye Lag Pole, 8' - 24'

Note: Other sizes available upon request

## CB Clips

### CB Clip

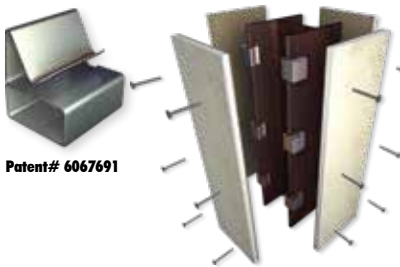

Patent# 6067691

Frame an 8-ft column or beam in under 2 minutes with Grabber column and beam clips

Column & Beam fireproofing clips provide a finished, coded correct drywall surface, ready to final decoration.

These UL listed steel framing clips recognized in: Steel Framing Member Fire Resistance Classification Design Numbers.  
Columns: X513, X517, X520, X522, X523, X528, X535  
Beams: N501, N502, N505  
See UL Fire Resistance Directory 75XL, Made in the USA

ITEM NO.	DESCRIPTION
CB60	I BEAM CLIP



- Use half the material
- No loss of usable floor space
- Snaps on by hand...no tools required
- Application time 75 seconds per column
- 12 operations per column vs. 80
- Approved by Underwriters' Laboratories

## EZ FRAMING COLLAR

### E-Z COLUMN FRAMING COLLAR



Quickly frames round support columns for finishing with drywall, paneling, etc.

E-Z Column Framing Collars are a hinged one piece construction for fast, easy framing around round columns. Collars fit both standard 3" and 3-1/2" steel columns. Use our blue collar for 4" supports



Use blue collar with 4" Columns



Use yellow collar with 3" and 3-1/2" Columns

ITEM NO.	DESCRIPTION
EZCOL3	3-in to 3-1/2-in (YELLOW)
EZCOL4	4-in (BLUE)



EZ Column is designed to merchandise on a pegboard to sit on a gondola shelf.

Transparent packaging is compact and product is visible.

## Insert Bits and Bit Holders

### Phillips Bit Tips



ITEM NO.	SIZE	LENGTH	DESCRIPTION
2BIT	No. 2	1-in	Phillips Bit (reduced)
250PB1	No. 1	2-1/2-in	Phillips Bit
250PB2	No. 2	2-1/2-in	Phillips Bit (regular)
250PB3	No. 3	2-1/2-in	Phillips Bit
30-2P	No. 2	1-15/16-in	Phillips Bit
30-3P	No. 3	1-15/16-in	Phillips Bit

### Phillips SuperDrive<sup>®</sup> Bit Tips

ITEM NO.	SIZE	LENGTH	DESCRIPTION
T1TCW153	No. 2	6-in	Phillips Bit
CF155	No. 2	6-1/4-in	Phillips Bit (SD, N7)
CF158	No. 2	6-3/8-in	Phillips Bit (SD, N7)
T1TCW178B	No. 2	7-in	Phillips Bit (SD, N7)



### STAR Bit Tips



ITEM NO.	SIZE	LENGTH	DESCRIPTION
S2T25	No. 25	1-in	STAR Bit
S2T20	No. 20	1-in	STAR Bit
62T20	No. 20	2-in	STAR Bit

### Square Bit Tips



ITEM NO.	SIZE	LENGTH	DESCRIPTION
250R1	No. 1	1-in	Square Bit
250R2	No. 2	1-in	Square Bit

### Magnetic Nut Drivers



ITEM NO.	SIZE	DESCRIPTION
MSHS14	1-1/8 x 1/4-in	Short Nut Setter
MSHS516	1-1/8 x 5/16-in	Short Nut Setter
MSHS38	1-1/8 x 3/8-in	Short Nut Setter
MSH14	1-3/4 x 1/4-in	Medium Nut Setter
MSH516	1-3/4 x 5/16-in	Medium Nut Setter
MSH38	1-3/4 x 3/8-in	Medium Nut Setter
MSHL14	2-9/16 x 1/4-in	Long Nut Setter
MSHL516	2-9/16 x 5/16-in (6-in)	Long Nut Setter
MSHL38	2-9/16 x 3/8-in	Long Nut Setter

### Magnetic Bit Holders



ITEM NO.	SIZE	DESCRIPTION
MBHW14	1/4 x 2-3/8-in	Magnetic Bit Holder
MBH143	1/4 x 3-in	Magnetic Bit Holder
MBH146	1/4 x 6-in	Magnetic Bit Holder
MBH148	1/4 x 8-in	Magnetic Bit Holder
MBH1410	1/4 x 10-in	Magnetic Bit Holder
MBH1412	1/4 x 12-in	Magnetic Bit Holder

### Quick Connect Bit Holder



ITEM NO.	DESCRIPTION
BH142	Quick Connect Bit Holder
BPBH142	Quick Connect Bit Holder (2 pack)

### LOX<sup>®</sup> 1-in Bit Tips



ITEM NO.	SIZE	LENGTH	DESCRIPTION
1002LN	No. 2	1-in	LOX Bit
SF 1002LB2	No. 2	1-in	LOX Bit (2 pc)
SF 1002LB5	No. 2	1-in	LOX Bit (5 pc)
SF 1002L	No. 2	1-in	LOX Bit (stick fit)
SF 100L3	No. 3	1-in	LOX Bit (stick fit)

### LOX<sup>®</sup> 2-in Bit Tips



▶ LOX 2



▶ LOX 3

ITEM NO.	SIZE	LENGTH	DESCRIPTION
SF 2002L	No. 2	2-in	LOX Bit (stick fit)
2002LN	No. 2	2-in	LOX Bit
2002LNB5	No. 2	2-in	LOX Bit (5 pc)
SF 200L3	No. 3	2-in	LOX Bit (stick fit)

### LOX<sup>®</sup> 3-in Bit Tips



▶ LOX 2



▶ LOX 3

ITEM NO.	SIZE	LENGTH	DESCRIPTION
SF 3002L	No. 2	3-in	LOX Bit (stick fit)
SF 300L3	No. 3	3-in	LOX Bit (stick fit)

### LOX<sup>®</sup> 2-in Double Sided Bit Tips



ITEM NO.	SIZE	LENGTH	DESCRIPTION
SF 2002LLB2	No. 2	2-in	LOX Bit (2 pc/stick fit)
SF 2002LLB5	No. 2	2-in	LOX Bit (5 pc/stick fit)

### LOX<sup>®</sup> #2 SuperDrive Bit Tips



ITEM NO.	SIZE	LENGTH	DESCRIPTION
T2153L	No. 2	6-in	LOX Bit
T2153LN	No. 2	6-in	LOX Bit (Hard)
T2178LN	No. 2	7-in	LOX Bit

### LOX<sup>®</sup> #3 SuperDrive Bit Tips



ITEM NO.	SIZE	LENGTH	DESCRIPTION
T3153LN	No. 3	6-in	LOX Bit
T3178LN	No. 3	7-in	LOX Bit

## LOX<sup>®</sup> IS DESIGNED FOR POWER TOOLS

In a recent independent torque test, LOX screws demonstrated almost double the torque capacity of a four point contact recess. Applying increased torque to the recess — the standard drive cammed out with 15 Nm (well before the screw was fully seated). In every comparable test, the LOX recess screw seated completely with an average force of 26 Nm.

### Advantages of LOX<sup>®</sup>

- ▶ Less Waste
- ▶ Less Wobble
- ▶ Less Cam Out
- ▶ Fewer Slivers
- ▶ Stick Torque
- ▶ Drives Off Angle
- ▶ Exceptional Bit Life



### TENSOR<sup>™</sup> BIT WITH REDUCED SHANK

- ▶ Tensor reduced shank bit tips minimize engagement shock extending bit tip life.
- ▶ Tensor bits are the first bits designed specifically for impact wrenches and screw guns.



LOX Stick-Fit bit tips are ideal for use with Grabber bulk screws. Stick-fit bit tips are precision bit tips designed to fit snugly into a LOX recess allowing screws to be held in place on the end of the bit tip. No magnetic bit is required. Stick-fit also means a better driving experience drive after drive with less chance for cam-outs.

**Grabber Premium Abrasive Wheels**

**Abrasives**



**Item No. G21400**  
PREMIUM CHOP SAW BLADE



**Item No. 1400**  
IMPACT METAL STUD EATER



**Item No. G41204078MS**  
ABRASIVE BLADE



**Item No. BT712**  
7-IN TURBO DIAMOND BLADE



**Item No. GDBT4512**  
4.5-IN TURBO DIAMOND BLADE

ITEM NO.	SIZE	RPM
G123321MS	12 x 3/32 x 1-in	5,100
1400	14 x 3/32 x 1-in	4,365
G21400	14 x 3/32 x 1-in	4,400
G41204078MS	4.5 x .040 x 7/8-in	13,300
G41211678MS	4.5 x 1/16 x 7/8-in	13,300
G71858MS	7 x 1/8 x (Diam-5/8)-in	8,700
G101858MS	10 x 1/8 x 5/8-in	6,100
GDBT4512	7-in	13,300
GDBT712	7-in	8,500
G60004078MS	6 x .040 x 7/8-in	8,700
GDBT4512	4-1/2-in	13,300
GDBT712	7-in	8,500

- ▶ Designed for use on stationary chop saws.
- ▶ Use as cutting tools on hand held grind machines.
- ▶ Aluminum oxide for smooth cutting and longer tool life.
- ▶ For use on iron, steel, tubing and bar.
- ▶ For structural shapes such as steel studs and ferrous applications.
- ▶ Double layer of heavy-duty fiberglass for safety.

- ▶ High diamond matrix concentration.
- ▶ Fast, smooth cutting.
- ▶ Use wet or dry.
- ▶ Cooling holes extend the life of the blade.

**Screw Drivers**

**Grabber ROCKER<sup>®</sup> Screw Driver**



ITEM NO.	RPM	AMP	WEIGHT
4063	0-4000	6.3	3.1-lb

- ▶ High torque pro clutch heavy-duty screw driver 120V AC, 50-60 Hz
- ▶ 6.3 Amp HD 0 - 4,000 RPM variable speed reversible
- ▶ Set & forget aluminum depth locator pop-on/pop-off nose piece
- ▶ Includes #2 Phillips bit-tip and magnetic bit-tip holder 3.1 lb. (1.4 Kg)



**GRABBER HAS YOUR FASTENING NEEDS COVERED**

**POWDER FASTENING SYSTEMS**

**RAMSET® Powder Fastening Systems**

**Ramset® Mastershot**



**MASTERSHOT**

**Advantages:**

- ▶ Designed for frequent use providing professional fastening results in a variety of concrete, masonry or steel applications
- ▶ The MasterShot is a traditional trigger operated tool
- ▶ Ergonomic design for operator comfort
- ▶ Positive barrel and load retention prevents barrel from opening freely, allowing easy horizontal and overhead fastening
- ▶ Powder load automatically ejects after each use
- ▶ Quiet operation

**Specifications:**

- ▶ .22 Single Shot Tool
- ▶ Uses standard .22 caliber single shot powder loads:  
2 (Brown), 3 (Green), 4 (Yellow)
- ▶ Weight: 4.4 lbs.

**Mastershot (Common Fasteners)**

SHANK IN	LENGTH MM	APPLICATION	ITEM NO.
3-in	76.2-mm	2 X 4 TO CONCRETE	1524SDP (WASHERED)
2-1/2-in	63.5-mm	2 X 4 TO CONCRETE	1516SDC (WASHERED)
3/4-in	19.1	DRYWALL TO CONCRETE	1506B

**Ramset® XT540 — Semi Automatic**



**Item No. XT540**

**Advantages:**

- ▶ Power adjust dial down two full loads
- ▶ Quick & easy front end maintenance
- ▶ Fully automatic piston return
- ▶ Shock absorbing rubber grip
- ▶ Ergonomically balanced
- ▶ Trigger lock & hand guard for safety

**Specifications:**

- ▶ Low recoil .27 caliber strip tool
- ▶ Capacity for up to 3-in pin

The Ramset XT540 was specifically designed for the commercial framer for heavy-duty interior and exterior applications. The XT540's combination of high power and durability make it the ideal tool for the following applications:

- ▶ Driving 1-1/4-in embedment for perimeter track
- ▶ Fastening track & clips to structural steel
- ▶ Track to hard concrete
- ▶ Excellent compliment to the Ramset TrakFast tool

**XT540 (Common Fasteners)**

PIN LENGTH	LENGTH MM	EMBEDMENT LENGTH	ITEM NO.
.545-in	13.8-mm	1/2-in PREMIUM STEEL PIN	TE12
13/16-in	20.6-mm	3/4-in TRUE EMBEDMENT PIN	TE34
1-5/16-in	33.3-mm	1-1/4-in TRUE EMBEDMENT PIN	TE114



**POWDER FASTENING SYSTEMS**

**GRABBER HAS YOUR FASTENING NEEDS COVERED**

**Ramset® Cobra — Semi Automatic**



Item No. COBIII

**Advantages:**

- ▶ Semi-automatic .27 caliber tool – uses strip loads
- ▶ Padded recoil – absorbing handle for greater operator comfort
- ▶ Fastens up to 3-in drive pins and threaded studs – ideal for general construction applications
- ▶ Full one year warranty

**Specifications:**

- ▶ .27 caliber 10 shot strip loads: 3 (Green), 4 (Yellow), 5 (Red)
- ▶ Weight: 4.5 pounds
- ▶ Length: 13-1/4-in
- ▶ Muzzle bushing O.D.: 9/16-in
- ▶ Maximum pin length: 2-1/2-in (3-in w/washer)

**Cobra (Common Fasteners)**

SHANK IN	LENGTH MM	APPLICATION	ITEM NO.
3-in	76.2-mm	2 X 4 TO CONCRETE	1524SDP
2-1/2-in	63.5-mm	2 X 4 TO CONCRETE	1516SDC
3/4-in	19-mm	DRYWALL TRACK TO CONCRETE	1506

**Ramset® Viper — Semi Automatic**

Item No. VIPER4



**Advantages:**

- ▶ Automatic load advance
- ▶ Automatic piston return
- ▶ Overdrive protection
- ▶ Open front-end design
- ▶ Simplified barrel retention collar
- ▶ Stable steel collar
- ▶ Uses Viper pole system

**Specifications:**

- ▶ .27 Caliber strip tool
- ▶ Semi-Automatic
- ▶ Designed specifically for overhead applications
- ▶ 3 year warranty
- ▶ .27 caliber 10-shot strip loads, 3 (green), 4 (yellow), 5 (red)
- ▶ Weight: 4.5 lbs.
- ▶ Length: 17-in
- ▶ Maximum pin length: 1-1/2-in

**Viper (Common Fasteners)**

SHANK IN	LENGTH MM	APPLICATION	ITEM NO.
1-in	25.4-mm	THREADED ROD HANGER	14TRHSS10
1-in		THREADED ROD HANGER	38TRHSS10
1-in		CEILING CLIP	SDC100
1-1/4-in	31.8-mm	CEILING CLIP	SDC125
7/8-in		CEILING CLIP	SPC78
1-1/4-in	31.8-mm	CEILING CLIP	SPC114



**GAS FASTENING SYSTEMS**

**GRABBER HAS YOUR FASTENING NEEDS COVERED**

**RAMSET® Electronic Fuel Injection**

**Ramset® T3MAG**



Item No. T3MAG

**Advantages:**

- ▶ Higher stick rate (.125 diameter pin)
- ▶ 25% more power
- ▶ Easy push-down force
- ▶ Deep leg track capable
- ▶ 45 pin magazine capacity
- ▶ Newly designed fitted dust shield
- ▶ Battery charger provides constant charging even with voltage drops.
- ▶ ICC approved (ESR -1955)

**Specifications:**

- ▶ Weight: 9.2 lbs
- ▶ Height: 15-in
- ▶ Length: 18-1/2-in
- ▶ Width: 4.3-in
- ▶ Fuel cell design: One step insert and click
- ▶ 45 pin magazine capacity
- ▶ Fastener assembly: 15 pin (strip)
- ▶ Fastener length capability: 0.5 – 1.0-in
- ▶ Fastener pin diameter: .125-in
- ▶ Fuel cell capacity: Over 100 shots
- ▶ Shots per battery charge: 3000 (approx.)

**T3MAG (Common Fasteners)**

SHANK IN	LENGTH MM	APPLICATION	ITEM NO.
1/2-in STEEL PIN W/T3 FUEL	1000	5 BOXES (5000)	T3012
3/4-in CONCRETE PIN W/T3FUEL	1000	5 BOXES (5000)	T3034B
3/4-in STEP-SHANK CONCRETE PIN W/T3FUEL	1000	5 BOXES (5000)	T3034S
1-in CONCRETE PIN W/T3FUEL	1000	5 BOXES (5000)	T3100

**ACCESSORIES**

T3FUEL	FUEL CELL
B0092	BATTERY

**Ramset® TrakFast**



Item No. TF1200

**Still the most revolutionary fastening system in the construction industry**

Since its introduction in 1991, TrakFast has been the tool of choice for both interior and exterior contractors. The TrakFast Automatic Fastening System fastens all types of track, from standard track to hat channel, deep leg, Z, and J channel. Contractors continue to report tremendous savings when using TrakFast for high production fastening.

**Advantages:**

- ▶ Increased durability and reliability
- ▶ Off position to prevent battery drainage
- ▶ Three to five times faster than powder tools
- ▶ 42 pin magazine
- ▶ Piston automatically resets
- ▶ No recoil
- ▶ No licensing required
- ▶ No changing loads
- ▶ Narrow nose & profile
- ▶ 2 year warranty (6 months on wearable parts)

**Specifications:**

- ▶ Gas technology
- ▶ Fully automatic
- ▶ 1-1/2-in pin capacity
- ▶ 42 pin magazine capacity
- ▶ Length: 17.5-in
- ▶ Height: 15-in
- ▶ Weight: 8.3-lbs.
- ▶ Maximum cycles per second: 2
- ▶ Fuel cell: 1000 shots
- ▶ Battery (charged): 3000 shots

**TF1200 (Common Fasteners)**

SHANK IN	LENGTH MM	APPLICATION	ITEM NO.
1/2-in		PIN,	FPP012
1/2-in	12.7-mm	STEP DOWN PIN	FPP012S
3/4-in	19.1-mm	BLACK PIN	FPP034B
3/4-in		STEP DOWN PIN,	FPP034S
1-in		Pin Clear Zinc Collated	FPP100
1-1/2-in		Pin Clear Zinc Collated	FPP114
3/4-in		PIN BREAKAWAY STRIP	FPP034T
1-in		PIN	FPP100T
1-1/2-in		PIN	FPP112T
1-1/2-in		PIN	FPP114T
1-3/8-in		Wood to Metal Pin	PLY138

**ACCESSORIES**

TFUEL	FUEL CELL
B0092	BATTERY



**Air and Pneumatic Fastening Systems**

**Aerosmith® 400PSI Pneumatic System**



Item No. HN25C

**Advantages:**

- ▶ Lightweight - only 4.4 lbs
- ▶ Free of powder loads
- ▶ No Licensing Required
- ▶ Slim nose drives pins 1/4" from wall
- ▶ Depth of drive adjustment
- ▶ 100 pin coil capacity

**Applications:**

- ▶ Drywall track to concrete
- ▶ Steel to steel

**Specifications:**

- ▶ Height 12" (304 mm)
- ▶ Width 3-1/4" (83 mm)
- ▶ Length 12" (304 mm)
- ▶ Weight 4.4 lbs (2 kgs)
- ▶ Recommended Operating Pressure 210-320psi (14-22 bar)
- ▶ Loading Capacity Up to 100 fasteners

**Pneumatic Fasteners**

ITEM NO.	LENGTH	SHANK DIAM.	APPLICATION
2193HP	3/4-in	.109 x .250	LGS TRACK TO HARD CONCRETE
2193HPST	3/4-in	.104 x .118	LGS TRACK TO HARD CONCRETE
3193HPST	3/4-in	.104 x .125	LGS TO CONCRETE IN PLACE OF .157 DIAMETER PINS

\* 3193HPST INCLUDES CARRY CASE

**Aerosmith® VersaPin**



Item No. ST4200

**Advantages:**

- ▶ Lightweight - only 4.8 lbs
- ▶ Depth of Drive Adjustment
- ▶ 360° adjustable exhaust deflector
- ▶ Uses Aerosmith brand flat wire welded fasteners
- ▶ Anti-Double fire mechanism
- ▶ Trigger Lock to prevent accidental firing
- ▶ Anti-Skid pad
- ▶ Shock absorbing comfort rubber handle
- ▶ Belt Clip
- ▶ Comes with plastic carrying case

**Applications:**

- ▶ Plywood to Steel 14 – 18 ga (68-43 mil)
- ▶ Exterior Gypsum to Steel 14 – 18 ga (68-43 mil)
- ▶ Cement Fiber Board to Steel 14 – 18 ga (68-43 mil)
- ▶ Steel to Steel 14 – 18 ga (68-43 mil)
- ▶ Stucco Lath Applications 14 – 18 ga (68 - 43 mil)

**Specifications:**

- ▶ Height 11-1/4" (285 mm)
- ▶ Width 4-2/5" (112.2 mm)
- ▶ Length 9-1/2" (241.5 mm)
- ▶ Weight 4.8 lbs (2.2 kgs)
- ▶ Recommended Operating Pressure 70-120 psi (4.9-8.3 bar)
- ▶ Loading Capacity Up to 200 fasteners

**Fasteners**

ITEM NO.	LENGTH	SHANK DIAM.	APPLICATION
2325A	1 1/4-in	.312 x .100	PLYWOOD AND EXTERIOR GYPSUM TO LGS FRAMING
2385AG	1 1/2-in	.312 x .100	HARDIE PLANK LAP SIDING TO LGS FRAMING





## AIR FASTENING SYSTEMS

**GRABBER HAS YOUR FASTENING NEEDS COVERED**

### Air Compression

#### MAX® PowerLite™ High Pressure Air Compressor



Item No. AKHL1250E

#### Pumps up to 500PSI and is Light Weight, just 41.4-lbs

The DC Brush-less Motor is more powerful, quiet and lighter than the conventional motors. Inverter motor circuit adjusts RPM to extract maximum performance voltage level.

#### Specifications:

- ▶ Light weight and mobile (41.4-lbs)
- ▶ DC brush-less motor
- ▶ 14 1/2-in x 12 3/8-in x 23 1/2-in
- ▶ 2.5 gallon tank volume
- ▶ 2 HP motor
- ▶ 3.5 CFM at 100 PSI, 2.8 CFM at 300 PSI air displacement
- ▶ 3,300 RPM rated speed (2,200 RPM in quiet mode)



### Brand Name Access Doors

## GRABBER GIVES YOU ACCESS ACCESS DOORS

#### Applications:

- ▶ Fire Rated Access
- ▶ Drywall Access
- ▶ Recessed Access
- ▶ Stainless Steel Access
- ▶ Interior Access
- ▶ Exterior Access
- ▶ Ceiling/Attic access
- ▶ Security Access
- ▶ Valve Access
- ▶ Plumbing Access
- ▶ Cabinet Box Access
- ▶ Plaster Access

**Your Grabber dealer has information on brands, sizes and styles of doors to accommodate your trade needs.**





**ITW Red Head® Truebolt and Trubolt + Mechanical Anchoring System**

**Trubolt +**



**Seismic Wedge Anchor bolt**

Attaches to concrete and CMU block:

- ICC-ESR 3772 for Concrete
- ICC-ESR 4058 for CMU
- 2015 IBC Compliant
- COLA Approved
- FBC Approved
- Seismic, cracked & un-cracked concrete rated

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
TB4C-1416*	1/4 x 1 3/4-in	3.36	100	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-1422	1/4 x 2 1/4-in	3.82	100	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-1432	1/4 x 3 1/4-in	4.78	100	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-3822*	3/8 x 2 1/4-in	4.28	50	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-3826*	3/8 x 2 3/4-in	4.87	50	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-3830	3/8 x 3-in	5.03	50	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-3834	3/8 x 3 1/2-in	5.58	50	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-3836	3/8 x 3 3/4-in	5.98	50	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-3850	3/8 x 5-in	7.53	50	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-3870	3/8 x 7-in	9.73	50	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-1226*	1/2" x 2 3/4-in	4.62	25	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-1236	1/2 x 3 3/4-in	5.81	25	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-1242	1/2 x 4 1/4-in	6.26	25	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-1244	1/2 x 4 1/2-in	6.41	25	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-1254	1/2 x 5 1/2-in	7.53	25	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-1270	1/2 x 7-in	9.36	25	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-58100	5/8 x 10-in	8.22	10	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-5834*	5/8 x 3 1/2-in	3.68	10	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-5844	5/8 x 4 1/2-in	4.2	10	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-5850	5/8 x 5-in	4.65	10	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-5860	5/8 x 6-in	5.35	10	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-5870	5/8 x 7-in	6.11	10	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-5884	5/8 x 8 1/2-in	7.17	10	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-34100	3/4 x 10-in	12	10	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-34120	3/4 x 12-in	15.84	10	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-3442*	3/4 x 4 1/4-in	6.08	10	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-3446*	3/4 x 4 3/4-in	6.61	10	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-3454	3/4 x 5 1/2-in	7.4	10	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-3462	3/4" x 6 1/4-in	8.24	10	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-3470	3/4 x 7-in	8.99	10	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-3484	3/4 x 8 1/2-in	10.46	10	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-10060	1 x 6-in	7.70	5	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-10090	1 x 9-in	10.84	5	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-100120	1 x 12-in	14.34	5	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-11490	1 1/4 x 9-in	13.55	5	TRUBOLT + CARBON STEEL WEDGE ANCHOR
TB4C-114120	1 1/4 x 12-in	17.93	5	TRUBOLT + CARBON STEEL WEDGE ANCHOR

**Advantages:**

- ▶ One Universal Wedge Anchor
- ▶ It has all the approvals the construction industry demands
- ▶ Complete breadth of line
- ▶ Maximum flexibility in edge distance, anchor spacing & tension strength

**Specifications:**

- ▶ Category 1 Performance
- ▶ Zinc Plated Carbon Steel to ASTM B633, SC1, Type 3
- ▶ Meet or exceed US Government GSA Specification A-A-1923A
- ▶ Meets BUY AMERICAN ACT



**Trubolt 304 Stainless Steel**



**Wedge Anchor bolt**

Attaches to concrete

- ICC-ESR 2251
- UL Certified
- FM Certified
- Caltrans

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
WW-1416	1/4 x 1-3/4-in	3.2	100	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-1422	1/4 x 2-1/4-in	3.7	100	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-1432	1/4 x 3-1/4-in	4.8	100	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-3822	3/8 x 2-1/4-in	4.1	50	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-3826	3/8 x 2-3/4-in	4.8	50	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-3830	3/8 x 3-in	5.1	50	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-3836	3/8 x 3-3/4-in	6	50	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-3850	3/8 x 5-in	7.5	50	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-1226	1/2 x 2-3/4-in	4.7	25	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-1236	1/2 x 3-3/4-in	5.8	25	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-1242	1/2 x 4-1/4-in	6.3	25	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-1254	1/2 x 5-1/2-in	7.7	25	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-1270	1/2 x 7-in	9.4	25	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-5834	5/8 x 3-1/2-in	3.6	10	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-5842	5/8 x 4-1/4-in	4.2	10	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-5850	5/8 x 5-in	4.8	10	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-5860	5/8 x 6-in	5.5	10	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-5870	5/8 x 7-in	6.2	10	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-5884	5/8 x 8 1/2-in	8	10	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-3446	3/4 x 4-3/4-in	6.7	10	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-3454	3/4 x 5-1/2-in	7.5	10	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-3462	3/4 x 6 1/4-in	8.3	10	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-3470	3/4 x 7-in	9.2	10	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-3484	3/4 x 8 1/2-in	12.3	10	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-34100	3/4 x 10-in	13.5	10	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-10060	1 x 6-in	8.3	5	TRUBOLT 304 S.S. WEDGE ANCHOR
WW-10090	1 x 9-in	11.4	5	TRUBOLT 304 S.S. WEDGE ANCHOR





**Trubolt 316 Stainless Steel**

**Wedge Anchor bolt**



Attaches to concrete

- ICC-ESR 2251
- UL Certified
- FM Certified
- Caltrans

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
SWW-1422	1/4 x 2-1/4-in	3.7	100	TRUBOLT 316 S.S. WEDGE ANCHOR
SWW-1432	1/4 x 3-1/4-in	4.8	100	TRUBOLT 316 S.S. WEDGE ANCHOR
SWW-3826	3/8 x 2-3/4-in	4.8	50	TRUBOLT 316 S.S. WEDGE ANCHOR
SWW-3830	3/8 x 3-in	5.2	50	TRUBOLT 316 S.S. WEDGE ANCHOR
SWW-3836	3/8 x 3-3/4-in	6	50	TRUBOLT 316 S.S. WEDGE ANCHOR
SWW-3850	3/8" x 5-in	7.5	50	TRUBOLT 316 S.S. WEDGE ANCHOR
SWW-1236	1/2 x 3-3/4-in	5.8	25	TRUBOLT 316 S.S. WEDGE ANCHOR
SWW-1242	1/2 x 4-1/4-in	6.5	25	TRUBOLT 316 S.S. WEDGE ANCHOR
SWW-1254	1/2 x 5-1/2-in	7.8	25	TRUBOLT 316 S.S. WEDGE ANCHOR
SWW-5850	5/8x 5-in	4.8	10	TRUBOLT 316 S.S. WEDGE ANCHOR
SWW-5870	5/8 x 7-in	6.7	10	TRUBOLT 316 S.S. WEDGE ANCHOR

**ITW Red Head® Concrete and Masonry Adhesive Anchoring Solutions**

**Red Head® A7+ Hybrid Adhesive**



High strength, quick cure, all purpose, all-weather concrete and masonry anchoring adhesive

- High Strength, Quick Cure, All-Weather
- ICC-ES ESR-3909 for Cracked Concrete and Seismic Approvals
- ICC-ES ESR-3951 for Masonry Approval
- The only Quick-Cure to work in all wet conditions!
- Cures in 45 minutes at 70F
- Temp Range: 14F-110F

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
A7P-10	9.5-oz	1.3	6	Red Head A7+ 9.5oz Cartridge w/ Nozzle
A7P-28	28-oz	3.6	4	Red Head A7+ 28oz Cartridge w/ Nozzle
A7P-500KIT	5-oz	1	8	Red Head A7+ 5oz Kit w/ Hand Crank & Nozzle
A7P-501KIT	5-oz	1	8	Red Head A7+ 5oz Kit w/ Reuse Piston & Nozzle
A100		3.1	1	Manual Dispenser for A7P-10
A102-V3		4.7	1	Manual Dispenser for A7P-28
A200		7.7	1	Pneumatic Dispenser for A7P-28
A300		13	1	Battery Dispenser for A7P-28, C6P-30, and G5P-30

**Red Head® C6+ Epoxy**



Maximum Strength Epoxy

- Maximum Strength, Same-Shift Cure Time, High Temperature
- ICC-ES Cracked Concrete and Seismic approvals
- Approved for use in core-drill holes without a roughening tool, even in cracked concrete
- ICC-ES Masonry Approval
- Cures in 2 hours at 110F, 2.75 hours at 90F, and 6.5 hours at 70F
- At least 10 minutes of nozzle life
- Temp Range: 41F-110F

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
C6P-15	15-oz	2	6	Red Head C6+ 15oz Cartridge w/ Nozzle
C6P-30	30-oz	3.7	4	Red Head C6+ 30oz Cartridge w/ Nozzle
D100		4.9	1	Manual Dispenser for C6P-15 & G5P-15
D102		5.2	1	Manual Dispenser for C6P-30 & G5P-30
D201		5.9	1	Pneumatic Dispenser for C6P-15 & G5P-15
D300		13	1	Battery Dispenser for C6P-15 & G5P-15
A300		13	1	Battery Dispenser for A7P-28, C6P-30, and G5P-30

**Red Head® G5+ Epoxy**



Everyday Epoxy

- Light-Medium Duty Strength, Moderate Cure Time, Warm Weather
- ICC-ES Cracked Concrete and Seismic Approvals
- Cures in 6 hours at 90F and in 4 hours at 110F
- At least 10 minutes of nozzle life
- Temp Range: 41F-110F

PART NO.	SIZE	WEIGHT	QTY	DESCRIPTION
G5P-15	15-oz	2	6	Red Head G5+ 15oz Cartridge w/ Nozzle
G5P-30	30-oz	3.7	4	Red Head G5+ 30oz Cartridge w/ Nozzle
D100		4.9	1	Manual Dispenser for C6P-15 & G5P-15
D102		5.2	1	Manual Dispenser for C6P-30 & G5P-30
D201		5.9	1	Pneumatic Dispenser for C6P-15 & G5P-15
D300		13	1	Battery Dispenser for C6P-15 & G5P-15
A300		13	1	Battery Dispenser for A7P-28, C6P-30, and G5P-30





**Adhesives**

**ADHESIVES**



Professional-strength Adhesives. Dry-wall and sub-floor adhesive are available in VOC-compliant water-based and solvent-based formulas.

PART NO.	DESCRIPTION
GDWAV	ADHESIVE, SOLV BASED DRYWALL
GDWAW	ADHESIVE, WATER BASED
GSCSF	SEALANT, SOUND
GSAFV	ADHESIVE, SOLV BASED SUB-FLOOR
GSAFW	ADHESIVE, WATER BASED
747	HANGTITE SPRAY ADHESIVE

**Firestop**

**FIRE CAULK**



Single component smoke and fire stopping sealant for wall and floor penetrations and other construction gap applications. During a fire, GrabberGuard IFC expands to maintain a tight seal against fire and smoke.

**GrabberGuard IFC** expands to maintain a tight seal against fire and smoke.

**GrabberGuard EFC** absorbs heat and provides a fire barrier against fire and smoke.

**GrabberGuard** fire caulks and sprays have been tested in accordance with rigorous industry standards and have been determined to be fungi resistant, low VOC and formaldehyde free.

PART NO.	DESCRIPTION
GGIFC10	FIRE CAULK 10 oz. GRABBER GARD, INTUMESCENT
GGIFC29	FIRE CAULK, 29oz. CART. GRABBER GARD, INTUMESCENT
GGEFC20	FIRE CAULK, 20 oz. SAUSAGE GRABBER GARD, ENDOTHERMIC
GGEFC10	FIRE CAULK, 10.1 oz. CART. GRABBER GARD, ENDOTHERMIC
GGEFC29	FIRE CAULK, 29 oz. GRABBER GARD, ENDOTHERMIC
GGEFC20	FIRE CAULK, 20 oz. SAUSAGE GRABBER GARD, ENDOTHERMIC

**Professional Scaffolding and Accessories**

**GRABBER HAS THE SCAFFOLD AND OTHER JOB-SITE ACCESSORIES YOU NEED**



**Drywall Carts**



**Mini Scaffold**



**6-Foot Scaffold**



**Dump Bins**



One-Piece Seamless Molded Body  
**GDCF34**

Will Not Corrode or Absorb Moisture  
Patent pending lower full-tilt action handle

# DUMPCART

**STACKABLE • SPACE SAVER • VERSATILE**

OUR RUGGED, HIGH DENSITY PLASTIC TRASH CARTS ARE IDEAL FOR HANDLING THE DEBRIS ON ANY JOB SITE.

- ▶ FITS THROUGH STANDARD DOORWAYS AND ELEVATORS
- ▶ QUICK AND EASY ASSEMBLY
- ▶ SAVE FREIGHT WITH HIGH STACKABLE FEATURE



**GDCL34** - (lid sold separately)

**GDCL34** 1 Yard Lid

Hinged Lid Allows Easy Access to Contents Without Removal

## Dump Cart

PART NO.	DESCRIPTION
GDCF34	3/4 CUBIC YARD DUMP CART WITH 12-IN WHEELS. 1000-LBS CAPACITY
GDCL34	LID - EXPANDS CART TO 1-YD CAPACITY
GDCW12	REPLACEMENT 12-IN WHEEL
GDCC5	REPLACEMENT 5-IN STEERING CASTER
GDCAX19	REPLACEMENT AXLE



**Lasers**

**Brand Name Precision Lasers**

**GRABBER HAS THE LASERS YOU DEPEND ON — BRANDS YOU TRUST**

- ▶ Green Lasers
- ▶ Red Lasers
- ▶ Cross line
- ▶ Vertical
- ▶ Horizontal
- ▶ Two, Three and 5-Beam
- ▶ Pointer
- ▶ Multi-Purpose
- ▶ Self Leveling
- ▶ 360° reference



**PACIFIC LASER SYSTEMS® • TRIMBLE® • DEWALT®**

## Coatings and finishes

### Black/Gray Phosphate **Salt spray results ASTM B117 24 hours, no red rust**

Recommended for interior applications.

### Clear Zinc **Salt spray results ASTM B117 12 hours, no red rust**

Recommended for interior applications and exterior applications where the fastener will be encapsulated, i.e. the attachment of lathing prior to the application of stucco.

### Yellow Zinc **Salt spray results ASTM B117 24 hours, no red rust**

Recommended for interior applications and exterior applications where the fastener will be encapsulated, i.e. the attachment of lathing prior to the application of stucco.

### **Salt spray results ASTM B117 1000 hours, 15 cycles Kesternich per DIN 50018, no red rust**

GrabberGard® metal finish is a high-grade proprietary metal surface processing technology that prevents corrosion. It is a duplex coating constituting a zinc substrate and organic polymer topcoat. These layers are bonded together through thermal fusion, and this unique method of combining layers results in a combination of the coating films. GrabberGard® treatment does not attribute its anti-corrosion properties to any single material when combined has superb corrosion resistant qualities. Suitable for use in non coastal areas with all pressure treated lumbers including ACQ.

### **GrabberGard® 15 — Salt spray results ASTM B117 1500 hours, 20 cycles Kesternich per DIN 50018, no red rust**

GrabberGard® metal finish is a high-grade proprietary metal surface processing technology that prevents corrosion. It is a ROHS compliant coating constituting a Hex valent chrome free zinc substrate and organic polymer topcoat. The distinguishing feature of GrabberGard® 15 is the joining and encapsulation the substrate with the fused organic surface coating. GrabberGard® 15 treatment does not attribute its anti-corrosion properties to any single material, but the synergy of these two layers, which when combined has superb corrosion resistant qualities. Suitable for use between 1km and 50km from the ocean, or from 150m to 1km from a salt water inlet or creek, and with all pressure treated lumbers including ACQ, may be used with Aluminum without galvanic reaction.

### **Salt spray results ASTM B117 1000 hours, no red rust**

Type 302 stainless steel is an extremely tough, ductile grade that demonstrates superior corrosion resistance compared to 400 series, or zinc plated fasteners. This grade as well as the rest of the 300 series we offer can be used in MRI and other applications calling out non-magnetic parts. Suitable for exterior grade that is not in coastal areas when used in conjunction with untreated wood, MCQ, CCA or Borate and other NON ACQ treated lumber.

### **305 Stainless Steel Non-Coastal Grade**

Type 305 stainless steel is a nickel chromium austenitic grade of stainless steel and is inherently non-magnetic. This material is not hardened by heat treatment and provides very good corrosion protection. Suitable for exterior grade that is not in coastal areas when used in conjunction with treated or untreated wood, including ACQ.

### **316 Stainless Steel Marine Grade**

Type 316 stainless steel is a nickel chromium austenitic grade of stainless steel and is inherently non-magnetic. This material provides the highest level of corrosion protection. This austenitic stainless steel has an increased molybdenum content to increase its resistance to corrosion when compared to other 300 series alloys. It is suitable for use in coastal areas and is considered Marine grade stainless. Suitable for exterior grade in coastal areas, and around pools and spas, acidic conditions, and can be used in conjunction with treated or untreated wood, including ACQ.

### **Mechanical Galvanized**

Mechanical Galvanizing results in a very uniform coating thickness reducing thread fit issues at assembly, making it a preferable coating for structural applications. Not only does Mechanical Galvanizing provide excellent coating uniformity, but the process is consistent from batch to batch. Mechanical Galvanizing is a room temperature process in which zinc coatings are applied to fasteners without the electricity used for electroplating, and without heat used for Hot-Dip Galvanizing. This eliminates hydrogen embrittlement issues, and tempering issues with hardened fasteners, the room temperature process ensures no chance of re-tempering or softening high strength fasteners and guards against hydrogen embrittlement because the fasteners are also never exposed to acid pickling in the process. All exposed surfaces can be coated very uniformly, and are processed to minimize thread nicking. The requirements for Mechanical Galvanizing are covered in ASTM B695, "Coatings of Zinc Mechanically Deposited on Iron and Steel" and are applied to a Class 55 thickness (.0022"), to provide you with the corrosion protection you expect from Galvanized products.

### **Grabber DRIVAL® fasteners are protected against hydrogen embrittlement failure.**

Hydrogen embrittlement (HE) refers to any time-delayed failure mechanism that is aggravated or accelerated because of the presence of hydrogen. Most self-drilling fasteners are case-hardened, which provides the necessary hardness for drilling and tapping, but leaves the screws vulnerable to (HE) due to their high surface hardness and the opportunity for introduction of hydrogen during the electroplating and cold working manufacturing processes. DRIVAL® fasteners are specially designed and processed to help prevent hydrogen-induced brittle failures. Each fastener undergoes a post plating baking process to ensure the optimal combination of hardness and hydrogen relief required for maximum performance in the field.

Testing of this product, in accordance with ASTM standards, has proven that DRIVAL® fasteners provide the same resistance to hydrogen embrittlement (HE) failure as a grade 5 fastener. Grabber's hardening and baking processes provide unmatched performance.



# Grabber has you covered with more than just great fastening products. . .

To put it simply, Grabber can help you build a better product while simultaneously making you more money. Through constant innovation, Grabber continues to simplify the way you work by providing the best, most technologically advanced products available today.



**Drywall Screws**  
**Metal Framing Screws**  
**Concrete Anchors**  
**Pneumatic Nails**

## Fasten it

Grabber has a full line of fasteners for just about any application. From drywall screws to heavy gauge framing screws Grabber has what you need. Grabber invented the drywall screw and changed an entire industry. For the past 40 years Grabber has been the name you can trust for professional grade fasteners.



**SuperDrive**  
**Screw Guns**  
**Chop Saws**  
**Lasers**

## Drive it

Grabber's SuperDrive tool is designed to make driving screws faster and more accurate. Along with SuperDrive, Grabber offers many other tools that make your work easier including chop saws, routers, lasers and more.



**Sub-floor Adhesives**  
**Drywall Adhesives**  
**Acoustical Sealants**  
**Fire Stopping Caulks**

## Caulk it

Grabber offers a complete line of caulks including sound control sealants, sub-floor adhesives, drywall adhesives, insulation foam and more. Grabber also offers EFC and IFC fire stopping caulks and sealants.



**NO-COAT® Stick Products**  
**NO-COAT® Flexible**  
**Corner 325 & 450**  
**AQUABEAD®**  
**Drywall Tape**  
**Finishing Tools**

## Finish it

Grabber has everything you need for finishing your drywall projects. From fiberglass mesh tape and spark perforated drywall tape to the innovative No-Coat® structural drywall system, Grabber has what you need to do the job right.

## Quality every step of the way. . . the reason the pros choose Grabber

### Grabber sweats the small stuff, and that makes all the difference

The professional's first choice for over 50 years, Grabber premium quality screws are built for performance. Sharper threads mean a better driving experience so Grabber changes thread dies more frequently. Tight recesses mean screws are less likely to cam-out and bit tips will last longer so Grabber changes recess dies more frequently. Consistent heat treating means screw heads will be less likely to pop off, so Grabber heat treats fewer screws at a time ensuring more even heat treatment. These are small things most people don't notice, but they are also small things that make the difference between average fasteners and professional grade fasteners.

Grabber is an international distributor of premium fasteners and fastening systems for wood, metal, drywall, sheathing, and acoustical applications in the commercial and residential construction markets. Grabber is home to the Deckmaster® Hidden Fastening System, the patented LOX® Drive System, and the SuperDrive Auto-Feed Fastening System. Grabber also distributes a wide range of proprietary tools and accessories, various equipment, and building materials to the construction industry.

Grabber screws and drywall nails are ICC ES (International Code Council Evaluation Service) evaluated, and engineered to meet or exceed the specifications for use, as prescribed in International Building Code® (IBC) 2015, 2012, 2009 and 2006 and International Residential Code® (IRC) 2015, 2012, 2009 and 2006. ASTM reports, approvals, shear, pullout and other technical information is available at [www.grabberman.com](http://www.grabberman.com)

Grabber screws and nails are produced in an ISO 9001 certified manufacturing environments. Grabber also supports a complete line of US manufactured construction fasteners that can meet "Buy American" and the "American Reinvestment and Recovery Act" requirements. GrabberGard® exterior grade coated fasteners are rated for use in ACQ, pressure and fire treated lumber.



Grabber Construction Products, Inc.  
5255 West 11000 North  
Highland Utah, 84003

**Visit [www.GrabberPro.com](http://www.GrabberPro.com) or  
call 800-477-8876  
to find a dealer near you.**

