


Vehicle Dimensions (mm)



Technical Data

Engine					
Emission Compliance	Euro 6	Cylinders	4		
Capacity	2298 сс	Bore/Stroke/Capacity	mm / mm / 2298 cc		
Rated Output	140KW (190HP) @ 3750RPM	Rated Torque	450NM @ 1500-2500RPM		
Fuel System	Electronically controlled direct injection with common rail, piezoelectric injection valves, turbocharger and intercooler				
Tank / Electrics					
Fuel Tank Capacity	73 litres : AdBlue 17 litres	Fuel Type	Diesel		
Battery	12V / 120 Ah	Alternator	175 ampA		
Performance Data					
Top Speed	0 MPH / 0 KMH (Calculated)				
Fuel Consumption					
Urban (mpg)	35.8	Extra Urban (mpg)	40.9		
Combined (mpg)	38.7	CO2 Emissions	192		
Powertrain					
Drive	Selectable 4x4	Transmission	Automatic 7 Speed		
Gear Ratios	0.864 / 4.886 (Top / First)	Standard Axle Ratio	tbc		
Chassis					
Front Axle	Double wishbone with coil spring and shock absorbers				
Rear Axle	Coil spring with shock absorbers				
Wheels	Wheel: , Tyres: 255/65R17 / 255/65R17 (Front / Rear)				
Anti Roll (Front)	N/A	Anti Roll (Rear)	N/A		
Steering	Rack & Pinion	Brakes	The highly effective braking system is fitted with disc brakes in the dimension 32 cm at the front and 30.8 cm at the rear. The front brake discs are internally ventilated. Numerous dynamic handling control systems are able to improve safety and ride comfort: Electronic Stability Program ESP, Anti-lock Braking System ABS, Acceleration Slip Regulation ASR, Brake Assist System BAS, Electronic Brake Distribution EBD, Active Brake Assist ABA. The mechanical parking brake in the centre console contributes to a simple and safe handling.		
Weight Rating (kg)					
Kerb Weight	1343 / 918 / 2261 (Front / Rear / Total)	Payload	1039		
Axle Loads	1490 / 1850 (Front / Rear)	GVW / GTW	3300 / 6130		
GTW	6130 / 4050 (Braked / Unbraked)	Cubic Capacity (m3)	2.48		

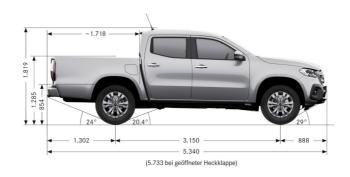

X-Class 250 d 4MATIC Power

Additional Data

Mercedes-Benz

Vans. Born to run.

Cab				
Access	Wide opening driver and front passenger doors and rear passenger doors	Security	Remote central locking; Thatcham Cat 2 engine immobiliser; Attack resistant steering lock; door locks and handles; interlocked radio	
Safety Features	Active Brake Assist; Lane Keeping Assist; Traffic Sign Assist; Reversing Camera as standard Parking Package with 360° camera (optional); Driver and front passenger; windowbags; Driver kneebag; Thorax sidebags for driver and front passenger; Windowbags; Seatbelt reminder for driver and passenger; Automatic child seat recognition	Seating & Trim	Electrically adjustable driver and front passenger seats with head restraints; three point inertia reel seat belts to both seats; black fabric, ARTICO leather or black or nut brown leather seat trim options; door mounted arm rests; passenger grab handle; cab headlining	
Refinements	Comprehensive insulation from road and engine noise; cab interior lighting; cup holder; 12v power supply; digital radio with integral Bluetooth and MP3 capability; four speakers (PURE) or eight speakers (PROGRESSIVE and POWER)	Controls	Power steering; gear lever; speedtronic variable speed limiter; central locking switch in dashboard; hazard warning lights; headlamp levelling switch; headlamp rotary switch; heater and demister with multiple outlets; horn in centre of steering wheel; key start with steering lock and transponder engine immobiliser (FBS3); left hand stalk for indicators, wipers, main beam and headlamp flasher	
Instruments	Service Intervals – 18,000 miles; coolant temperature gauge; digital clock; digital odometer with trip computer; fuel level display; rev counter; speedometer	Warning Lights	ESP/ABS/ASR/EBD warning lights; brake pad wear; coolant temperature; engine pre-heater; lamp failure; low coolant level; low brake fluid; low engine oil; low fuel; seat belt warning light; open door; parking brake; rear fog lamp; power steering malfunction	
Visibility	Electrically operated side windows in front and rear; electrically adjustable exterior mirrors; laminated windscreen; two sun visors; daylight running lights; headlights and side lights controlled by rotary switch			
Construction and Finish				
Stowage	Lockable glove box; stowage space underneath the rear bench	Body Protection	Cataphoretically dip-primed ladder frame; for increased corrosion protection wax is applied to the undercarriage.	
Service Access	Internally released hinged bonnet with support struts for access to – air filter with condition indicator; clutch/brake fluid; engine coolant; engine oil dipstick/filler cap; power steering reservoir; windscreen washer reservoir	Bumpers	Moulded in damage-resistant, impact-absorbing plastic	
Spare Wheel	Spare wheel mounted underneath rear of vehicle. Jack and tools included			
Cargo Area				
Rear Access	Lockable tailgate with optional 180° opening	Interior	LED lighting in load bed	
Load Restraint	Load securing rail system to the front and sides of loading tray as standard on Progressive and Power			
Warranty				
3-year/Unlimited miles vehicle warranty * 12-year anti-perforation warranty * Up to 30-year roadside assistance				

Terms & Conditions

Please refer to the current editions of the Mercedes-Benz Recommended List Price documents for availability and prices of models and optional equipment. The rights are reserved to alter specification or equipment without notice. All specifications refer to vehicles sourced in the UK from Mercedes-Benz UK Ltd or their appointed Mercedes-Benz Retail Partners. All weights and dimensions quoted are subject to normal manufacturing tolerances of +/- 5%. Stated weight figures in accordance with Directive97/27/EC in the applicable version at the time of going to press. Stated weight figures include driver @ 75kg, spare wheel where filted as standard, fuel tank 90% full and AdBlue tank 90% full where applicable. Fuel Consumption figures shown were obtained in accordance with the prescribed measuring process Directive (EC) 715/2007 in the currently applicable version. The figures are not based on an individual vehicle do not constitute part of the product offer; they are provided solely for the purposes of comparison between different vehicle models. The figures depend on the kerb weight of the vehicle (incl. driver, 75 kg), the rear axle ratio and the transmission variant.