


PKGO 2 PIECE FIXTURE INSTALLATION

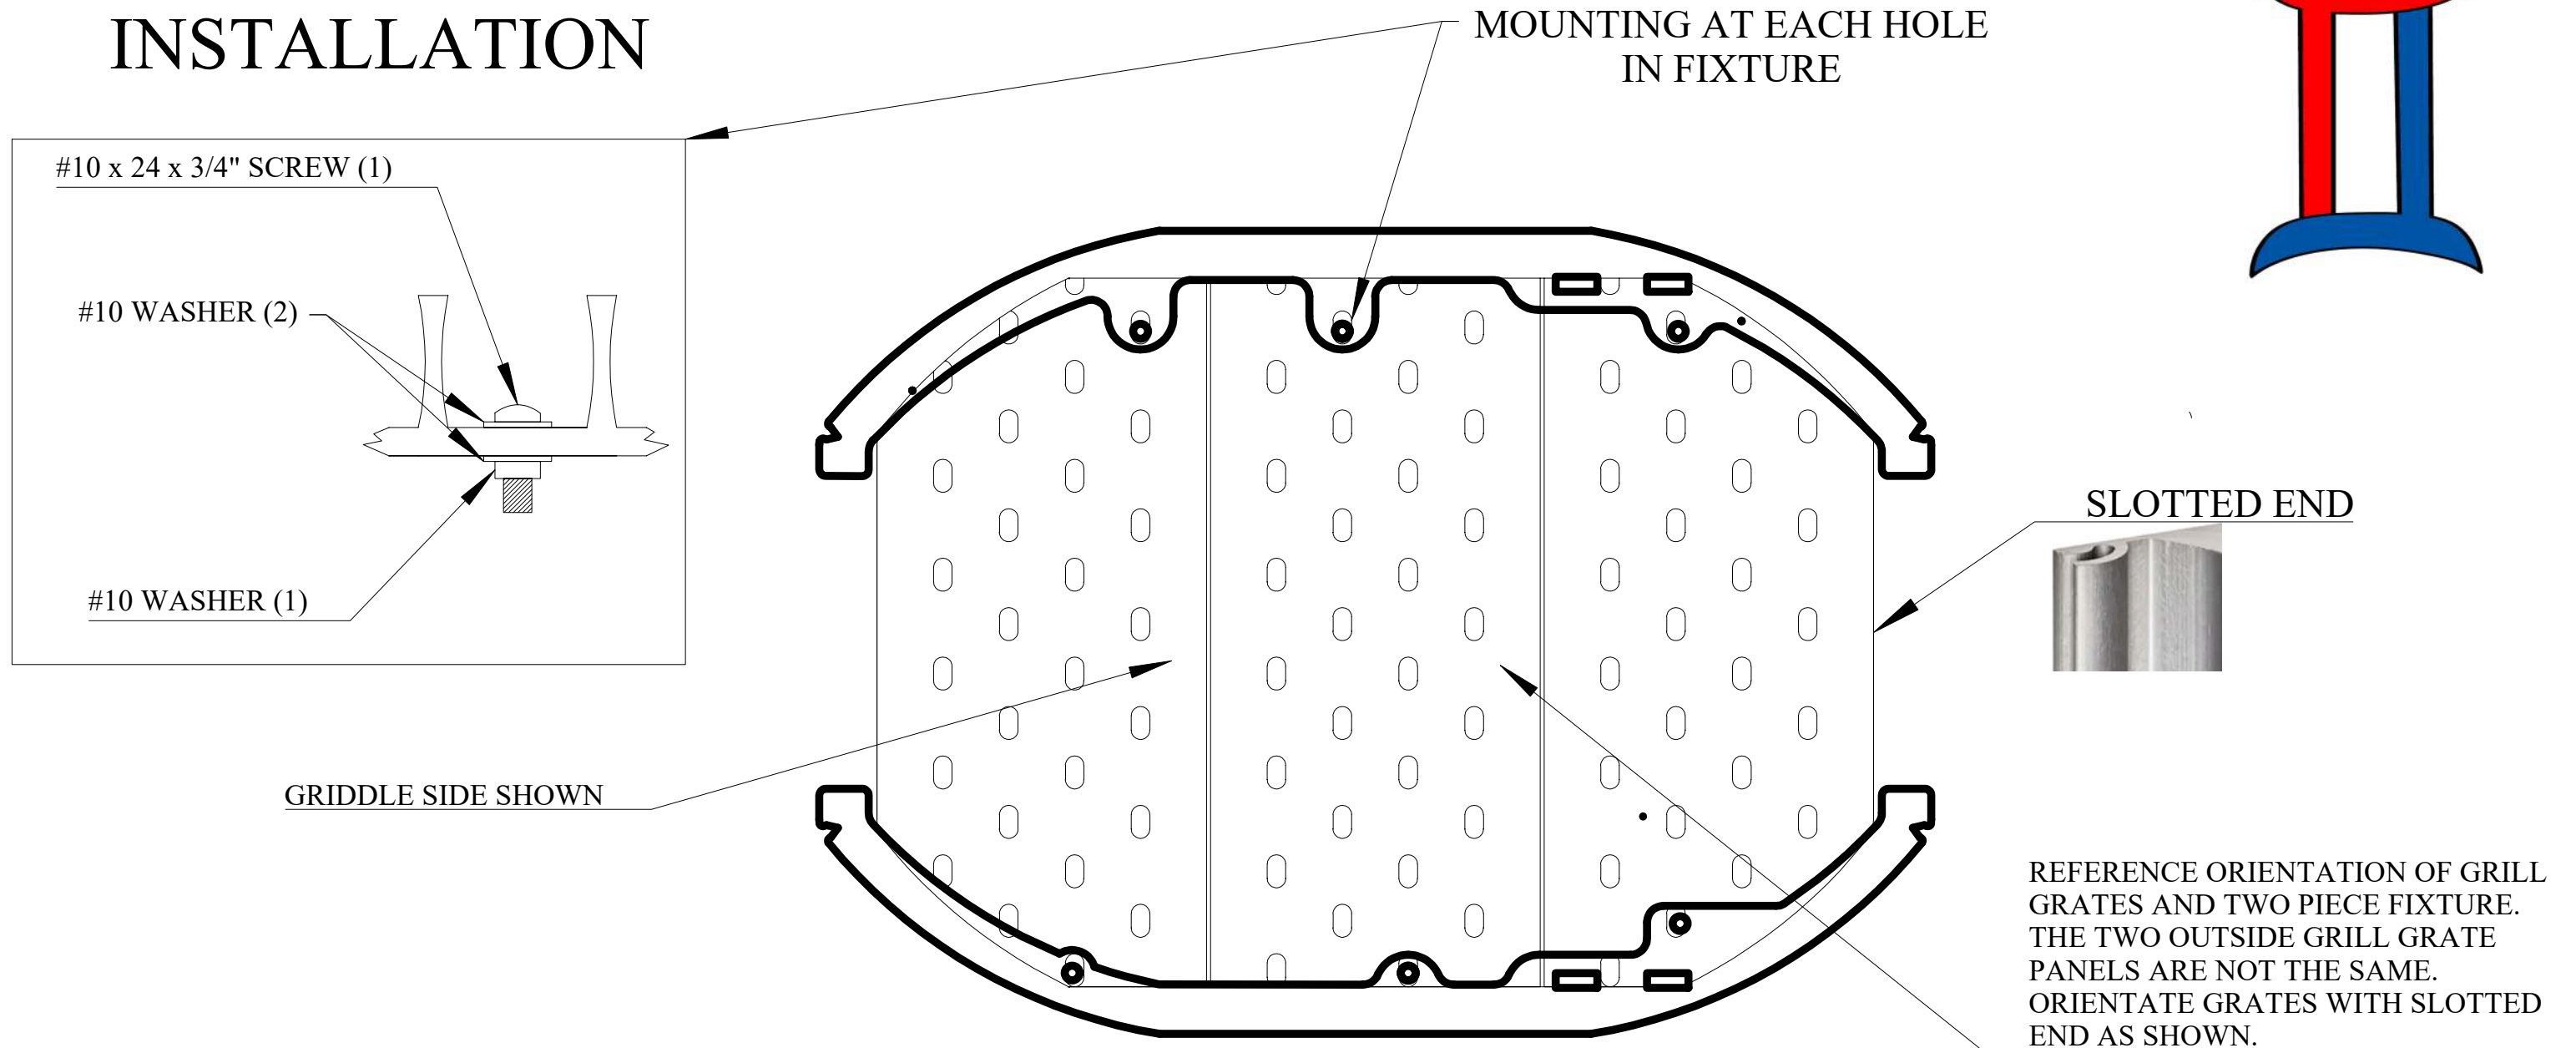

CONNECT GRILL GRATES AND SET ON A FLAT SURFACE. LOOSELY ASSEMBLE GRATES AND THE TWO FIXTURE PIECES WITH THE INCLUDED HARDWARE. SET ASSEMBLED PARTS INTO THE GRILL (GRATES UP), PUSH OUT THE FIXTURE PIECES TO SNUGGLY SET IN THE GRILL. TIGHTEN SCREWS WHILE THE ASSEMBLY IS IN THE GRILL. CAREFULLY REMOVE THE ASSEMBLY AND TIGHTEN ALL SCREWS. IT MAY BE NECESSARY TO REPEAT UNTIL DESIRED FIT IS OBTAINED.

IF YOU HAVE TROUBLE TIGHTENING THE SCREWS WHILE THE ASSEMBLY IS IN GRILL, REMOVE ONE OUTSIDE GRILL GRATE PANEL TO ALLOW YOUR HAND TO REACH IN AND GET TO THE BACK OF THE NUTS. AFTER THE TWO GRATES ARE TIGHTENED DOWN YOU CAN SLIDE THE 3RD GRATE ONTO THE FIXTURE AND ATTACH.

Gemini Grill Fixtures
www.geminibbq.com