




interPro bring your projector to life

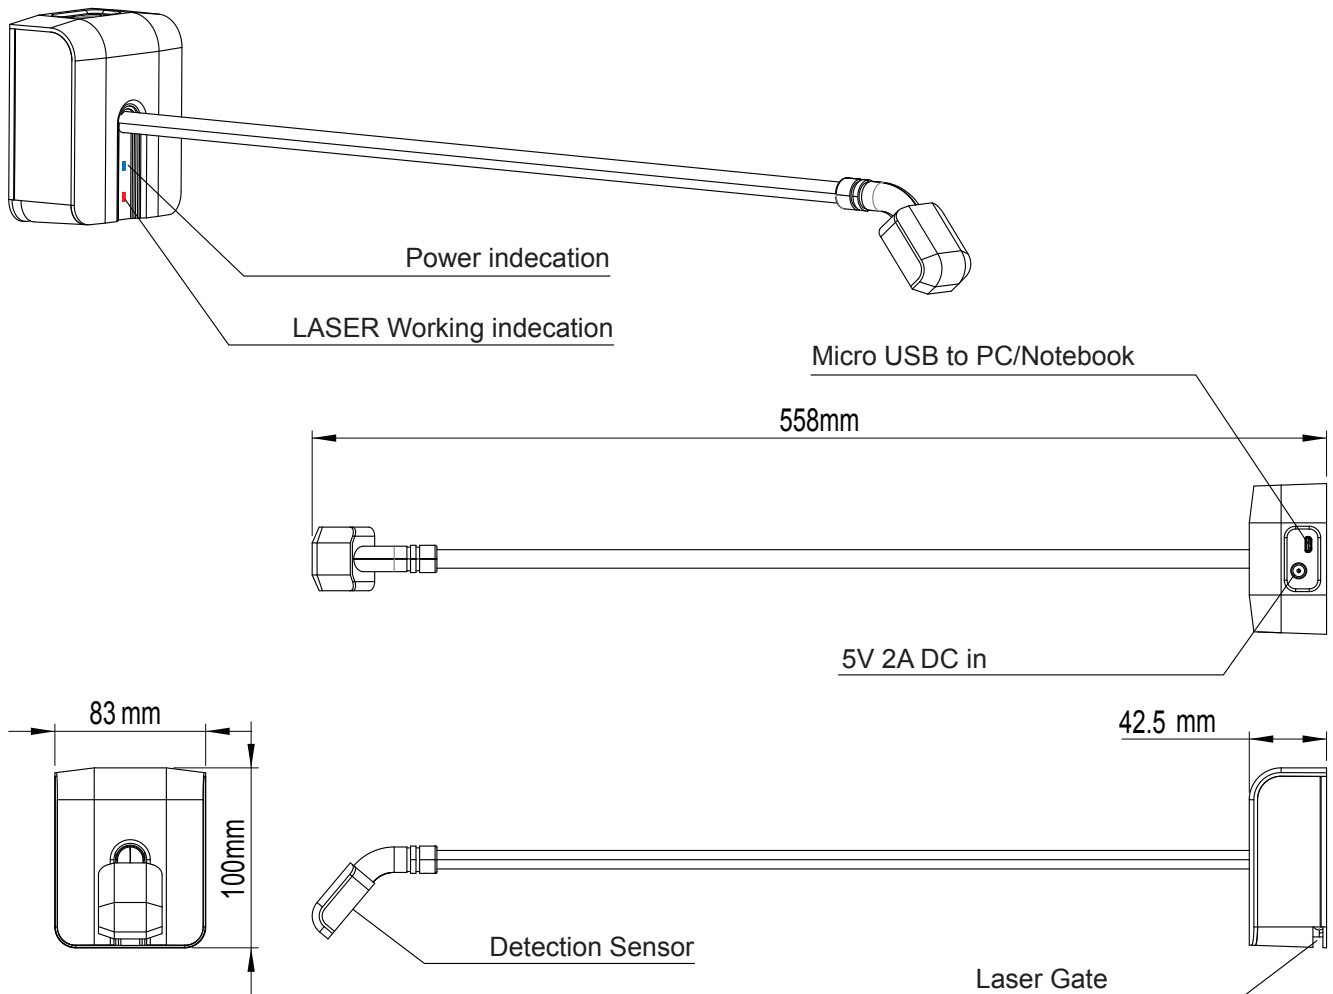


Product Specification	
Screen Size	60" - 90"
Throw Ratio	>0.6
Software	Go Touch - Touch Painter
System	Windows 7 / 8 / 10
Operation Mode	Finger / Light Pen
Features	Workable on any flat surface Compatible to screen size up to 90 inches
Application	Presentation / Games / Interactive teaching program


Sensor Operating Conditions			
Parameter	Min	Max	Unit
Operating temperature	-20	80	°C
Storage temperature	-20	80	°C
Operating humidity	10	90	%RH
Storage humidity	10	90	%RH

Sensor DC Characteristics				
Parameter	Min	Typ.	Max	Unit
Voltage	4.5	5	5.5	V
Current		350	450	mA


Laser Specification						
PARAMETER	SYMBOL	MIN	TYPICAL	MAX	UNIT	REMARK
Peak Power (808nm)	P _o	8.0	—	11.0	mW	
OPERATING CURRENT	I _{op}	730	—	960	mA	CW
OPERATING VOLTAGE	V _{op}	5.0	—	12	V	
Frequency		50			Hz	
Duty		11			%	
OPERATING TEMP. RANGE	Top	-5.0	+25	+45	°C	
STORAGE TEMP. RANGE	T _{stg}	-20	+25	+70	°C	
Before And After Adjustment	BA	—	±2	—	°	
Lateral Adjustment	LA	—	±0.5	—	°	

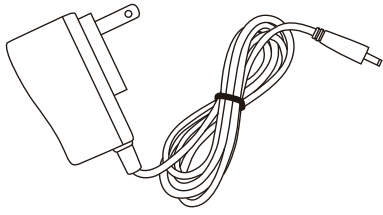

5V 2A DC Adapter

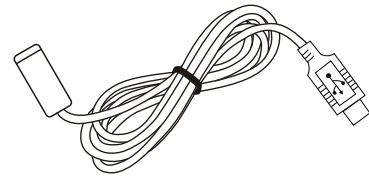


10m USB 2.0 Active Extension Cable

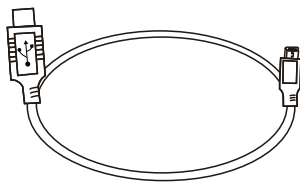


1m Mini USB to USB Cable



Positioning Assistance Card




1m Mini USB to USB Cable



Light pen



Plastic extension pipe



Cable clip



Installing software USB drives



QuickStart Guide book