

perkEpave

Play Safe

playground safety surface that lasts

Traditional EPDM safety surface

The surface layer is only 1/2" thick which cracks and peels away from the base.

The system is only semi-permeable and can contribute to stormwater runoff.


The base layer must be held together with binder which adds to the cost of material and the time required for the installation.



Traditional EPDM safety surface peeling away from the base layer

perkEpave Play Safe Is the cost effective solution

Play Safe over Loose Rubber Mulch

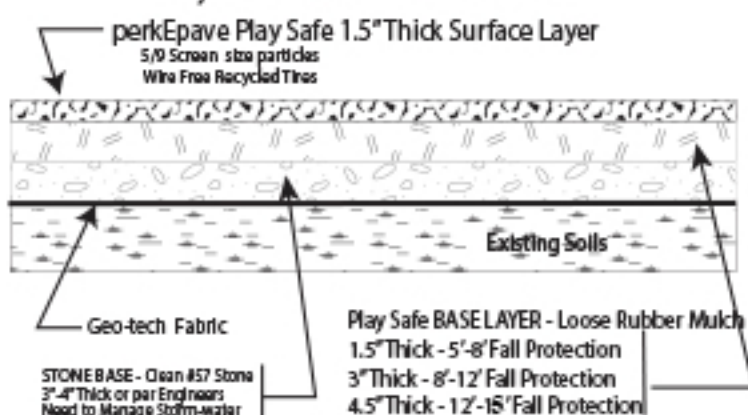

Play Safe 1.5" thick surface layer is structurally independent of the base, does not crack and peel.

Extremely permeability

The base does not need to be held together with costly binder.

Tested and Proven
ASTM F1292 - Critical Fall Height
ASTM D207 - ADA/Slip Resistant
ASTM E303 - Friction testing
ASTM D2859 - Fire Resistant
ASTM - C1701 - Permeability
All test documents available at
<https://perkEpave.com/documents>



The following links will provide additional information about perkEpave Playsafe

Play Safe
Spec & Detail

Contact Us
Samples & Pricing

perkEpave
Additional Products

perkEpave
Color Options

ASTM test report
8 ft critical fall

ASTM test report
12 ft critical fall

ASTM test report
15 ft critical fall

Request samples
and Pricing

PA COSTARS
Contract

NY DOT
Specification

perkEpave
Completed Projects

perkEpave
Trained Installers

perkEpave[®]

Additional Applications

Trails, Paths, Walkways

Tree damaged Sidewalks

Residential Driveways

Tree Surrounds

Advantages

Extremely permeable

*Non cracking through
freeze thaw*

*Comfortable flexible
walking and running
surface*

*Slip resistant and ADA
compliant.*



Superior quality
Customer service
Competitive pricing

(215) 316-6383

tcarroll@perkEpave.com

perkEpave.com