


Parameters

Performance	
HDMI Version	HDMI 2.1
Data Rate	48Gbps
Resolution	8K@60Hz, 4K@120Hz, backwards compatible
Interface	
Source/Display	HDMI Type A to Type A male
Housing material	Zin alloy
Cable	
Structure	4*fiber+7*copper core
Fiber	50/125um multimode fiber
Copper Core	30AWG*2+28AWG*3+24AWG*2
Length available	1/5/10/15/30/50/100meter
Jacket	PVC
Color	Black
Mechanical Condition	
cable diameter	4.8mm±0.1mm
Bend radius(dynamic condition) mm	20D
Bend radius(static condition) mm	10D
Tensile Strength(short term) (N)	300
Tensile Strength(long term) (N)	150
Crush Resistance(short term)(N/100mm)	600
Crush Resistance(long term)(N/100mm)	300
Environment	
Working Temperature	0℃~+70℃
Storage Temperature	-20℃~+80℃
Power	
Voltage	+5V
Power Consumption	≤250mW
Packaging	
1-30meter	Kraft paper box
Lengths over 30meter	Roll
More packaging list	dust cover、net cover、cable tie, etc.

Cable Dimension

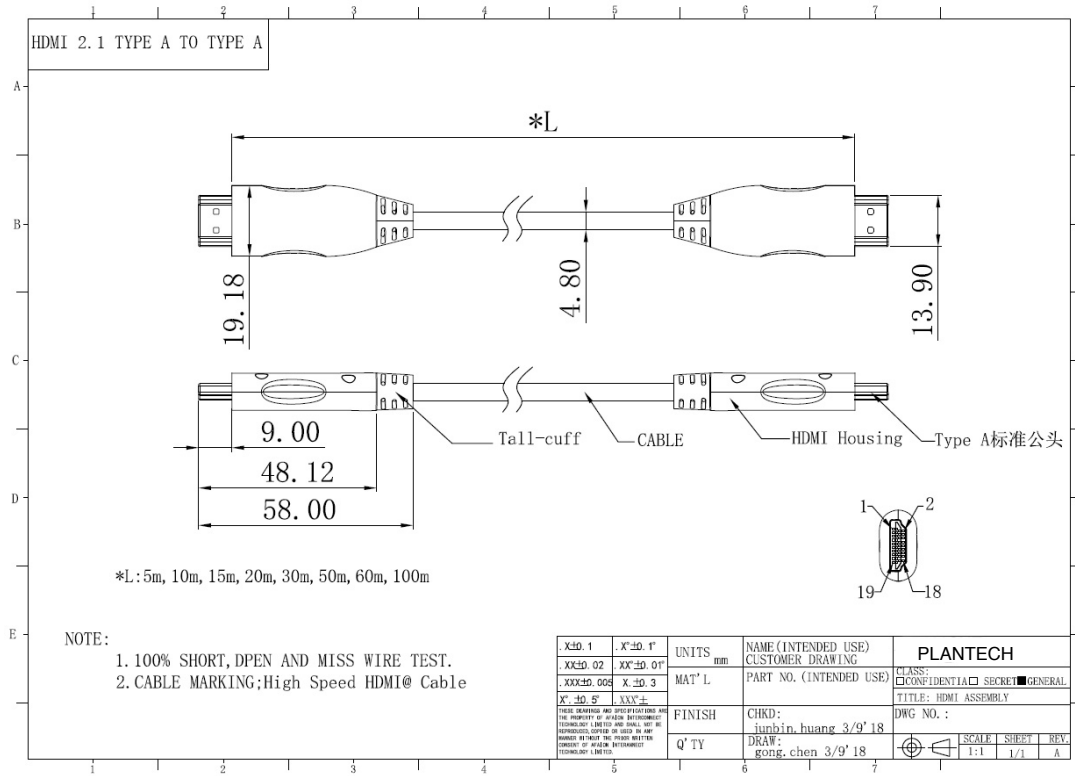

Ordering Information

Part No.	Length (m)	Specification	Packaging
RFH2512NM**	1-30m	HDMI Type A to Type A AOC, 48Gbps 8K@60Hz	Box
RFH2522NM**	31-100m	HDMI Type A to Type A AOC, 48Gbps 8K@60Hz	Roll

*1-100 meter optional

*Natural paper box packing default