

STEPRISING




***ALL-STEEL
RADIAL TYRE***

STEPRISING

PRODUCT POSITIONING

产品定位

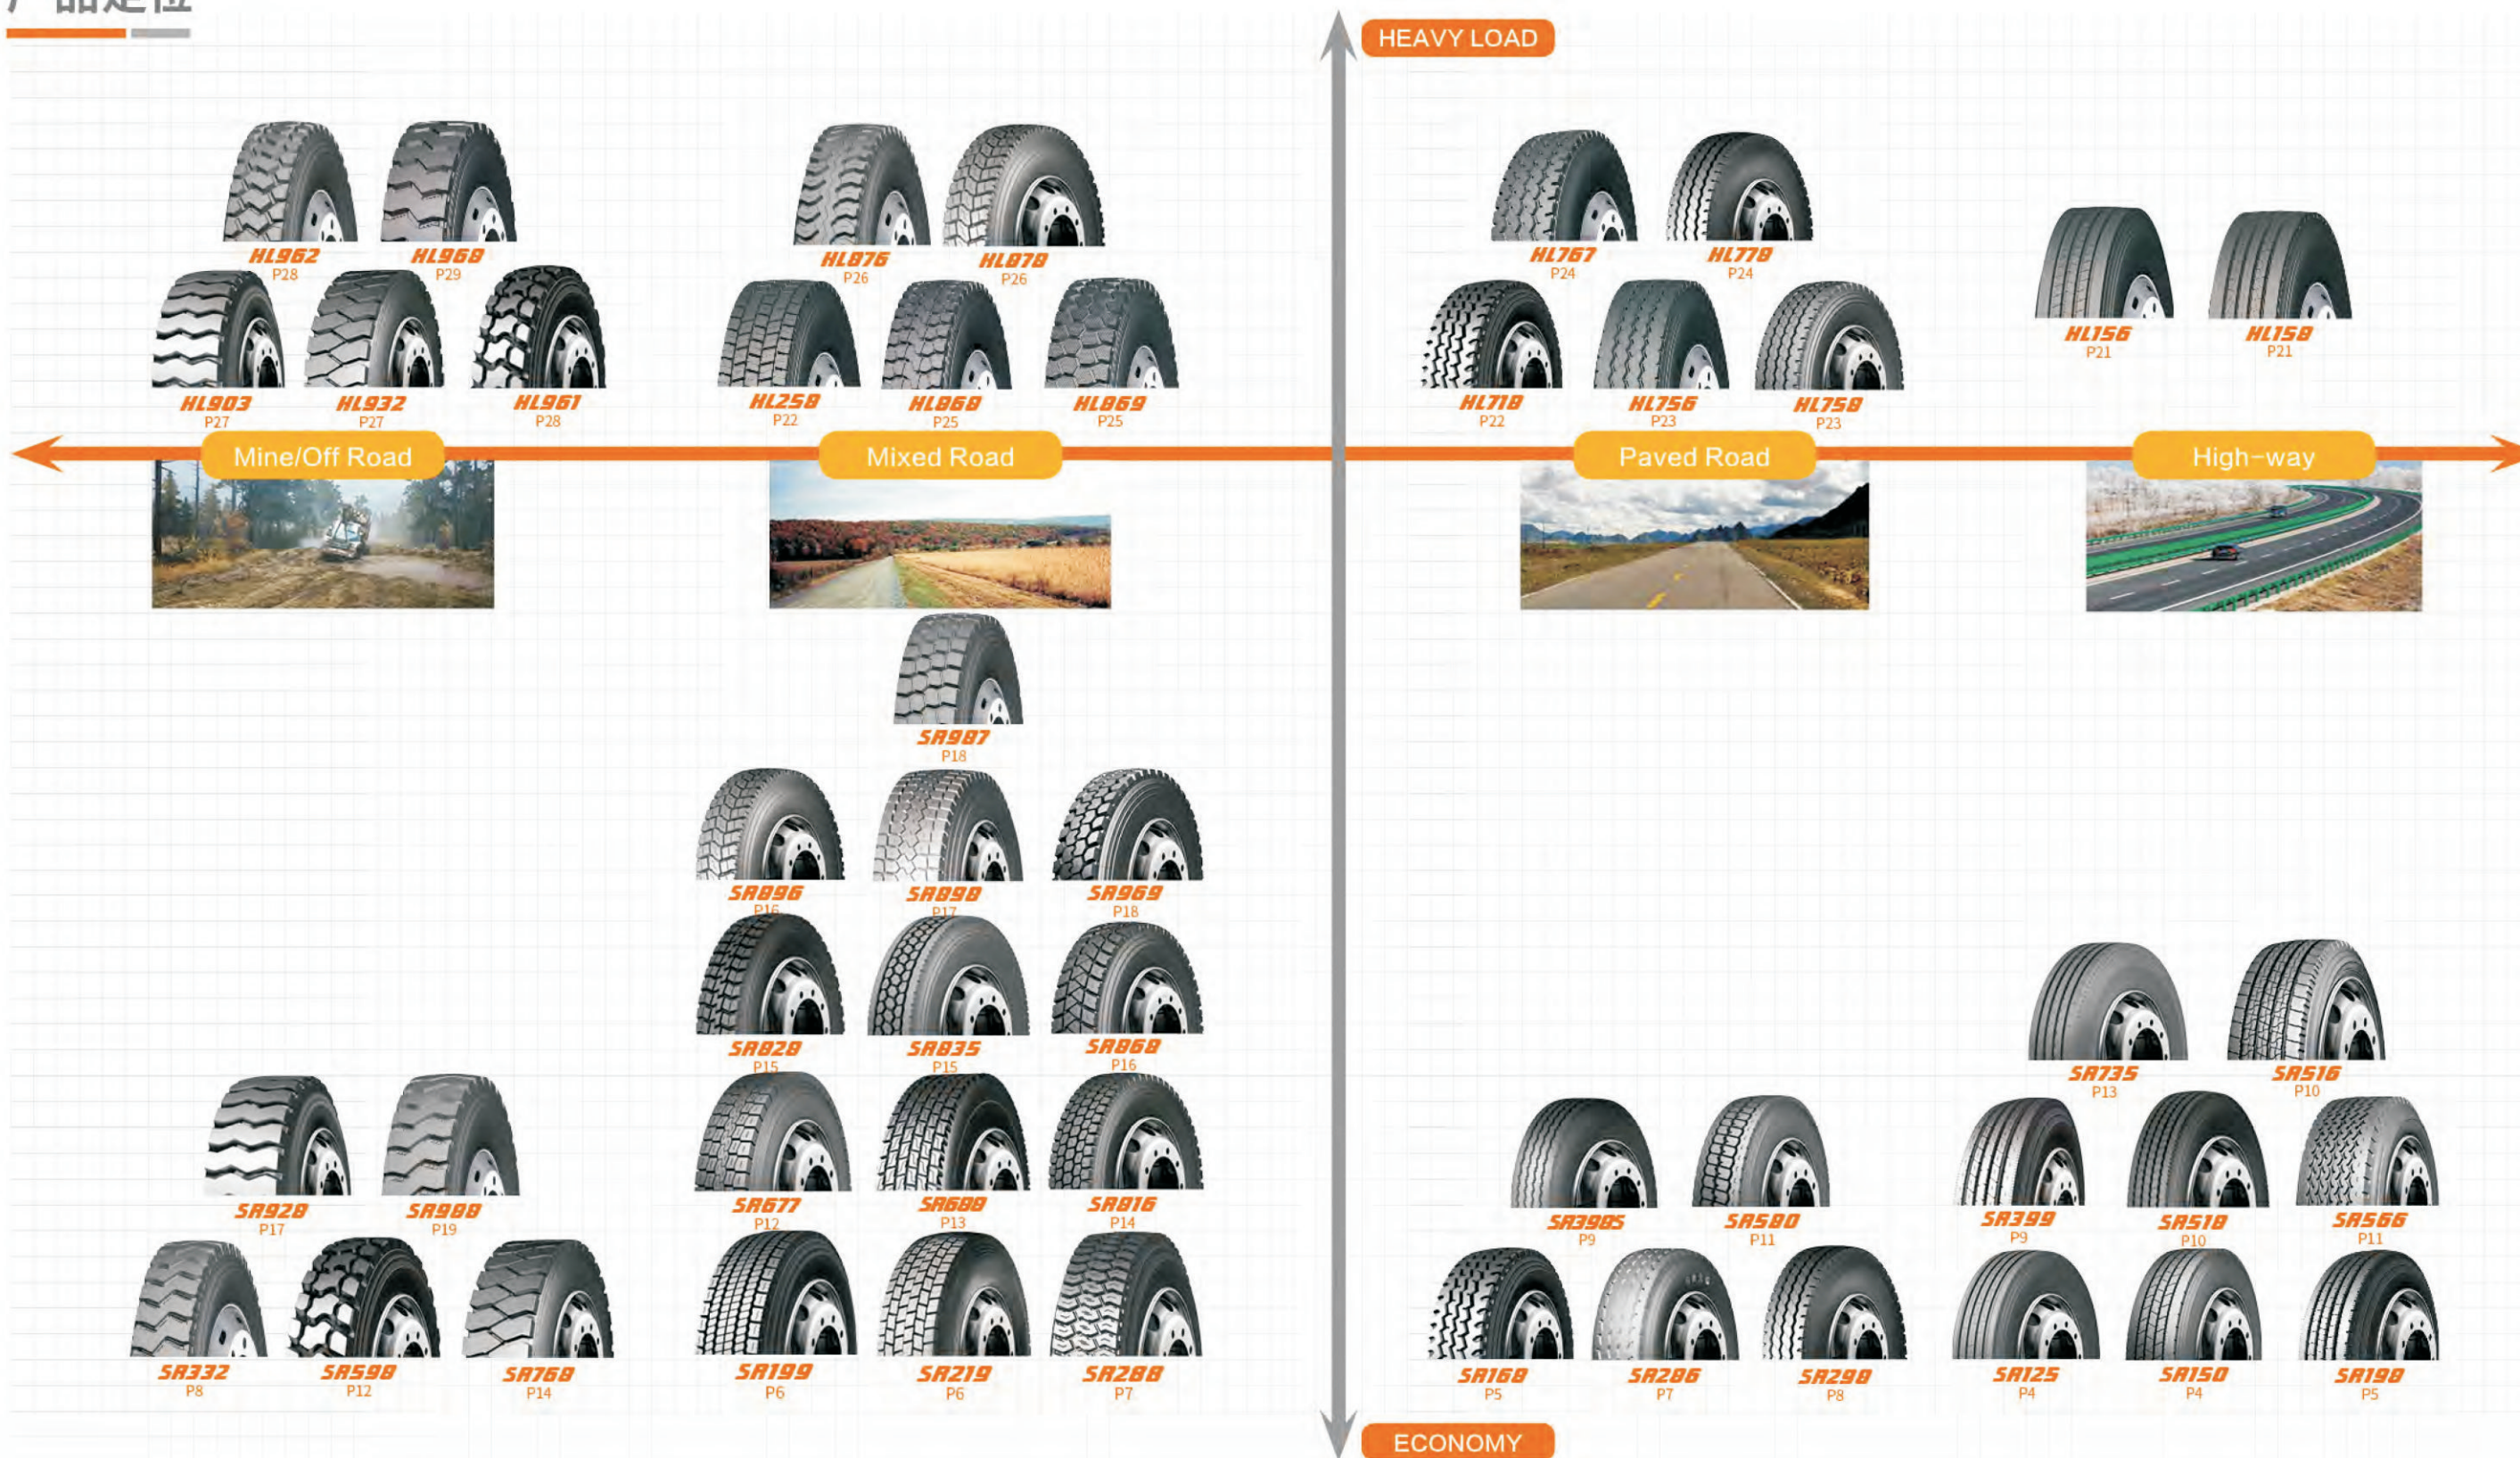



SmartWay™
SR125
ALL-STEEL RADIAL TYRE



Best
Available

- 1 High speed, heavy load, lateral spreads, good wet grip, low rolling resistance
- 2 Suitable for trailer wheels

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
11R22.5	H/16	148/145M	8.25	10.3	1054	279	3150	2900	830	830	TL
11R24.5	H/16	149/146M	8.25	10.3	1104	279	3250	3000	830	830	TL
295/75R22.5	H/16	146/143M	9.00	10.3	1014	298	3000	2725	830	830	TL



SR150
ALL-STEEL RADIAL TYRE



Best
Available

- 1 Mixed highway and freeway application for long distance and national transportation service
- 2 Special tread compound and design provide low heat build-up
- 3 Wide and closed shoulder design provides strong shoulder and excellent wave-wear resistance
- 4 Deep pattern and strong carcass provide long serve life

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
295/80R22.5	J/18	152/149M	9.00	16.0	1044	298	3550	3250	900	900	TL



SR168
ALL-STEEL RADIAL TYRE



Best
Available

- 1 Special tread compound and design enable low heat build-up, excellent puncture and cut resistance and minimized gasoline consumption
- 2 Super steel belt carcass construction enhances casing strength and maximized tyre load capacity
- 3 Four ribs with transverse deep grooves optimize speed and traction performance, provides excellent performance on wet road surface
- 4 Suitable for light truck, truck, heavy duty truck and bus on general roads and good roads

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
7.00R16	G/14	118/114L	5.50F	12.0	775	200	1320	1180	770	770	TT
7.50R16LT	G/14	122/118L	6.00G	11.0	805	215	1500	1320	770	770	TT
8.25R16LT	H/16	128/124L	6.50H	12.0	855	235	1800	1600	770	770	TT
8.25R20	H/16	139/137L	6.5	14.0	974	236	2430	2300	930	930	TT
9.00R20	H/16	144/142K	7.0	15.5	1030	259	2800	2650	900	900	TT
10.00R20	J/18	149/146K	7.5	16.0	1054	278	3250	3000	930	930	TT
11.00R20	J/18	152/149K	8.0	16.5	1085	293	3550	3250	930	930	TT
12.00R20	L/20	156/153K	8.5	17.0	1125	315	4000	3650	900	900	TT
12.00R24	L/20	160/157K	8.5	14.0	1226	315	4500	4125	900	900	TT
11R22.5	H/16	148/145M	8.25	16.0	1054	279	3150	2900	830	830	TL
11R24.5	H/16	149/146M	8.25	16.0	1104	279	3250	3000	830	830	TL
12R22.5	J/18	152/149L	9.00	16.5	1085	300	3550	3250	930	930	TL
13R22.5	J/18	154/151L	9.75	16.5	1124	320	3750	3450	830	830	TL
315/80R22.5	L/20	156/150L	9.00	15.0	1076	312	4000	3350	850	850	TL



SR198
ALL-STEEL RADIAL TYRE



Best
Available

- 1 For mixed highway and freeway, long distance and national transportation service
- 2 Unique tread pattern design minimizes side sliding on wet road surface
- 3 Wide and flat tread area offers smooth wear
- 4 Wear-resistance compound design offers long serve life

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
9.5R17.5	J/18	143/141M	6.75	13.5	842	240	2725	2575	875	875	TL
11R22.5	H/16	148/145M	8.25	15.0	1054	279	3150	2900	830	830	TL
12R22.5	J/18	152/149M	9.00	15.0	1085	300	3550	3250	930	930	TL
215/75R17.5	H/16	135/133J	6.00	13.0	767	211	2180	2060	850	850	TL
255/70R22.5	H/16	140/137M	7.50	14.5	930	255	2500	2300	830	830	TL
275/70R22.5	J/18	148/145M	8.25	15.0	958	276	3150	2900	900	900	TL
295/75R22.5	H/16	146/143M	9.00	15.0	1014	298	3000	2725	830	830	TL
295/80R22.5	J/18	152/149M	9.00	15.0	1044	298	3550	3250	900	900	TL
315/80R22.5	L/20	156/150M	9.00	15.0	1076	312	4000	3350	850	850	TL



SR199

ALL-STEEL RADIAL TYRE



Best
Available

- 1 Designed to provide exceptional performance and life in linehaul drive applications
- 2 Small block design helps enhance handling and traction on all season highway conditions
- 3 Cool running compound to promote longer life, great CPK performer

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
11R22.5	H/16	148/145M	8.25	21.0	1054	279	3150	2900	830	830	TL



SR219

ALL-STEEL RADIAL TYRE



Best
Available

- 1 Designed to provide exceptional performance and life in linehaul drive applications
- 2 Small block design helps enhance handling and traction on all season highway conditions
- 3 Tread bars maintain an even footprint and help prevent tyre squirm
- 4 Cool running compound to promote longer life, great CPK performer

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
265/70R19.5	J/18	143/141M	7.50	17.0	867	262	2725	2575	850	850	TL
11R22.5	H/16	148/145M	8.25	21.0	1054	279	3150	2900	830	830	TL
12R22.5	J/18	152/149L	9.00	22.0	1085	300	3550	3250	930	930	TL
295/80R22.5	J/18	152/149M	9.00	20.0	1044	298	3550	3250	900	900	TL



SR286

ALL-STEEL RADIAL TYRE



Best
Available

- 1 Apply to paved and high speed roads, long distance vehicles
- 2 High speed stability, strong resistance, super wear resistance and good heat resistance

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
385/65R22.5	L/20	160K	11.75	17.0	1072	389	4500	-	900	-	TL
425/65R22.5	L/20	164J	12.25	18.0	1124	422	5000	-	830	-	TL



SR288

ALL-STEEL RADIAL TYRE



Best
Available

- 1 Mixed open pattern design offers excellent traction and brake performance
- 2 Wide tread improves tire wear resistance
- 3 Suitable for driving wheels

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
12.00R24	L/20	160/157K	8.5	17.0	1226	315	4500	4125	900	900	TT



SR298

ALL-STEEL RADIAL TYRE



Best
Available

- 1 Special tread compound and design enable low heat build-up, excellent puncture and cut resistance and minimized gasoline consumption
- 2 Super steel belt carcass construction enhances casing strength and maximized tyre load capacity
- 3 Four ribs with transverse deep grooves optimize speed and traction performance, provides excellent performance on wet road surface

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
10.00R20	J/18	149/146L	7.5	16.0	1054	278	3250	3000	930	930	TT
11.00R20	J/18	152/149L	8.0	16.5	1085	293	3550	3250	930	930	TT
12.00R20	L/20	156/153L	8.5	17.0	1125	315	4000	3650	900	900	TT
12.00R24	L/20	160/157K	8.5	14.0	1226	315	4500	4125	900	900	TT



SR332

ALL-STEEL RADIAL TYRE



Best
Available

- 1 Applicable for driving wheels, For short distance with low speed on mining and off roads
- 2 Pattern design offers excellent pulling force
- 3 Special tread compound offers excellent cut resistance
- 4 Reinforced bead design provides excellent load capacity

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
8.25R16LT	H/16	128/124F	6.50H	18.0	855	235	1800	1600	770	770	TT
8.25R20	H/16	139/137J	6.5	19.0	974	236	2430	2300	930	930	TT



SR398S

ALL-STEEL RADIAL TYRE



Best
Available

- 1 Four zigzag main grooves provide excellent directional driving performance
- 2 High speed stability, strong resistance, super wear resistance and good heat resistance

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
11R22.5	H/16	148/145M	8.25	17.0	1054	279	3150	2900	830	830	TL



SR399

ALL-STEEL RADIAL TYRE



Best
Available

- 1 For mixed highway and freeway, long distance and national transportation service
- 2 Unique tread pattern design minimizes side sliding on wet road surface
- 3 Wide and flat tread area offers smooth wear
- 4 Wear-resistance compound design offers long serve life

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
315/80R22.5	L/20	156/150M	9.00	15.0	1076	312	4000	3350	850	850	TL



SR516

ALL-STEEL RADIAL TYRE



Best
Available

- 1 Four straight main grooves provide excellent directional driving performance
- 2 High speed stability, strong resistance, super wear resistance and good heat resistance
- 3 Suitable for front wheel or all position

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
9.5R17.5	J/18	143/141M	6.75	13.5	842	240	2725	2575	875	875	TL
215/75R17.5	H/16	135/133J	6.00	12.5	767	211	2180	2060	850	850	TL
235/75R17.5	H/16	143/141J	6.75	12.5	803	233	2725	2575	850	850	TL
265/70R19.5	J/18	143/141M	7.50	14.5	867	262	2725	2575	850	850	TL
255/70R22.5	H/16	140/137M	7.50	14.5	930	255	2500	2300	830	830	TL
275/70R22.5	J/18	148/145M	8.25	15.0	958	276	3150	2900	900	900	TL



SR518

ALL-STEEL RADIAL TYRE



Best
Available

- 1 For mixed highway and freeway, long distance and national transportation service
- 2 Unique tread pattern design minimizes side sliding on wet road surface
- 3 Wide and flat tread area offers smooth wear
- 4 Wear-resistance compound design offers long serve life

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
215/75R17.5	H/16	135/133J	6.00	12.5	767	211	2180	2060	850	850	TL
9.5R17.5	J/18	143/141M	6.75	13.5	842	240	2725	2575	875	875	TL



SR566

ALL-STEEL RADIAL TYRE



Best
Available

- 1 Application for all position on mixed highway and freeway
- 2 Special tread compound provides low heating-up, smooth wear&cut resistance, and low rolling resistance
- 3 Suitable for heavy duty truck and bus

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
385/65R22.5	L/20	160K	11.75	16.5	1072	389	4500	-	900	-	TL



SR580

ALL-STEEL RADIAL TYRE



Best
Available

- 1 Special tread design enable low heat build-up, excellent puncture and cut resistance and minimized gasoline consumption
- 2 Four ribs with transverse deep grooves optimize speed and traction performance, provides excellent performance on wet road surface
- 3 closed shoulder provides excellent performance on resisting uneven wear

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
12.00R24	L/20	160/157K	8.5	14.0	1226	315	4500	4125	900	900	TT



SR598

ALL-STEEL RADIAL TYRE



Best
Available

- 1 Massive lugs provide the tire with excellent traction and driving performance
- 2 Deeper tread offers extended mileage
- 3 Open shoulder structure provides good water dispersion as well as side slip resistance

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
11R22.5	H/16	146/143J	8.25	22.0	1054	279	3000	2725	830	830	TL
10.00R20	J/18	149/146F	7.5	19.0	1054	278	3250	3000	930	930	TT
11.00R20	J/18	152/149F	8.0	19.5	1085	293	3550	3250	930	930	TT
12.00R20	L/20	156/153F	8.5	20.5	1125	315	4000	3650	900	900	TT



SR677

ALL-STEEL RADIAL TYRE



Best
Available

- 1 Unique mixed pattern design reduces heat generation and ensures extended mileage

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
11R22.5	H/16	148/145M	8.25	22.0	1054	279	3150	2900	830	830	TL



SR688

ALL-STEEL RADIAL TYRE



Best
Available

- 1 Designed to provide exceptional performance and life in linehaul drive applications
- 2 Small block design helps enhance handling and traction on all season highway conditions
- 3 Tread bars maintain an even footprint and help prevent tyre squirm
- 4 Cool running compound to promote longer life, great CPK performer

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
315/80R22.5	L/20	156/150L	9.00	20.0	1076	312	4000	3350	850	850	TL



SmartWay
SR735

ALL-STEEL RADIAL TYRE



Best
Available

- 1 For mixed highway and freeway, long distance and national transportation service
- 2 Unique tread pattern design minimizes side sliding on wet road surface
- 3 Wide and flat tread area offers smooth wear
- 4 Wear-resistance compound design offers long serve life

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
265/70R19.5	H/16	140/138M	7.50	13.5	867	262	2500	2360	775	775	TL
265/70R19.5	J/18	143/141M	7.50	13.5	867	262	2725	2575	850	850	TL
11R22.5	H/16	148/145M	8.25	15.0	1054	279	3150	2900	830	830	TL
11R24.5	H/16	149/146M	8.25	15.0	1104	279	3250	3000	830	830	TL
295/75R22.5	H/16	146/143M	9.00	15.0	1014	298	3000	2725	830	830	TL



SR768

ALL-STEEL RADIAL TYRE



Best
Available

- 1 Application for driving wheels
- 2 Suitable for short distance with low speed on mining and bad roads
- 3 Block pattern design offers good pulling force special tread compound offers excellent cut resistance
- 4 Reinforced bead area design provides excellent load capacity

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
9.00R20	H/16	144/142F	7.0	25.0	1030	259	2800	2650	900	900	TT
11.00R20	J/18	152/149F	8.0	25.0	1085	293	3550	3250	930	930	TT
12.00R20	L/20	156/153F	8.5	25.0	1125	315	4000	3650	900	900	TT



SR816

ALL-STEEL RADIAL TYRE



Best
Available

- 1 Unique mixed pattern design reduces heat generation and ensures extended mileage

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
11R22.5	H/16	148/145M	8.25	22.0	1054	279	3150	2900	830	830	TL
11R24.5	H/16	149/146M	8.25	22.0	1104	279	3250	3000	830	830	TL



SR828

ALL-STEEL RADIAL TYRE



Best
Available

- 1 Ultra drive and brake ability, tearing resistance, cutting resistance, abrasion resistance, good load capacity
- 2 Suitable for medium trucks, for driving wheels and drag wheels

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
9.5R17.5	J/18	143/141M	6.75	14.5	842	240	2725	2575	875	875	TL
215/75R17.5	H/16	135/133J	6.00	14.5	767	211	2180	2060	850	850	TL
235/75R17.5	H/16	143/141J	6.75	14.0	803	233	2725	2575	850	850	TL
275/70R22.5	J/18	148/145L	8.25	21.0	958	276	3150	2900	900	900	TL
11R22.5	H/16	148/145M	8.25	22.0	1054	279	3150	2900	830	830	TL



SR835

ALL-STEEL RADIAL TYRE



Best
Available

- 1 Mixed highway and freeway application, for long distance and national transportation service
- 2 Special tread compound and design provide low heat build-up, low rolling resistance and minimized gasoline consumption
- 3 Special tread design offers super grip on wet road surface and minimized driving noise

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
11R22.5	H/16	148/145M	8.25	22.0	1054	279	3150	2900	830	830	TL
11R24.5	H/16	149/146M	8.25	22.0	1104	279	3250	3000	830	830	TL
295/75R22.5	H/16	146/143M	9.00	22.0	1014	298	3000	2725	830	830	TL



SR868

ALL-STEEL RADIAL TYRE



Best
Available

- 1 Applicable for driving wheels, Suitable for short distance with low speed on mining and bad roads
- 2 Directional mixed pattern provides excellent traction
- 3 Open shoulder structure provides good ability of water dispersion as well as anti-hydroplaning
- 4 Streamline pattern effectively ejects stones and prevents possible damage to tire groove bottom

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
315/80R22.5	L/20	156/150K	9.00	22.0	1076	312	4000	3350	850	850	TL



SR896

ALL-STEEL RADIAL TYRE



Best
Available

- 1 Mixed open pattern design offers excellent traction and brake performance
- 2 Wide tread improves tire wear resistance
- 3 Suitable for driving wheels

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
7.00R16	G/14	118/114K	5.50F	15.0	775	200	1320	1180	770	770	TT
7.50R16LT	G/14	122/118K	6.00G	13.0	805	215	1500	1320	770	770	TT
8.25R16LT	H/16	128/124K	6.50H	14.5	855	235	1800	1600	770	770	TT
8.25R20	H/16	139/137J	6.5	17.5	974	236	2430	2300	930	930	TT
9.00R20	H/16	144/142J	7.0	18.5	1030	259	2800	2650	900	900	TT
10.00R20	J/18	149/146J	7.5	19.0	1054	278	3250	3000	930	930	TT
11.00R20	J/18	152/149J	8.0	19.5	1085	293	3550	3250	930	930	TT
12.00R20	L/20	156/153J	8.5	20.5	1125	315	4000	3650	900	900	TT
11R22.5	H/16	146/143J	8.25	21.0	1054	279	3000	2725	830	830	TL



SR898

ALL-STEEL RADIAL TYRE



Best
Available

- 1 Unique mixed pattern design reduces heat generation and ensures extended mileage

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
12R22.5	J/18	152/149L	9.00	21.5	1085	300	3550	3250	930	930	TL



SR928

ALL-STEEL RADIAL TYRE



Best
Available

- 1 Applicable for driving wheels, For short distance with low speed on mining and off roads
- 2 Pattern design offers excellent pulling force
- 3 Special tread compound offers excellent cut resistance
- 4 Reinforced bead design provides excellent load capacity

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
10.00R20	J/18	149/146F	7.5	24.0	1054	278	3250	3000	930	930	TT
11.00R20	J/18	152/149F	8.0	24.0	1085	293	3550	3250	930	930	TT
12.00R20	L/20	156/153F	8.5	24.0	1125	315	4000	3650	900	900	TT



SR969
ALL-STEEL RADIAL TYRE



Best
Available

- 1 Aggressive block design provides outstanding traction on rough roads
- 2 Suitable for all season and all position application on mud and sand terrain with some short on high-way use
- 3 Cool-running compound enhances toughness casing

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
10.00R20	J/18	149/146J	7.5	19.0	1054	278	3250	3000	930	930	TT
11.00R20	J/18	152/149J	8.0	19.5	1085	293	3550	3250	930	930	TT
12.00R20	L/20	156/153J	8.5	20.5	1125	315	4000	3650	900	900	TT



SR987
ALL-STEEL RADIAL TYRE



Best
Available

- 1 Applicable for drive axle on unpaved road
- 2 Robust tread block provides outstanding traction on sand and mud road
- 3 Special groove design with stone rejector prevent from stone penetration
- 4 Durable tyre carcass and improved tread compound help to resist chipping and chunking for longer tyre life

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
11.00R20	J/18	152/149J	8.0	19.0	1085	293	3550	3250	930	930	TT
12.00R20	L/20	156/153J	8.5	19.0	1125	315	4000	3650	900	900	TT



SR988
ALL-STEEL RADIAL TYRE



Best
Available

- 1 Applicable for driving wheels, For short distance with low speed on mining and off roads
- 2 Pattern design offers excellent pulling force
- 3 Special tread compound offers excellent cut resistance
- 4 Reinforced bead design provides excellent load capacity

Size	LR/PR	Service Index	Standard Rim	Tread Depth (mm)	O.D (mm)	Section Width (mm)	Max Load Capacity (kg)		Inflation Pressure (kpa)		Type
							Single	Dual	Single	Dual	
11.00R20	J/18	152/149F	8.0	23.0	1085	293	3550	3250	930	930	TT
12.00R20	L/20	156/153F	8.5	23.0	1125	315	4000	3650	900	900	TT



Rolling Around the World

📍 12574 Westhampton Circle
Wellington FL 33414 USA

📞 +1 305 8905386 📷 📘

✉️ salesdirector@tirenetworkusa.co 🌐 www.tirenetworkusa.co