

# Genuine Comfort Thru-Wall Air Conditioner Spec Sheet


**GENUINE COMFORT**  
DELIVERING COMFORT CONSISTENTLY




## FEATURES

- Universal Thru-Wall Size
- Fits All Wall Sleeves 24"-27"
- Digital Controls
- Remote Control Included
- UL Certified
- Slide-Out Washable & Easy-Clean Filter
- 24-Hour Programmable Timer
- Dehumidify Mode &
- Trim Piece Included
- 1 Year P & L Warranty & 5 Year Sealed System


### WALL SLEEVE DIMENSIONS

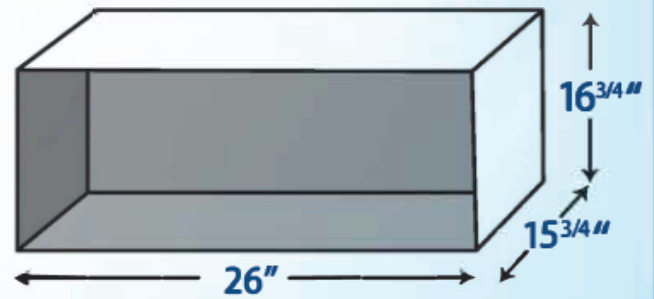

### MODEL IDENTIFICATION

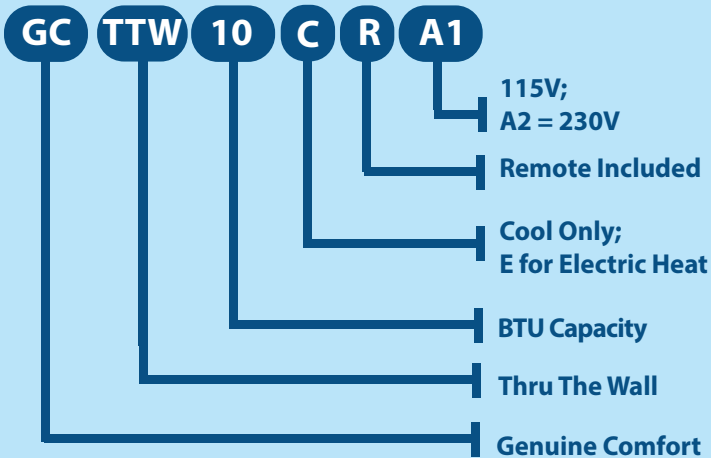

### WALL RECEPTACLES

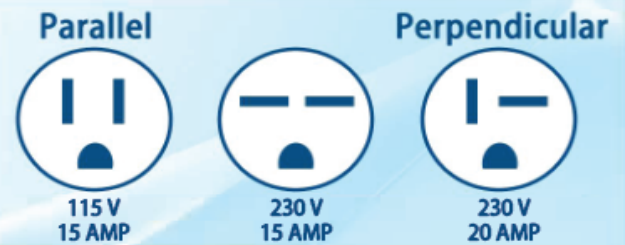

**For More Information Please Contact:**



204-201-0717



1-866-233-4022 (Toll Free)



info@genuinecomfort.com



www.genuinecomfort.com

# Genuine Comfort Thru-Wall Air Conditioner Spec Sheet

**GENUINE COMFORT**  
DELIVERING COMFORT CONSISTENTLY

GC THRU WALL AC 115v		SPECIFICATIONS		
Model #		GCTTW-10CRA1	GCTTW-12CRA1	
BTU		10,000	12,000	
Control Type		Electronic	Electronic	
Certificate		UL	UL	
Power Supply	Ph-V-Hz	115V - 60Hz	115V - 60Hz	
Cooling	RATED Capacity	Btu/h	10,000	12,000
	RATED EER	Btu/w.h,w/w	3.11	3.08
	RATED CEER	Btu/w.h,w/w	10.6	10.5
	RATED Input	W	943	1142
	RATED Current	A	8.3	10.0
Heating	RATED Capacity	Btu/h	/	/
	RATED Input(Heater)	W	/	/
	RATED Current	A	/	/
Starting Current	A	35.4	45.6	
Indoor Air Circulation (Lo/Hi)	m3/h	346 / 458	487	
Outdoor Air Circulation (Lo/Hi)	m3/h	440 / 635	595 / 715	
Indoor Noise Level Db (Lo/Hi)	dB(A)	53 / 57	55 / 60	
Outdoor Noise Level Db (Hi)	dB(A)	66	67	
Operation Temp (Indoor)	°C - °C	17 - 32	17 - 32	
Operation Temp (Outdoor)	°C - °C	18 - 43	18 - 43	
Dimensions (WxDxH)	inch	24.21 x 20.28 x 14.53	24.21 x 20.28 x 14.53	
Packing Dimensions (WxDxH)	inch	27.95 x 26.57 x 16.93	27.95 x 26.57 x 16.93	
Net / Gross Weight	lbs	68 / 80	77 / 90	
Plug Type	/	LCDI(5-15P)	LCDI(5-15P)	
Refrigerant Type	/	R410A	R410A	
Design Pressure	psi	300 / 520	300 / 520	
Loading Capacity (40HQ)	SET	306	306	

GC THRU WALL AC 230v		SPECIFICATIONS				
Model #		GCTTW-10CRA2	GCTTW-12CRA2	GCTTW-14CRA2	GCTTW-12ERA2	
BTU		10,000	12,000	14,000	12,000	
Control Type		Electronic	Electronic	Electronic	Electronic	
Certificate		UL	UL	UL	UL	
Power Supply	Ph-V-Hz	230/208V - 60Hz	230/208V - 60Hz	230/208V - 60Hz	230/208V - 60Hz	
Cooling	RATED Capacity	Btu/h	10,000	12,000	14,000	
	RATED EER	Btu/w.h,w/w	3.11	3.08	2.73/2.78	2.78
	RATED CEER	Btu/w.h,w/w	10.6	10.5	9.3	9.5
	RATED Input	W	943	1142/1114	1505/1431	1263/1232
	RATED Current	A	4.5	5.2/5.6	6.9/7.5	5.5/5.9
Heating	RATED Capacity	Btu/h	/	/	/	10600/8600
	RATED Input(Heater)	W	/	/	/	3450/2821
	RATED Current	A	/	/	/	15/13.5
Starting Current	A	19.5	21.3	37.5	16.5	
Indoor Air Circulation (Lo/Hi)	m3/h	356 / 468	400 / 472	430 / 503	409 / 487	
Outdoor Air Circulation (Lo/Hi)	m3/h	440 / 635	651 / 798	614 / 727	595 / 715	
Indoor Noise Level Db (Lo/Hi)	dB(A)	56 / 59	58 / 61	59 / 61	56 / 60	
Outdoor Noise Level Db (Hi)	dB(A)	67	67	69	68	
Operation Temp (Indoor)	°C - °C	17 - 32	17 - 32	17 - 32	17 - 32	
Operation Temp (Outdoor)	°C - °C	18 - 43	18 - 43	18 - 43	18 - 43	
Dimensions (WxDxH)	inch	24.21 x 20.28 x 14.53	24.21 x 20.28 x 14.53	24.21 x 20.28 x 14.53	24.21 x 20.28 x 14.53	
Packing Dimensions (WxDxH)	inch	27.95 x 26.57 x 16.93	27.95 x 26.57 x 16.93	27.95 x 26.57 x 16.93	27.95 x 26.57 x 16.93	
Net / Gross Weight	lbs	69 / 80	76 / 87	75 / 86	78 / 89	
Plug Type	/	LCDI(6-15P)	LCDI(6-15P)	LCDI(6-15P)	LCDI(6-20P)	
Refrigerant Type	/	R410A	R410A	R410A	R410A	
Design Pressure	psi	300 / 520	300 / 520	300 / 520	300 / 520	
Loading Capacity (40HQ)	SET	306	306	306	306	

**For More Information Please Contact:**



204-201-0717



1-866-233-4022 (Toll Free)



info@genuinecomfort.com



www.genuinecomfort.com