


# Genuine Comfort 42" Packaged Terminal Air Conditioners

**GENUINE COMFORT**  
DELIVERING COMFORT CONSISTENTLY



- 42" W x 16" H x 21" D
- ETL (Intertek) and AHRI Certified
- Energy Efficient: Meets DOE Requirements
- Dual Motors for Quiet and Efficient Operations
- Touch Pad Controls and Electronic Central Board Display
- Universal Wall Sleeve Fit
- Universal Thermostat Compatibility
- R410A Refrigerant
- Genuine Care Warranty: 1 Year Parts and Labor/6 Years Parts
- EMS Compatible


## WALL SLEEVE DIMENSIONS

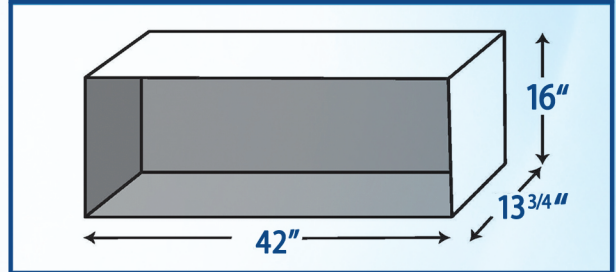

## WALL RECEPTACLES



## MODEL IDENTIFICATION

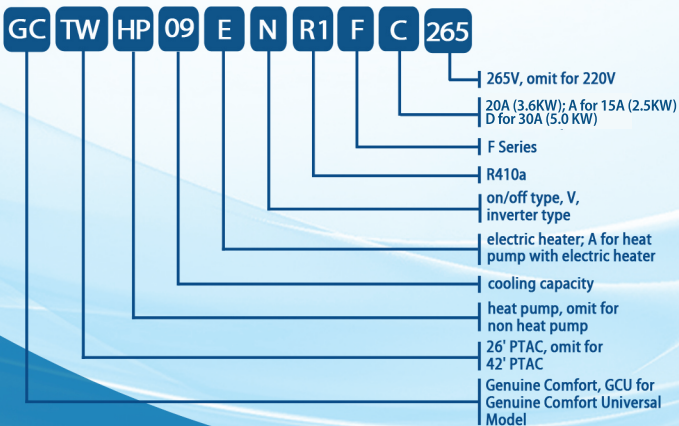


Wall Sleeve



Duct Kit



Drain Kit



Stamped Grille



Architectural Grille



Sub-Base



Wireless Thermostat



Occupancy Sensor Thermostat



Wired Thermostat

For More Information Visit  
[www.genuinecomfort.com](http://www.genuinecomfort.com)

ACCESSORIES

FEATURES

**COOLING WITH ELECTRIC HEATER 208-230V/60HZ R410A**
**SPECIFICATIONS**

Sale Model			GC-07ENR1F	GC-09ENR1F	GC-12ENR1F	GC-15ENR1F
Power supply		V-Ph-Hz	230/208V /60Hz	230/208V /60Hz	230/208V /60Hz	230/208V /60Hz
Power supply type			1Ph	1Ph	1Ph	1Ph
Cooling	Capacity	Btu/h	7400/7200	9500/9300	12200/12000	14700/14500
	Input	W	620/605	835/815	1140/1120	1470/1450
	EER	Btu/h.W	11.9/11.9	11.4/11.4	10.7/10.7	10.0/10.0
Heating	Capacity	Btu/h	/	/	/	/
	Input	W	/	/	/	/
	COP	Btu/h.W	/	/	/	/
Cooling power factor			0.992/0.994	0.987/0.990	0.956/0.963	0.985/0.991
Electric heater capacity		A(KW)	15A(2.5KW) / 20A(3.6KW) / 30A(5KW)	15A(2.5KW) / 20A(3.6KW) / 30A(5KW)	15A(2.5KW) / 20A(3.6KW) / 30A(5KW)	15A(2.5KW) / 20A(3.6KW) / 30A(5KW)
Max. input consumption		W	750	1050	1460	1950
Max. current		A	3.6	5.1	7.3	9.4
Indoor air flow (Hi/Lo)		m3/h	720/620	700/620	750/650	800/700
Indoor sound level (sound pressure level)		dB(A)	49/41	49/40	53/47	52/49
Outdoor air flow		m3/h	1200	1200	1200	1200
Outdoor sound level (sound pressure level )		dB(A)	66	66	66	66
Unit	Dimension(W*H*D)	In	42"Wx16"Hx21"D	42"Wx16"Hx21"D	42"Wx16"Hx21"D	42"Wx16"Hx21"D
	Packing (W*H*D)	In	45"Wx19"Hx25"D	45"Wx19"Hx25"D	45"Wx19"Hx25"D	45"Wx19"Hx25"D
	Net/Gross weight	lbs	99 / 106	102 / 106	108 / 113	112 / 119

**HEAT PUMP WITH ELECTRIC HEATER 208-230V/60HZ R410A**

Sale Model			GCHP-07ANR1F	GCHP-09ANR1F	GCHP-12ANR1F	GCHP-15ANR1F
Power supply		V-Ph-Hz	230/208V /60Hz	230/208V /60Hz	230/208V /60Hz	230/208V /60Hz
Power supply type			1Ph	1Ph	1Ph	1Ph
Cooling	Capacity	Btu/h	7200/6800	9200/9000	12000/11800	14700/14500
	Input	W	605/570	805/790	1130/1110	1470/1450
	EER	Btu/h.W	11.9/11.9	11.4/11.4	10.6/10.6	10.0/10.0
Heating	Capacity	Btu/h	6000/5800	8300/8100	10800/10500	13600/13400
	Input	W	520/500	715/700	960/930	1245/1225
	COP	Btu/h.W	3.4/3.4	3.4/3.4	3.3/3.3	3.2/3.2
Cooling power factor			0.992/0.994	0.987/0.990	0.956/0.963	0.985/0.991
Heating power factor			0.990/0.991	0.987/0.988	0.936/0.940	0.983/0.991
Max. input consumption		W	750	1050	1460	1950
Max. current		A	3.6	5.1	7.3	9.4
Indoor air flow (Hi/Lo)		m3/h	720/620	700/620	720/620	800/700
Indoor sound level (sound pressure level)		dB(A)	49/41	49/40	49/41	52/49
Outdoor air flow		m3/h	1200	1200	1200	1200
Outdoor sound level (sound pressure level )		dB(A)	66	66	66	66
Unit	Dimension(W*H*D)	In	42"Wx16"Hx21"D	42"Wx16"Hx21"D	42"Wx16"Hx21"D	42"Wx16"Hx21"D
	Packing (W*H*D)	In	45"Wx19"Hx25"D	45"Wx19"Hx25"D	45"Wx19"Hx25"D	45"Wx19"Hx25"D
	Net/Gross weight	lbs	99 / 106	102 / 106	108 / 113	112 / 119

For More Information Visit  
[www.genuinecomfort.com](http://www.genuinecomfort.com)

**GENUINE COMFORT**  
 DELIVERING COMFORT CONSISTENTLY