



Genuine Comfort Thru-Wall Air Conditioning Spec Sheet

GENUINE COMFORT
DELIVERING COMFORT CONSISTENTLY


- Universal size – Fits all Thru wall sleeves 24"-27" W
- 24" W x 14.5" H x 21" D
- Trim piece included
- Digital controls
- Includes remote control
- Slide out washable filter for easy cleaning
- Quiet operation: 53-61 DBA
- Dehumidify mode
- Energy saver mode
- Wall sleeve sold separately
- 1 year P&L warranty / 5 year sealed system

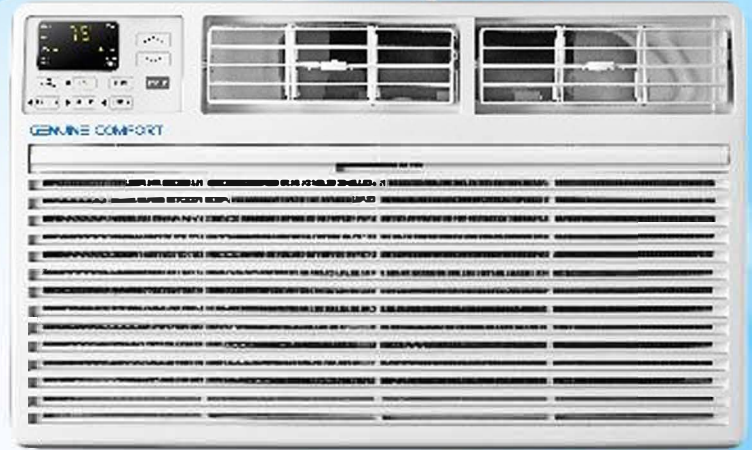


WALL SLEEVE DIMENSIONS

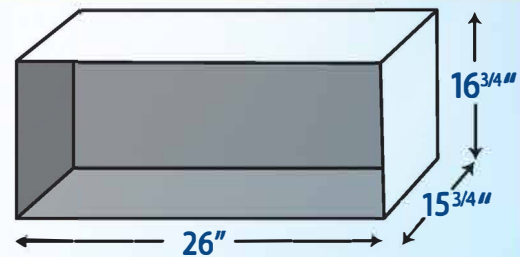

MODEL IDENTIFICATION

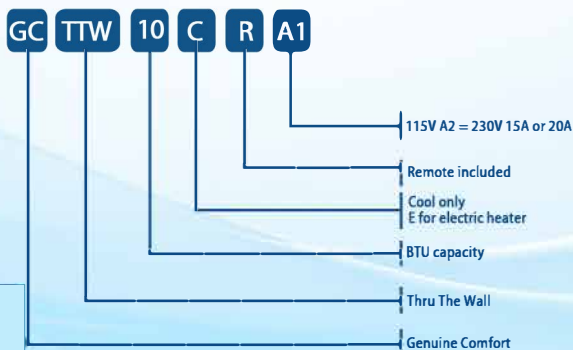

WALL RECEPTACLES

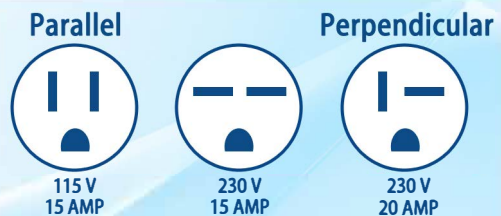

204-201-0717 866-951-0558 (Toll Free)

info@genuinecomfort.com www.genuinecomfort.com

THRU WALL AC COOL ONLY			SPECIFICATIONS				
Model			GCTTW-10CRA1	GCTTW-10CRA2	GCTTW-12CRA1	GCTTW-12CRA2	GCTTW-14CRA2
Capacity			10K	10K	12K	12K	14K
Power supply		Ph-V-Hz	1Ph-115V-60Hz	1Ph, 230/208V, 60Hz	1Ph-115V-60Hz	1Ph, 230/208V, 60Hz	1Ph, 230/208V, 60Hz
Cooling	RATED Capacity	Btu/h	1000	10000/9800	12000	12000/11600	14000/13600
	RATED EER	Btu/w.h,w/w	10.7	10.7	10.6	10.6	9.4
	RATED CEER	Btu/w.h,w/w	10.6	10.6	10.5	10.5	9.3/9.5
	RATED Input	W	940	940/920	1130	1130/1090	1490/1450
	RATED Current	A	8.3	4.2/4.5	10.1	5.1/5.4	6.7/7.2
	Standby power	W	1.3	1.3	1.3	1.3	1.3
Moisture Removal		L/h	1.25	1.25	1.7	1.7	2.15
Max. input consumption		W	1200	1200	1400	1400	2000
Max. current		A	12	6	13.5	7.5	10
Starting current		A	36	20	54	27	34.5
Refrigerant type (R410A)		g	540	560	630	630	630
Indoor air flow (Hi/Med/Lo)		m3/h	420/390/360	450/420/390	470/440/410	450/420/390	450/420/390
	1 m3/h = 0.588 ft3/min	CFM	247/229/212	265/247/229	276/259/241	265/247/229	265/247/229
Indoor noise level (Hi/Med/Lo)		dB(A)	57/55/53	58/56/54	60/58/56	60/58/56	61/59/57
Outdoor air flow (Hi/Med/Lo)		m3/h	700/660/620	730/680/640	760/710/660	760/710/660	760/710/660
Outdoor noise level (Hi/Med/Lo)		dB(A)	66/64/62	66/64/62	68/66/64	68/66/64	69/67/65
Plug type			14#x3 / LCDI	14#x3 / LCDI	14#x3 / LCDI	14#x3 / LCDI	14#x3 / LCDI
Plug Face (NEMA#)			5-15P	6-15P	5-15P	6-15P	6-15P
Power Cord Length		mm	1800	1800	1800	1800	1800
Power Cord Length		ft	5.9	5.9	5.9	5.9	5.9
Control type			Remote Control	Remote Control	Remote Control	Remote Control	Remote Control
Application area (Cooling EPA)		sq. ft	400-450	400-450	450-550	450-550	550-700
Dimension(W*D*H)		mm	615x515x369	615x515x369	615x515x369	615x515x369	615x515x369
		in	24.21x20.28x14.53	24.21x20.28x14.53	24.21x20.28x14.53	24.21x20.28x14.53	24.21x20.28x14.53
Packing (W*D*H)		mm	705x675x416	705x675x416	705x675x416	705x675x416	705x675x416
		in	27.76x26.57x16.38	27.76x26.57x16.38	27.76x26.57x16.38	27.76x26.57x16.38	27.76x26.57x16.38
Net/Gross weight		Kg	33.5/39	33.5/39	34/40	34/40	34.5/40.5
		lbs	73.85/86	73.85/86	74.96/88.18	74.96/88.18	76.06/89.29
Packing (W*D*H)		mm	705x685x465	705x685x465	705x685x465	705x685x465	705x685x465
Gross weight		Kg	39.7	39.7	40.7	40.7	41.2
Loading quantity 20' /40' /40'HQ		Pieces	120/255/306	120/255/306	120/255/306	120/255/306	120/255/306

THRU WALL AC WITH ELECTRIC HEAT			GCTTW-08ERA1	GCTTW-10ERA2	GCTTW-12ERA2	GCTTW-14ERA2
Model						
Capacity			8K	10K	12K	12K
Power supply		Ph-V-Hz	1Ph-115V-60Hz	1Ph, 230/208V, 60Hz	1Ph, 230/208V, 60Hz	1Ph, 230/208V, 60Hz
Cooling	RATED Capacity	Btu/h	8000	10000/9800	12000/11600	14000/13600
	RATED EER	Btu/w.h,w/w	9.7	9.7	9.7	9.4
	RATED CEER	Btu/w.h,w/w	9.6	9.6	9.6	10.5
	RATED Input	W	810	1030/1000	1230/1190	1490/1450
	RATED Current	A	7.2	4.6/4.9	10.1	5.1/5.4
	Standby power	W	1.3	1.3	1.3	1.3
Heating	RATED Capacity	Btu/h	4200	10600/8600	10600/8600	10600/8600
	RATED Input (Heater)	W	1320	3500	3500	3500
	Total Input	W	1450	3450/2850	3450/2850	3450/2850
	RATED Current	A	12.5	15/13.5	15/13.5	15/13.5
Moisture Removal		L/h	0.75	1.2	1.65	2.15
Max. input consumption		W	1100	1300	1700	2000
Max. current		A	11	7	8.5	10
Starting current		A	31.5	21	29	34.5
Refrigerant type (R410A)		g	410	560	630	630
Indoor air flow (Hi/Med/Lo)		m3/h	450/420/390	470/440/410	470/440/410	450/420/390
	1 m3/h = 0.588 ft3/min	CFM	265/247/229	276/259/241	276/259/241	265/247/229
Indoor noise level (Hi/Med/Lo)		dB(A)	56/54/52	59/57/55	60/58/56	61/59/57
Outdoor air flow (Hi/Med/Lo)		m3/h	730/680/640	760/710/660	760/710/660	760/710/660
1 m3/h = 0.588 ft3/min		ft3/min	429/400/376	447/417/388	447/417/388	447/417/388
Outdoor noise level (Hi/Med/Lo)		dB(A)	65/63/62	66/64/62	68/66/64	69/67/65
Plug type			12#x3 / LCDI	12#x3 / LCDI	12#x3 / LCDI	12#x3 / LCDI
Plug Face (NEMA#)			5-15P	6-20P	6-20P	6-20P
Power Cord Length		mm	1450	1450	1450	1450
Power Cord Length		ft	4.8	4.8	4.8	4.8
Control type			Remote Control	Remote Control	Remote Control	Remote Control
Application area (Cooling EPA)		sq. ft	300-350	400-450	450-550	550-700
Dimension(W*D*H)		mm	615x515x369	615x515x369	615x515x369	615x515x369
		in	24.21x20.28x14.53	24.21x20.28x14.53	24.21x20.28x14.53	24.21x20.28x14.53
Packing (W*D*H)		mm	705x675x416	705x675x416	705x675x416	705x675x416
		in	27.76x26.57x16.38	27.76x26.57x16.38	27.76x26.57x16.38	27.76x26.57x16.38
Net/Gross weight		Kg	30/36	34/39.5	34.5/40.5	35/41
		lbs	66.14/79.37	75/87.08	76.06/89.29	77.16/90.39
Packing (W*D*H)		mm	705x685x465	705x685x465	705x685x465	705x685x465
Gross weight		Kg	36.7	40.2	41.2	41.7
Loading quantity 20' /40' /40'HQ		Pieces	120/255/306	120/255/306	120/255/306	120/255/306

GENUINE COMFORT
DELIVERING COMFORT CONSISTENTLY

 204-201-0717  866-951-0558 (Toll Free)

 info@genuinecomfort.com  www.genuinecomfort.com