

# Accel to Prizm Cable

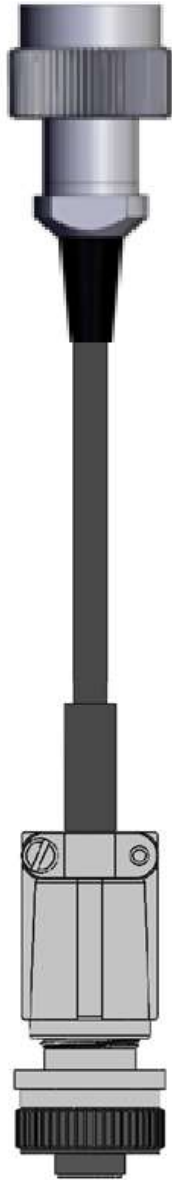


Image for reference only

## Specifications

<b>Application</b>	Online Measurement
<b>Max Temperature</b>	-4°C ~ 176°F (-20°C ~ 80°C)
<b>Connector Type 1</b>	RF Coaxial
<b>Connector Type 2</b>	2 Socket MIL-Spec w/ Backshell
<b>Jacket Material</b>	PVC
<b>Cable Type</b>	Twisted, Shielded Cable
<b>Cable Diameter</b>	0.187" (4.75mm)

## Part Number

<b>Stock Product</b>	PRIZM-ACCEL-CBL-10
<b>Build to order</b>	PRIZM-ACCEL-CBL-XX

*\*XX = Length in foot*

2023, Resonance Systems. All rights reserved.

The contents of this publication are presented for informational purposes only, and while diligent efforts have been made to ensure their accuracy, they should not be considered as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.

**Resonance Systems**  
8609 Kingston Pike  
Ste 201  
Knoxville, TN 37923 USA  
+1-865-248-2453