

Strobe Light

P/N: Strobe

Specifications

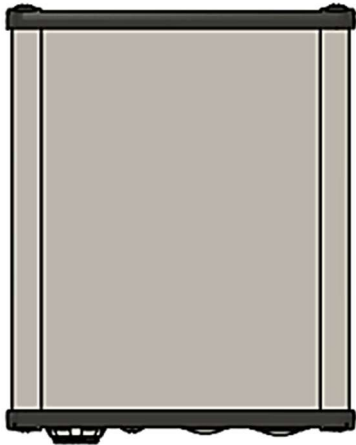


Image for reference only

Application	Portable Measurement
Power Input	24 Vdc
Bulb Type	LED
Lamp Output	Lumens
Size	5 x5 X 1.6 in
Inputs	1
Weight	0.75 lb
Housing	Aluminum
Operating Temperature	-20°C to +50°C (-40°F to 120°F)
Storage Temperature	-40°C to +85°C (-140°F to 185°F)
Hazardous Area Rating	Class 1 Division 2, Groups A-D, T4A, IP65
Certifications and Approvals	ISA-12.12.01; CAN/CSA C22.2 No 213-15, Class 1 Division2 UL 61010-1, FCC



Applications Tests

Typical Use Performance

Type	Temperature 70°F (Hours)
Lamp Life	~ 50,000

2023, Resonance Systems. All rights reserved.

The contents of this publication are presented for informational purposes only, and while diligent efforts have been made to ensure their accuracy, they should not be considered as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.

Resonance Systems
 8609 Kingston Pike
 Ste 201
 Knoxville, TN 37923 USA
 +1-865-248-2453