

Turbo Kit

P/N: LNZ-2CHBO

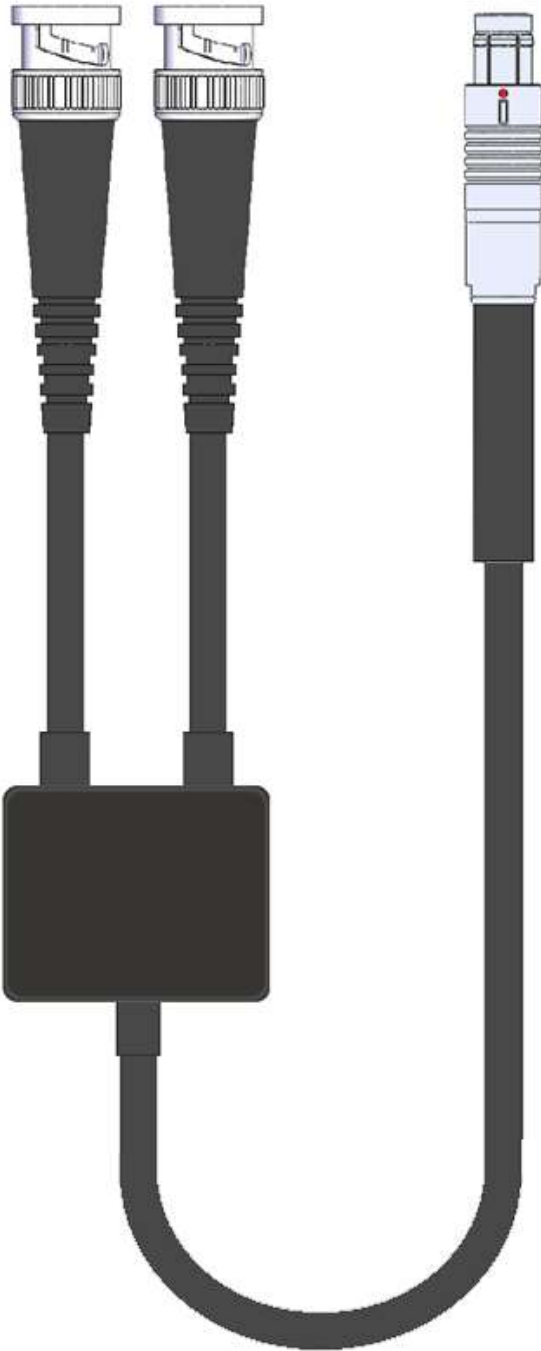


Image for reference only

Specifications

Application	Portable Measurement
Max Temperature	-58°F ~ 257°F (-50°C ~ 125°C)
Connector Type 1	2 x BNC Plug Connector
Connector Type 2	Fischer Connector
Jacket Material	Thermoplastic Elastomer (TPE)
Cable Type	Twisted, Shielded Pair Cable
Cable Diameter	0.252" (6.4mm)
Box Dim	2" x 1.5" x 0.5" (5 x 38.1 x 12.5mm)

Kit Part Number

Stock Product	RES-TURB-KIT-XXX*
----------------------	-------------------

*2CH = 2 Channel

*4CH = 4 Channel

Include:

1 x KPSR-CBL-5

2 x PX-AB-CBL-6

1 x LNZ-2CHBO-5 (Only with 4 Channel kits)

Item Part Number

Stock Product	LNZ-2CHBO-5
----------------------	-------------

Build to Order LNZ-2CHBO-XX*

*XX = Length in foot

2023, Resonance Systems. All rights reserved.

The contents of this publication are presented for informational purposes only, and while diligent efforts have been made to ensure their accuracy, they should not be considered as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.

Resonance Systems

8609 Kingston Pike

Ste 201

Knoxville, TN 37923 USA

+1-865-248-2453

Turbo Kit

P/N: PX-AB-CBL

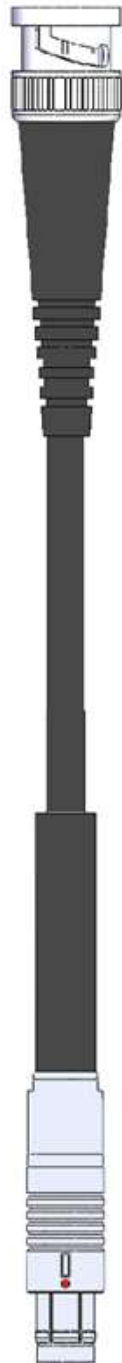


Image for reference only

Specifications

Application	Portable Measurement
Max Temperature	-58°F ~ 257°F (-50°C ~ 125°C)
Connector Type 1	BNC Plug Connector
Connector Type 2	Fischer Connector
Jacket Material	Thermoplastic Elastomer (TPE)
Cable Type	Twisted, Shielded Pair Cable
Cable Diameter	0.252" (6.4mm)

Kit Part Number

Stock Product	RES-TURB-KIT-XXX*
	*2CH = 2 Channel
	*4CH = 4 Channel
	<i>Include:</i>
	1 x KPSR-CBL-5
	2 x PX-AB-CBL-6
	1 x LN2-2CHBO-5 (Only with 4 Channel kits)

Item Part Number

Stock Product	PX-AB-CBL-6
Build to Order	PX-AB-CBL-XX*
	*XX = Length in foot

2023, Resonance Systems. All rights reserved.

The contents of this publication are presented for informational purposes only, and while diligent efforts have been made to ensure their accuracy, they should not be considered as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.

Resonance Systems
8609 Kingston Pike
Ste 201
Knoxville, TN 37923 USA
+1-865-248-2453

Turbo Kit

P/N: KPSR-CBL

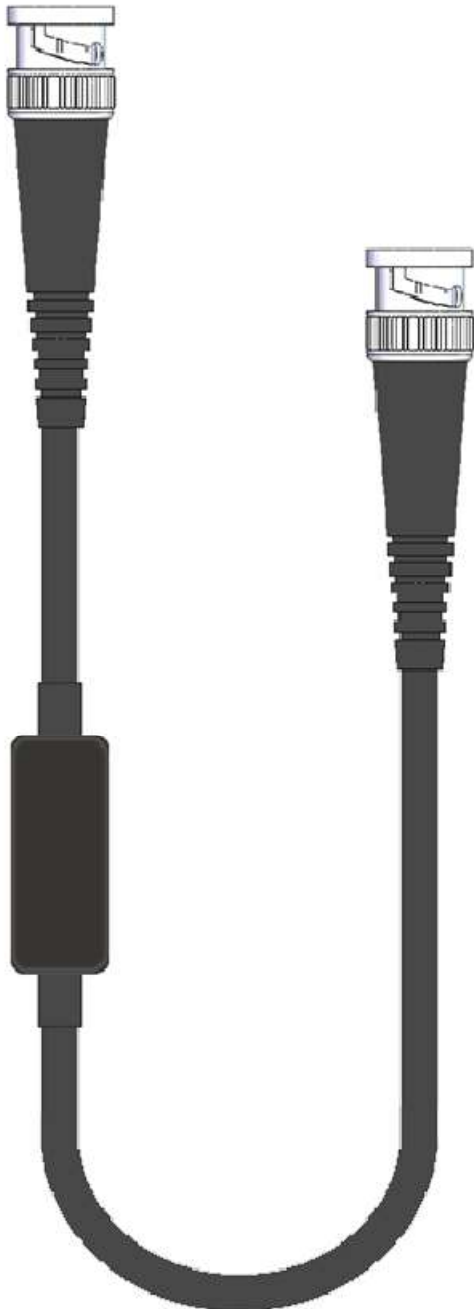


Image for reference only

Specifications

Application	Portable Measurement
Max Temperature	-58°F ~ 257°F (-50°C ~ 125°C)
Connector Type 1	BNC Plug Connector
Connector Type 2	BNC Plug Connector
Jacket Material	Thermoplastic Elastomer (TPE)
Cable Type	Twisted, Shielded Pair Cable
Cable Diameter	0.252" (6.4mm)

Part Number

Stock Product	RES-TURB-KIT-XXX*
	*2CH = 2 Channel
	*4CH = 4 Channel
	<i>Include:</i>
	1 x KPSR-CBL-5
	2 x PX-AB-CBL-6
	1 x LN2-2CHBO-5 (Only with 4 Channel kits)

Item Part Number

Stock Product	KPSR-CBL-5
Build to Order	KPSR-CBL-XX*
	*XX = Length in foot

2023, Resonance Systems. All rights reserved.

The contents of this publication are presented for informational purposes only, and while diligent efforts have been made to ensure their accuracy, they should not be considered as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.

Resonance Systems
 8609 Kingston Pike
 Ste 201
 Knoxville, TN 37923 USA
 +1-865-248-245