

# Ultronix

P/N: RES-ULT-IR

## Specifications

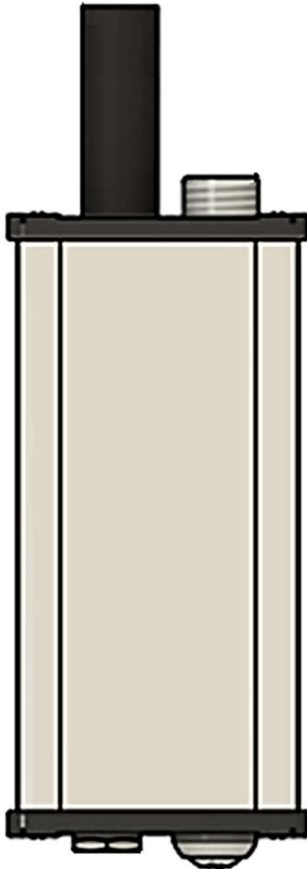


Image for reference only

<b>Application</b>	Portable Measurement
<b>Power Input</b>	24 Vdc, 65 mA max
<b>Size</b>	2.3 x 6.6x 1.38 inch
<b>Weight</b>	12 oz
<b>Temp Sensing Range</b>	32°F to 482°F (0°C to 250°C)
<b>Ultrasonic Range</b>	38 kHz to 42 kHz
<b>Material</b>	Aluminum
<b>Electrical Interface</b>	Ultrasonic: Constant Current/ ICP Temperature: 4-20 mA
<b>Operating Temperature</b>	-4 °F to 120 °F (-20 °C to 50 °C)
<b>Storage Temperature</b>	-40 °F to 185 °F (-40 °C to 85 °C)
<b>Hazardous Area Rating</b>	Class 1 Division 2, Groups A-D, T4A, IP65
<b>Certifications &amp; Approvals</b>	ISA-12.12.01; CAN/CSA C22.2 No 213-15, Class 1 Division2 UL 61010-1, FCC



2023, Resonance Systems. All rights reserved.

The contents of this publication are presented for informational purposes only, and while diligent efforts have been made to ensure their accuracy, they should not be considered as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.

**Resonance Systems**  
8609 Kingston Pike  
Ste 201  
Knoxville, TN 37923 USA  
+1-865-248-2453