

Cable – Vibration Channel A or B

Specifications

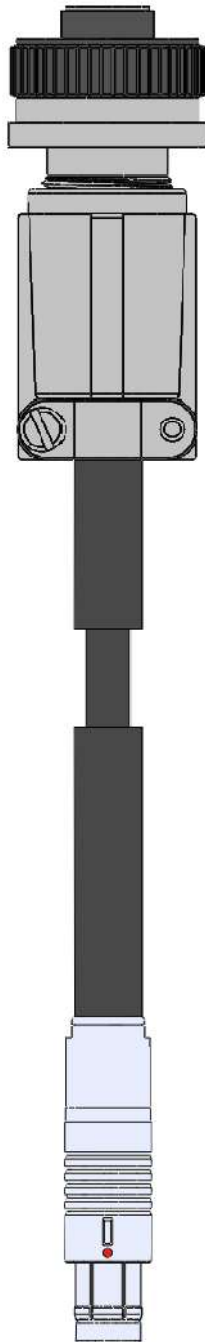


Image for reference only

Application	Portable Measurement
Max Temperature	-58°F ~ 257°F (-50°C ~ 125°C)
Connector Type 1	2 Socket MIL-Spec w/ Backshell
Connector Type 2	Fischer Connector
Jacket Material	Thermoplastic Elastomer (TPE)
Cable Type	Twisted, Shielded Pair Cable
Cable Diameter	0.245" (6 mm)
Lenz Channel	A or B

Part Number

Stock Product	AV-AB-CBL-6
Build to Order	AV-AB-CBL-XX*

*XX = Length in foot

2023, Resonance Systems. All rights reserved.

The contents of this publication are presented for informational purposes only, and while diligent efforts have been made to ensure their accuracy, they should not be considered as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.

Resonance Systems
8609 Kingston Pike
Ste 201
Knoxville, TN 37923 USA
+1-865-248-2453