





Whether it's a BUR, APP, or SBS modified bitumen system there's a GAF roofing system that can fit your need. GAF is developing multi-ply, durable roofing systems for today's roofing challenges.

2-ply SBS Cold-Applied Assembly

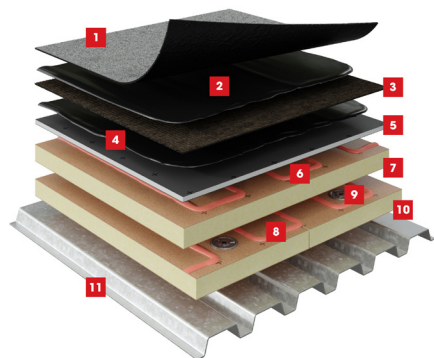


1	RUBEROID® Mop Plus Granule FR Membrane
2	MATRIX™ 101 Premium SBS Mebrane Adhesive
3	RUBEROID® Mop Smooth 1.5 Membrane
4	MATRIX™ 101 Premium SBS Mebrane Adhesive
5	DensDeck® Prime Gypsum Board
6	OlyBond500® Insulation Adhesive
7	EnergyGuard™ Polyiso Insulation
8	OlyBond500® Insulation Adhesive
9	Drill-Tec™ Fasteners and Plates
10	EnergyGuard™ Polyiso Insulation
11	Metal Deck

2-ply APP Torch-Applied Assembly

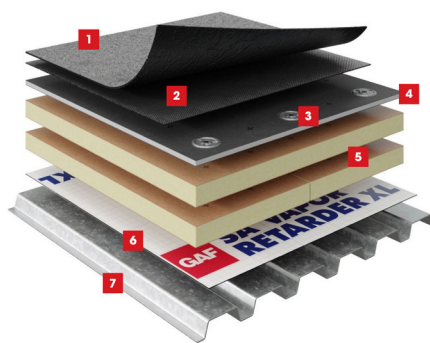

1	RUBEROID® Torch Plus Granule Smooth FR Membrane — White
2	RUBEROID® Torch Smooth Membrane
3	Drill-Tec™ Fasteners and Plates
4	DensDeck® Prime Gypsum Board
5	2 layers of EnergyGuard™ Polyiso Roof Insulation
6	GAF SA Vapor Retarder XL
7	Metal Deck

BUR Assembly

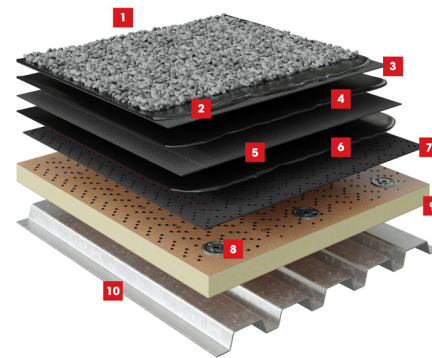


1	Slag or Gravel in Flood-Coat (as-shown) or GAFFLAS Mineral-Surfaced Membrane
2	MATRIX™ 103 Membrane Cold Process Adhesive or Hot-Mopping Asphalt
3	GAFFLAS® FlexPly 6
4	Hot-Mopped Asphalt
5	GAFFLAS FlexPly 6
6	Hot-Mopped Asphalt
7	GAFFLAS® STRATVENT Perforated Venting Base Sheet
8	Drill-Tec™ Fasteners and Plates
9	EnergyGuard™ Polyiso Insulation
10	Metal Deck

DIVISION 7 ASTM REINFORCEMENT/MEMBRANE OVERVIEW:

ASTM D6162	SBS Combination of Polyester & Glass-Fiber Reinforcements
ASTM D6163	SBS Glass-Fiber Reinforcement
ASTM D6164	SBS Polyester Reinforcement
ASTM D6298	SBS Glass-Fiber Reinforced, SBS Membrane with a Factory-Applied Metal Surfacing
ASTM D4897	Glass-Fiber Venting Base Sheet
ASTM D4601	Glass-Fiber Base Sheet
ASTM D6222	APP Polyester Reinforcement
ASTM D6223	APP Combination Polyester & Glass-Fiber Reinforcement

CAP SHEET SURFACING COLORS:

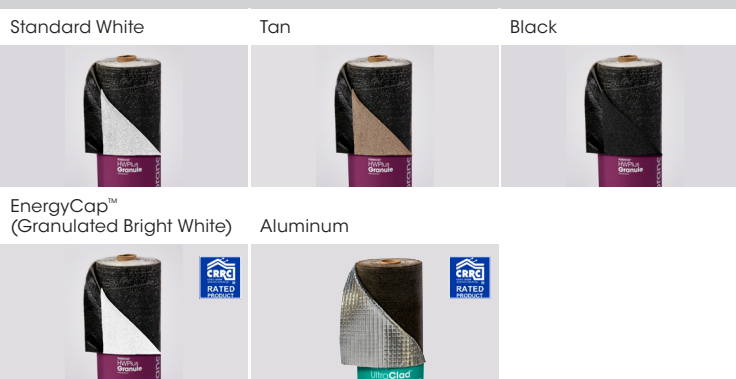

For additional information, contact GAF Design Services at 1-877-423-7663 or designservices@gaf.com.

We protect what matters most™



	Item #	Product (Coverage*)	Type	ASTM	Core†	Mils Thick	Weight/ Roll (lb.)	Rolls/ Pallet	Surfacing Bottom/Top
BUR	3013	GAFLAS® Stratavent® Nailable Venting Base Sheet (1.25 SQ)	Base	D4897 Type II	G	110	79.6 (36.1 kg)	30	Granules / Sand
	3304	GAFLAS® Stratavent® Perforated Venting Base Sheet (1.25 SQ)	Base	D4897 Type II	G	95	70 (31.8 kg)	30	Granules / Sand
	3103	GAFLAS® Ply 4 (5 SQ)	Ply	D2178 Type IV	G	26	40 (18.1 kg)	25	-/-
	3206/ 3208	GAFLAS® FlexPly™ 6 (5 SQ)	Ply	D2178 Type VI	G	30	52.4 (23.8 kg)	25	-/-
	3300	GAFLAS® #75 Base Sheet (3 SQ)	Base	D4601 Type II	G	55	69.3 (31.4 kg)	25	Sand / Sand
	3307	GAFLAS® #80 Ultima™ Base Sheet (2 SQ)	Base	D4601 Type II	G	88	80.4 (36.5 kg)	25	Sand / Sand
	3403	GAFLAS® Mineral-Surfaced Cap Sheet (1 SQ)	Cap	D3909	G	105	68 (30.4 kg)	30	Sand / Granules
	3404/3405	GAFLAS® Mineral-Surfaced Cap Sheet (1.25 SQ)	Cap	D3909	G	95	87.5 (39.7 kg)	30	Sand / Granules
	3407/ 3406‡	GAFLAS® EnergyCap™ Mineral-Surfaced Cap Sheet (1 SQ)	Cap	D3909	G	140	72.2 (32.8 kg)	30	Sand / Bright White Granules
APP Torch Applied	3603	RUBEROID® Torch Smooth (1 SQ)	Base	D6222 Type I	P	160	85 (38.6 kg)	25	Burn-Off Film / Talc/Sand
	3605	RUBEROID® Torch Granule (1 SQ)	Cap	D6222 Type I	P	165	108 (49.0 kg)	25	Burn-Off Film / Granules
	3861	RUBEROID® Torch Plus Granule FR (1 SQ)	Cap	D6222 Type II	P	175	102 (46.3 kg)	25	Burn-Off Film / Granules
	386F/ 386D‡	RUBEROID® EnergyCap™ Torch Granule FR (1 SQ)	Cap	D6222 Type I	P	160	104 (47.2 kg)	25	Burn-Off Film / Bright White Granules
	386E/ 386C‡	RUBEROID® EnergyCap™ Torch Plus Granule FR (1 SQ)	Cap	D6222 Type II	P	175	105 (47.6 kg)	25	Burn-Off Film / Bright White Granules
SBS Heat-Weld Applied	3787	Ruberoïd HW 20 Smooth (1.5 SQ)	Base	D6163 Type I	G	90	97 (44.0 kg)	25	Burn-off film / Mineral Parting Agent
	3784	Ruberoïd HW 30 Smooth (1 SQ)	Base	D6163 Type I	G	120	86 (39.0 kg)	25	Burn-off film / Mineral Parting Agent
	3757	RUBEROID® HW 25 Smooth (1.5 SQ)	Base	D6163 Type I	G	95	100 (45.4 kg)	30	Burn-Off Film / Sand
	3754	RUBEROID® HW Smooth (1 SQ)	Base	D6164 Type I	P	120	85 (38.6 kg)	30	Burn-Off Film / Sand
	3750	RUBEROID® HW Granule (1 SQ)	Cap	D6164 Type I	P	150	105 (47.6 kg)	25	Burn-Off Film / Granules
	3752	RUBEROID® HW Granule FR (1 SQ)	Cap	D6164 Type I	P	160	105 (47.6 kg)	25	Burn-Off Film / Granules
	3751	RUBEROID® HW Plus Granule (1 SQ)	Cap	D6164 Type II	P	160	105 (47.6 kg)	25	Burn-Off Film / Granules
	3753	RUBEROID® HW Plus Granule FR (1 SQ)	Cap	D6164 Type II	P	165	105 (47.6 kg)	25	Burn-Off Film / Granules
	375C/ 375B‡	RUBEROID® EnergyCap™ HW Plus Granule FR (1 SQ)	Cap	D6164 Type II	P	160	105 (47.6 kg)	20	Burn-Off Film / Bright White Granules
	3785 / 3786‡	Ruberoïd EnergyCap HW 30 Granule FR	Cap	D6163 Type I	G	140	105 (47.6 kg)	23	Burn-off film / Bright White Granules
SBS Hot Mop/ Cold-Applied	3706	RUBEROID® 20 Smooth (1.5 SQ)	Base	D6163 Type I	G	85	89 (40.4 kg)	30	Sand / Sand
	3703	RUBEROID® Mop Smooth (1 SQ)	Base	D6164 Type I	P	130	83 (37.6 kg)	30	Sand / Sand
	3710	RUBEROID® Mop Smooth 1.5 (1.5 SQ)	Base	D6164 Type I	P	97	88 (39.9 kg)	25	Sand / Sand
	3702	RUBEROID® Mop Plus Smooth (1 SQ)	Base	D6164 Type II	P	140	85 (38.6 kg)	30	Sand / Sand
	3709	RUBEROID® 30 Granule FR (1 SQ)	Cap	D6163 Type I	G	145	96 (43.5 kg)	25	Mineral / Granules
	3705	RUBEROID® Mop Granule (1 SQ)	Cap	D6164 Type I	P	140	90 (41.0 kg)	30	Sand / Granules
	3866	RUBEROID® Mop Granule FR (1 SQ)	Cap	D6164 Type I	P	150	102 (46.5 kg)	25	Sand / Granules
	3700	RUBEROID® Mop Plus Granule (1 SQ)	Cap	D6164 Type II	P	160	100 (45.4 kg)	25	Sand / Granules
	3865	RUBEROID® Mop Plus Granule FR (1 SQ)	Cap	D6164 Type II	P	155	100 (45.4 kg)	25	Sand / Granules
	370N/ 370G‡	RUBEROID EnergyCap™ Mop Plus Granule FR (1 SQ)	Cap	D6164 Type II	P	160	105 (47.6 kg)	20	Sand / Bright White Granules
	370M/ 370H‡	RUBEROID® EnergyCap™ 30 Granule FR (1 SQ)	Cap	D6163 Type I	G	145	100 (45.4 kg)	23	Sand / Bright White Granules
	3713A44	RUBEROID® UltraClad™ SBS (1 SQ) (Hot Mop and Heat-Weld Applications Only)	Cap	D6298	G	150	96 (43.5 kg)	23	Sand / Embossed Aluminum

* For coverage information please refer to product data sheets located at gaf.com † Core Reinforcement: G = Glass-Fiber P = Polyester ‡ Title 24 Compliant

Asphaltic Accessories				
Item #		Product	Details	Units/Pallet
4302 W/B/T/UBW	4306 BW	Mineral Shield Granules (Color Specific)	5 Gal.	36
4302 W/B/T/BW/UBW		Mineral Shield Granules (Supersack)	2,000 – 2,200 lb. Supersack	1
425P		Matrix 101 (Premium SBS Membrane Adhesive)	5 Gal., 55 Gal.	48
415E		Matrix 201 (SBS Premium Flashing Cement)	5 Gal.	48
415L		Matrix 102 (SBS Membrane Adhesive)	5 Gal., 55 Gal.	48
415M		Matrix 202 (SBS Roof Flashing Cement)	5 Gal.	48
415N		Matrix 103 (Cold Process Adhesive)	5 Gal.	48
415O		Matrix 203 (Plastic Roof Cement)	5 Gal.	48
415P		Matrix 204 (Wet/Dry Roof Cement)	5 Gal.	48
415Q		Matrix 307 (Premium Asphalt Primer)	1 Gal., 5 Gal., 55 Gal.	48
4M9P920MW		M-Bond™ Adhesive/Sealer	10.1 Oz. Tubes	12 Tubes/Box
4249		MajorSeal® Liquid Flashing Kit (Not for use with APP or PVC applications)	Kit	48 Kits
4251		MajorSeal® 4-Pack (2-Liters/Pouch)	4 2-Liter Pouches/Box	48 Boxes

PMMA		
Item #	Product	Details
8183	PMMA Flashing Resin — Summer Grade - Grey	2.6 Gal. (10 kg)
8184	PMMA Flashing Resin — Winter Grade - Grey	2.6 Gal. (10 kg)
8186	PMMA Catalyst 0.1 kg	10/Box
89S004	PMMA Fleece 1' x 82'	180 Rolls/Box
89S003	PMMA Fleece 3.4' x 164'	30 Rolls/Box
8185	PMMA Cleaner	1 Gal. Pail

Product warranties and system guarantees are available. Contact your local GAF Commercial sales representative for requirements, availability, and limitations. See warranties and guarantees on GAF.com for complete coverage and restrictions.

Products listed and packaging quantities are subject to change. Please contact your local GAF Commercial sales representative for current product and packaging information.