



دكان العم
Uncle's Shop

SOLID
Heavy-Duty Flooring
ISO 9001/20015 CERTIFIED



This is our standard shade card. Slight variation in colour may occur

www.unclesshopdubai.com

Uncle's Shop




دكان العم

SOLID

Commercial
Flooring

ISO 9001/20015 CERTIFIED

Heavy-Duty Flooring

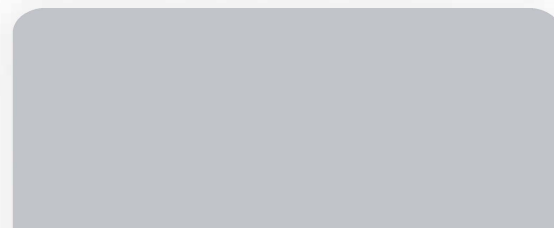

LIGHT GREY
(HM0014)




SLATE GREY
(HM0001)



ASH GREY
(HM0002)



BRIGHT ORANGE
(HM0011)

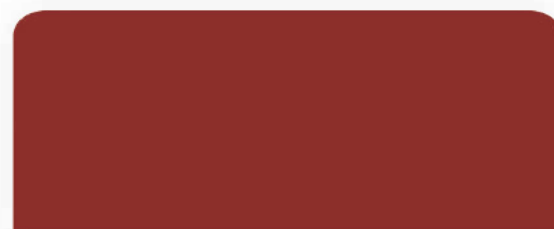

RUBY RED
(HM0009)



COPPER RED
(HM0008)



BLACK
(HM0015)



LILLY WHITE
(HM0016)

FEATURES






1 TO 3
MM

300 x 300
600 x 600

3.5mtr
WIDTH

SOLID
Commercial Flooring
ISO 9001/20015 CERTIFIED

Heavy-Duty Flooring

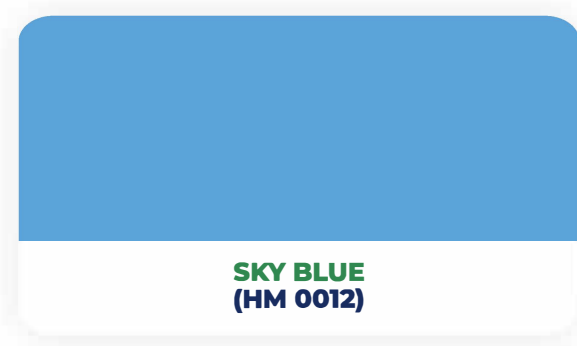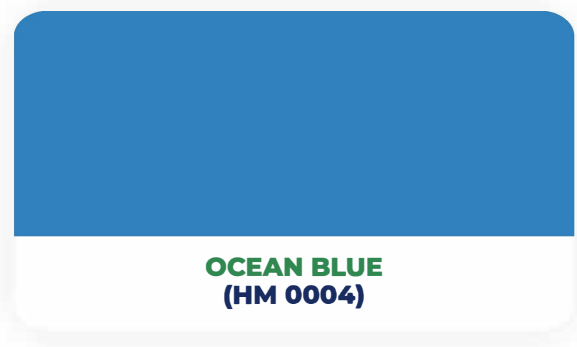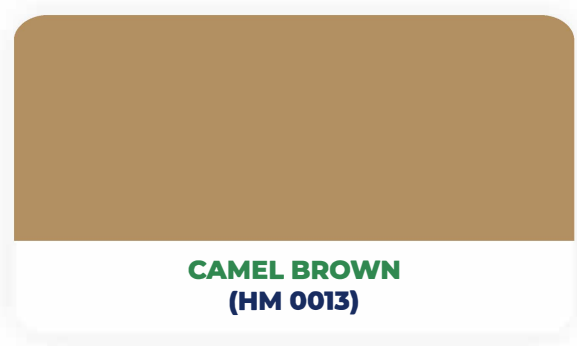

HEAVY DUTY DURABLE, RESILIENT FULLY FLEXIBLE FLOORING

- PORTA CABINS
- PRE-FABRICATED STRUCTURES
- LOW BUDGET PROJECTS
- LABOUR CAMPS
- WAREHOUSE
- SHOP FLOOR
















APPLICATIONS



Solid Flooring is heavy duty, flexible, fully PVC flooring from MegaFloor, it ensure wear resistance and dimensional stability. It is most suitable in high traffic areas. Solid flooring is available in different. Thickness and Colours with range of 1.0/1.5/2.0/3.0mm width availability up to 3.5mtr

Resistance to Chemiacals:

Solid Flooring is normally resistant to mild diluted acids and alkalies. The surface must be cleaned immediately if concentrated acid or alkalies spill.

PRODUCT SPECIFICATION			
CHARACTERISTICS	SYMBOLS	TEST METHOD	RESULTS
Thickness		EN 428	1MM/1.50MM/ 2.00 MM
WEIGHT		EN 430	1.80 / 2.70 / 3.60 GSM
DIMENSIONAL STABILITY		EN 434	≤0.40%
FLEXIBILITY		EN 435	40 MM MANDREL, PASSED
SLIP RESISTANCE		DIN 51130	R 9
ABRASION RESISTANCE		EN 660-2 EN 649	WEAR GROUP M
RESIDUAL INDENTATION AFTER STATIC LOAD		EN 443	≤0.10 MM
CASTER CHAIR		EN 425	WITHOUT DAMAGE OF SURFACE/ CONTINUOUS USE
COLOUR FASTNESS TO DAY LIGHT		ISO 105-BO2	BLUE WOOL STANDARD 5
SURFACE SPREAD OF FLAME		BS 476 PART 7	CLASS 1
FIRE PROPAGATION		BS 476 PART 6	(I)=10.8 } CLASS "O" (II)=1.7
STAIN AND CHEMICAL RESISTANCE		EN 423	NO VISIBLE CHANGE
FUNGI AND BACTERIAL RESISTANCE		EN ASTM G-21	DOES NOT FAVOR GROWTH
SOUND ABSORPTION		ISO 140-8 EN ISO 717-2	Δ LW = 5db
PERFORMANCE CLASSIFICATION		EN 685	32, 33



APPLICATIONS



To know more about our product or talk to our executive feel free to contact us on the below details :



دكان العم لتجارة مواد البناء
Uncle's Shop Building Material Trading

P O Box 166, Dubai - U.A.E.

Tel: + 9714 5463066, Mob: + 97150 4709693

Email: enquiry@unclesshopdubai.com

www.unclesshopdubai.com