



SPECIAL EDITION

NIKOLATESLA collection

Design Fabrizio Crisà

 **elica**
aria nuova



AIRMATIC

AIRMATIC

The Airmatic function uses sensors to measure quantity and type of the fumes to set the most suitable extraction power.



AUTO
CAPTURE

AUTOCAPTURE

The extraction system adjusts auto-matically to the number and power of the cooking zones being used.



CHILD LOCK

CHILD LOCK

The Child Lock function prevents the hob's cooking zones or extraction being turned on accidentally.



BRIDGE ZONES

BRIDGE ZONES

This function merges 2 adjacent cooking zones so they work as one. Very useful large pans.



CERAMIC HP
FILTER

CERAMIC HP FILTER

Elica's latest filter for recirculating versions of NikolaTesla has been designed for the highest performance and the longest life. It's performance is maintained by simply regenerating in an oven and it lasts for up to 5 years making it the most environmentally friendly as well as cost effective filter available.



COMFORT
SILENCE

COMFORT SILENCE

With Comfort Silence hoods the sound level even at maximum extraction speed does not disturb or interfere with normal conversation. Particularly valuable in an open-plan living area.



DUAL
ZONE

DUAL ZONES

The hob is equipped with two concentric zones which can be used separately. Regardless of whether you use a small pot or large pan, your hob will always be at its optimum.



EASY
MAINTENANCE

EASY MAINTENANCE

Elica products are designed with materials and finishes for easy maintenance. All filters can be easily accessed for cleaning and replacement.



EXTRA LARGE
ZONE

EXTRA LARGE ZONE

The extra-large zone heats all the base of pans up 30 cm in diameter. It is very powerful for fast heating and even heat distribution over a large area.



FAST BOIL

FAST BOIL

Just one touch sets the cooking zone at maximum power for 10 minutes bringing the contents of a pan to a boil 30% faster than most available induction hobs.



MAINTENANCE
WARNING

MAINTENANCE WARNING

An indicator light alerts the you when the grease or odour filters are about to reach saturation so you know it's time to clean or replace them.



MELTING
MODE

MELTING MODE

The Melting Mode feature keeps the temperature very low (below 50°) for gently melting or heating ingredients with no risk of them sticking to the bottom of the pan and without the need to continuously stir.



MULTI FLEX
SPACE

MULTI FLEX SPACE

With the Multi Flex Space design, you have extra space and can slide pans from one burner to another without lifting them.



POT DETECTOR

POT DETECTOR

The Pot Detector detects the presence of a pot and heats it only when it is correctly positioned.



RECALL

RECALL

After switching off the hob use the recall feature to re-activate all functions as they were: just one touch is all it takes to reset all of the previously used settings on all cooking zones and the extraction system.



SIMMERING
MODE

SIMMERING MODE

This particular feature controls the power level to simmer for long periods of time without boiling over. At the same time, it prevents the food drying out or burning at the bottom of the pan which can be a problem when preparing rice, thick soups and stews.



STOP & GO

STOP & GO

If you need to interrupt cooking, with a single touch you can switch off all the cooking zones.



ELICA SUPER EASY
INSTALLATION
SYSTEM

ELICA SUPER EASY INSTALLATION SYSTEM

With the exclusive Elica Super Easy system, installation can be done in safety in just a few steps.



TASTY FRY

TASTY FRY

Ensures great tasting fried foods as the zone use high power to reach and then maintain the ideal frying temperature (180°) for healthier and delicious results.



TIMER

TIMER

The cooking zone will automatically switch off after the number of minutes set and a beeper will sound. You can set independent timers for more than one zone at the same time.



TOTAL
INTEGRATION

TOTAL INTEGRATION

The minimalist look is becoming increasingly popular and Elica's Total Integration products have been designed to be seamlessly integrated into the kitchen preserving the cleanest of lines.



WARMING
MODE

WARMING MODE

This feature is designed for warming foods and keeping them warm. It is also excellent for low temperature cooking and for heating liquids such as milk and cream sauces where it is important not to overheat them.




NikolaTesla combines two separate appliances in just one product - the induction hob and a cooker hood - to create the extractor-hob, thus redefining the design possibilities and the way you use your kitchen.

ENHANCE YOUR EXPERIENCE BY CHOOSING THE MODEL THAT SUITS YOU BEST.

The NikolaTesla range of integrated extractor hobs is Elica's answer to the demand for style, performance and ease of use. But it doesn't stop there.

NikolaTesla is the solution for anyone whose aim is to conjure up an emotion in the kitchen as well as cooking. The emotion of being amazed. The emotion of outdoing yourself with ambitious recipes and not having to worry about the fumes. The peace of mind of being able to install and use the product with the greatest of ease. The pleasant surprise of being able to clean it quickly and easily. The enjoyment of using an extractor-hob every day that seems to have been tailor-made for your home.

With cutting edge technology, designed to provide the best extraction and cooking performance, encased in a simple yet sophisticated design, manufactured from tough materials with beautifully crafted finishes - this is NikolaTesla.

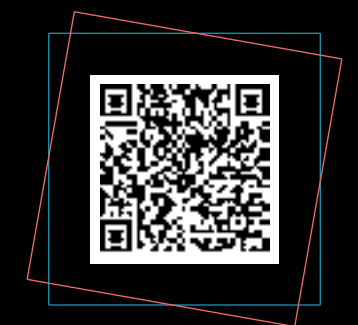


VIEW AND DISCOVER

NEW

NIKOLATESLA ONE HP

SIZE	83 x 51.5 x 21cm
CUT OUT SIZE	80.7 x 49.2cm
VERSIONS	Duct-out and Re-circulating Black Glass

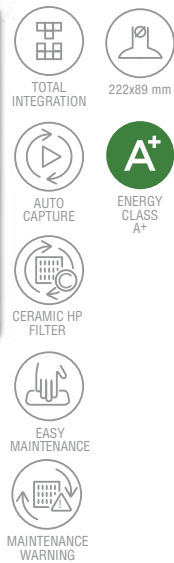

NEW

NIKOLATESLA UNPLUGGED


SIZE	90 x 53 x 21cm
CUT OUT SIZE	80.7 x 49.2cm
VERSIONS	Duct-out and Re-circulating Black Glass, black glass + stainless steel



UNPLUGGED BLACK GLASS




UNPLUGGED BLACK GLASS + STAINLESS STEEL

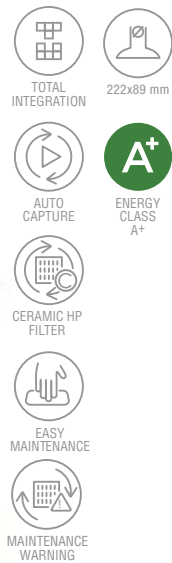

NEW


NIKOLATESLA SWITCH GLOW

SIZE	83 x 51.5 x 21cm
CUT OUT SIZE	80.7 x 49.2cm
VERSIONS	Duct-out and Re-circulating Black Glass

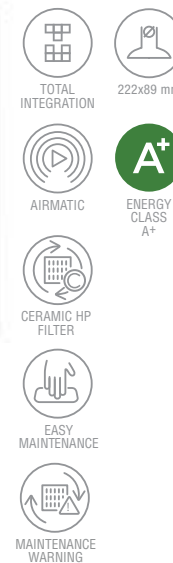

NIKOLATESLA SWITCH

SIZE	83 x 51.5 x 21cm
CUT OUT SIZE	80.7 x 49.2cm
VERSIONS	Duct-out and Re-circulating Black Glass, White Glass

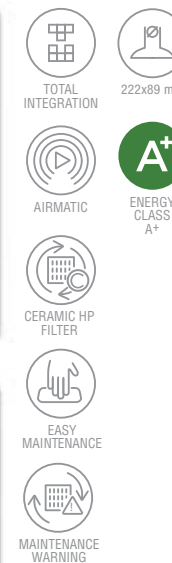


EXTRACTOR

	Duct-out	Re-circulating
Controls	Individual touch control	Individual touch control
Speeds	9 plus boost	9 plus boost
Booster airflow	640	545
Airflow speed	5.1 m/s	5.1 m/s
Noise level min-max	34-66 dBA	40-72 dBA
Total power absorption	175 W	175 W
Ceramic filter	*	Included

INDUCTION HOB

Controls	Touch control
Power levels	9 plus boost
Maximum power absorption	7.4 kW
Cooking zones	1 220mm x 184 mm - 2.1kW / 3.7kW 2 220mm x 184 mm - 2.1kW / 3.7kW 3 220mm x 184 mm - 2.1kW / 3.7kW 4 220mm x 184 mm - 2.1kW / 3.7kW
Bridge zones	2

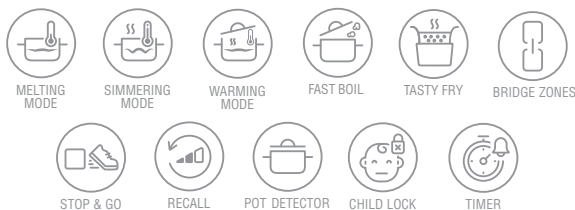

MODELS

NIKOLATESLA ONE HP Black Duct-out	PRF0120975A
NIKOLATESLA ONE HP Black Re-circulating	PRF0120976A

* Not used for Duct-out hoods

EXTRACTOR

	Duct-out	Re-circulating
Controls	Electronic rotary control	Electronic rotary control
Speeds	9 plus boost	9 plus boost
Booster airflow	630	550
Airflow speed	5.1 m/s	5.1 m/s
Noise level min-max	33-66 dBA	39-72 dBA
Total power absorption	175W	175W
Ceramic filter	*	Included

INDUCTION HOB

Controls	Electronic rotary control
Power levels	9 plus boost
Maximum power absorption	7.4 kW
Cooking zones	1 220mm x 184 mm - 2.1kW/3.7kW 2 220mm x 184 mm - 2.1kW/3.7kW 3 220mm x 184 mm - 2.1kW/3.7kW 4 220mm x 184 mm - 2.1kW/3.7kW
Bridge zones	2



MODELS

NIKOLATESLA UNPLUGGED Black Duct-out	PRF0184546
NIKOLATESLA UNPLUGGED Black Re-circulating	PRF0184019
NIKOLATESLA UNPLUGGED Black and stainless steel Duct-out	PRF0184547
NIKOLATESLA UNPLUGGED Black and stainless steel Re-circulating	PRF0184545

* Not used for Duct-out hoods

Available November 2022

EXTRACTOR

	Duct-out	Re-circulating
Controls	Individual touch control	Individual touch control
Speeds	9 plus boost	9 plus boost
Booster airflow	630	550
Airflow speed	5.1 m/s	5.1 m/s
Noise level min-max	33-66 dBA	39-72 dBA
Total power absorption	175W	175W
Ceramic filter	*	Included

INDUCTION HOB

Controls	Touch control
Power levels	9 plus boost
Maximum power absorption	7.4 kW
Cooking zones	1 210mm x 191mm - 2.1 kW / 3 kW 2 210mm x 191mm - 2.1 kW / 3 kW 3 210mm x 191mm - 2.1 kW / 3 kW 4 210mm x 191mm - 2.1 kW / 3 kW
Bridge zones	2



MODELS

NIKOLATESLA SWITCH GLOW Black Duct-out	PRF0183880
NIKOLATESLA SWITCH GLOW Black Re-circulating	PRF0183878


* Not used for Duct-out hoods

EXTRACTOR

	Duct-out	Re-circulating
Controls	Individual touch control	Individual touch control
Speeds	9 plus boost	9 plus boost
Booster airflow	630	550
Airflow speed	5.1 m/s	5.1 m/s
Noise level min-max	33-66 dBA	39-72 dBA
Total power absorption	175W	175W
Ceramic filter	*	Included

INDUCTION HOB

Controls	Touch control
Power levels	9 plus boost
Maximum power absorption	7.4 kW
Cooking zones	1 210mm x 191mm - 2.1 kW / 3 kW 2 210mm x 191mm - 2.1 kW / 3 kW 3 210mm x 191mm - 2.1 kW / 3 kW 4 210mm x 191mm - 2.1 kW / 3 kW
Bridge zones	2




MODELS

NIKOLATESLA SWITCH Black Duct-out	PRF0146212A
NIKOLATESLA SWITCH Black Re-circulating	PRF0146210A
NIKOLATESLA SWITCH White Duct-out	PRF0146216A
NIKOLATESLA SWITCH White Re-circulating	PRF0146213A

* Not used for Duct-out hoods

NIKOLATESLA ONE

SIZE	83 x 51.5 x 21cm
CUT OUT SIZE	80.7 x 49.2cm
VERSIONS	Duct-out and Re-circulating Black Glass

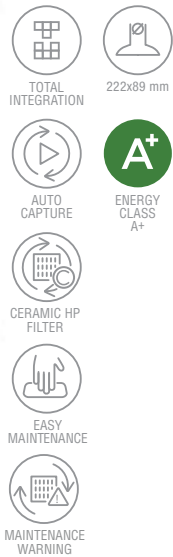

EXTRACTOR		
	Duct-out	Re-circulating
Controls	Circular touch control	Circular touch control
Speeds	9 plus boost	9 plus boost
Booster airflow	640	545
Airflow speed	5.1 m/s	5.1 m/s
Noise level min-max	34-66 dBA	40-72 dBA
Total power absorption	175 W	175 W
Ceramic filter	*	Included

INDUCTION HOB	
Controls	Touch control
Power levels	9 plus boost
Maximum power absorption	7.4 kW
Cooking zones	1 210mm x 191mm - 1.65kW / 1.85 kW 2 210mm x 191mm - 2.1 kW / 3.0 kW 3 Ø 200mm - 2.3 kW / 3.0 kW 4 Ø 160mm - 1.2 kW / 1.4 kW
Bridge zones	1 Left



MODELS	
NIKOLATESLA ONE Black Duct-out	PRF0120977
NIKOLATESLA ONE Black Re-circulating	PRF0120978

* Not used for Duct-out hoods

NIKOLATESLA LIBRA


SIZE	83 x 51.5 x 21cm
CUT OUT SIZE	80.7 x 49.2cm
VERSIONS	Duct-out and Re-circulating Black Glass, White Glass



LIBRA BLACK GLASS



LIBRA WHITE GLASS

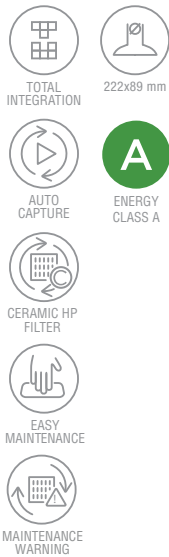

EXTRACTOR		
	Duct-out	Re-circulating
Controls	Touch control	Touch control
Speeds	3 plus 2 boost	3 plus 2 boost
Booster airflow	610	545
Airflow speed	5.1 m/s	5.1 m/s
Noise level min-max	46-69 dBA	48-71 dBA
Total power absorption	250 W	250 W
Ceramic filter	*	Included

INDUCTION HOB	
Controls	Touch control
Power levels	9 plus boost
Maximum power absorption	7.4 kW
Cooking zones	1 210mm x 191mm - 1.65kW / 1.85 kW 2 210mm x 191mm - 2.1kW / 3.0kW 3 210mm x 191mm - 2.1kW / 3.0kW 4 210mm x 191mm - 1.65kW / 1.85 kW
Bridge zones	2



MODELS		
NIKOLATESLA LIBRA Black Duct-out		PRF0147744
NIKOLATESLA LIBRA Black Re-circulating		PRF0147745
NIKOLATESLA LIBRA White Duct-out		PRF0147774
NIKOLATESLA LIBRA White Re-circulating		PRF0147775

* Not used for Duct-out hoods

NIKOLATESLA PRIME
NIKOLATESLA PRIME PLUS

SIZE	83 x 51.5 x 21cm	VERSIONS	Duct-out, Re-circulating
CUT OUT SIZE	80.7 x 49.2cm		Black Glass



NIKOLATESLA PRIME




NIKOLATESLA PRIME PLUS



EXTRACTOR		
	Duct-out	Re-circulating
Controls	Touch control	Touch control
Speeds	3 plus 2 boost	3 plus 2 boost
Booster airflow	610	550
Airflow speed	5.1 m/s	5.1 m/s
Noise level min-max	43-61 dBA	53-68 dBA
Total power absorption	310 W	310 W
Ceramic filter	*	Included

INDUCTION HOB	
Controls	Touch control
Power levels	9 plus boost
Maximum power absorption	7.4 kW
Cooking zones	2 (1.2kW / 1.4kW)- Ø 160mm 2 (2.3kW / 3kW) - Ø 200mm
Bridge zones	1 Left (Prime Plus)



MODELS		
NIKOLATESLA PRIME Black Duct-out		PRF0138475A
NIKOLATESLA PRIME Black Re-circulating		PRF0143159A
NIKOLATESLA PRIME PLUS Duct-out		PRF0155873A
NIKOLATESLA PRIME PLUS Re-circulating		PRF0155874A

* Not used for Duct-out hoods

NIKOLATESLA FLAME

SIZE	88 x 51 x 21cm
CUT OUT SIZE	84 x 48.7cm
VERSIONS	Duct-out and Re-circulating Black glass + cast iron, Grey glass + cast iron



FLAME BLACK



FLAME GREY



EXTRACTOR		
	Duct-out	Re-circulating
Controls	Rotary	Rotary
Speeds	3 plus 2 boost	3 plus 2 boost
Booster airflow	600	530
Airflow speed	5.1 m/s	5.1 m/s
Noise level min-max	45-63 dBA	49-69 dBA
Total power absorption	250 W	250 W
Ceramic filter	*	Included

GAS HOB	
Controls	Rotary
Total power gas	10.8 kW
Cooking zones	1 Semi-rapid 1.75 kW 2 Dual special 3.5 kW 3 Rapid 3 kW 4 Semi-rapid 1.75 kW




MODELS		
NIKOLATESLA FLAME Black Duct-out		PRF0147740A
NIKOLATESLA FLAME Black Re-circulating		PRF0147741A
NIKOLATESLA FLAME Grey Duct-out		PRF0147742A
NIKOLATESLA FLAME Grey Re-circulating		PRF0147743A

* Not used for Duct-out hoods

NEW

NIKOLATESLA FIT XL

SIZE	83 x 51.5 x 25cm
CUT OUT SIZE	75 x 49cm
VERSIONS	Duct-out – Re-circulating with optional kit Black Glass

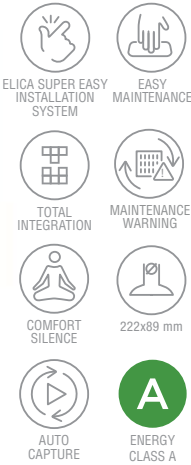

NIKOLATESLA FIT


SIZE	60 x 51.5 x 25cm, 72 x 51.5 x 25cm
CUT OUT SIZE	56 x 49cm
VERSIONS	Duct-out – Re-circulating with optional kit Black Glass



60 CM



72 CM

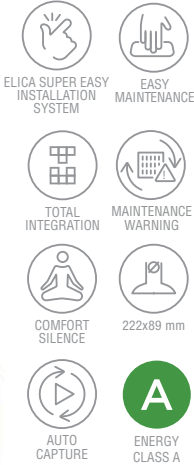

EXTRACTOR		
	Duct-out	Re-circulating
Controls	Touch control	Touch control
Speeds	4 plus boost	4 plus boost
Booster airflow	620	520
Airflow speed	5.1 m/s	5.1 m/s
Noise level min-max	43-61 dBA	44-68 dBA
Total power absorption	160 W	160 W

EXTRACTOR		
	Duct-out	Re-circulating
Controls	Touch control	Touch control
Speeds	4 plus boost	4 plus boost
Booster airflow	620	580
Airflow speed	5.1 m/s	5.1 m/s
Noise level min-max	37-61 dBA	48-69 dBA
Total power absorption	160 W	160 W

INDUCTION HOB	
Controls	Touch control
Power levels	9 plus boost
Maximum power absorption	7.4 kW
Cooking zones	1 210mm x 191mm - 1.65kW / 1.85 kW
	2 210mm x 191mm - 2.1 kW / 3.0 kW
	3 210mm x 191mm - 2.1 kW / 3.0 kW
	4 210mm x 191mm - 1.65 kW / 1.85 kW
Bridge zones	2

INDUCTION HOB	
Controls	Touch control
Power levels	9 plus boost
Maximum power absorption	7.4 kW
Cooking zones	1 210mm x 191mm - 2.1 kW / 3.0 kW
	2 210mm x 191mm - 1.65 kW / 1.85 kW
	3 Ø 200mm - 2.3 kW / 3.0 kW
	4 Ø 160mm - 1.2 kW / 1.4 kW
Bridge zones	1 Left



MODELS	
NIKOLATESLA FIT XL Black Duct-out	PRF0179476

MODELS	
NIKOLATESLA FIT 60 Black Duct-out	PRF0167053
NIKOLATESLA FIT 70 Black Duct-out	PRF0167054

NEW

NIKOLATESLA FIT 3Z


SIZE	60 x 51.5 x 26cm, 72 x 51.5 x 26cm
CUT OUT SIZE	56 x 49cm
VERSIONS	Duct-out – Re-circulating with optional kit Black Glass



60 CM



72 CM

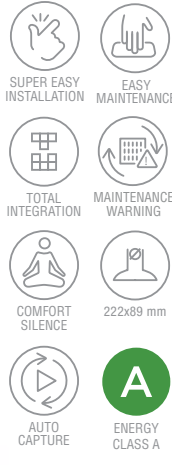

EXTRACTOR		
	Duct-out	Re-circulating
Controls	Touch control	Touch control
Speeds	4 plus boost	4 plus boost
Booster airflow	600	490
Airflow speed	5.1 m/s	5.1 m/s
Noise level min-max	42-61 dBA	52-68 dBA
Total power absorption	160 W	160 W

INDUCTION HOB	
Controls	Touch control
Power levels	9 plus boost
Maximum power absorption	7.4 kW
Cooking zones	1 Ø 300mm - 2.5kW / 3.6 kW
	2 Ø 140mm - 0.9 kW / 1.35 kW
	3 Ø 180mm -1.4 kW / 2.1 kW




MODELS	
NIKOLATESLA FIT 3Z 60 Black Duct-out	tba
NIKOLATESLA FIT 3Z 70 Black Duct-out	tba

NEW

NIKOLATESLA ALPHA

SIZE	78 x 51,5 x 25cm
CUT OUT SIZE	75 x 49cm
VERSIONS	Duct-out / Re-circulating with optional kit Black Glass

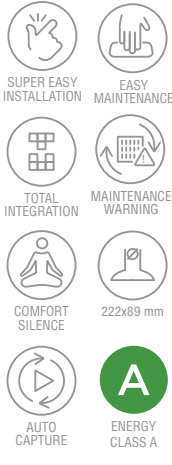

EXTRACTOR		
	Duct-out	Re-circulating
Controls	Touch control	Touch control
Speeds	4 plus boost	4 plus boost
Booster airflow	580	475
Airflow speed	5.1 m/s	5.1 m/s
Noise level min-max	43-61 dBA	47-67 dBA
Total power absorption	160 W	160 W

INDUCTION HOB	
Controls	Touch control
Power levels	9 plus boost
Maximum power absorption	7.4 kW
Cooking zones	1 Ø 160mm - 1.2kW / 1.4 kW
	2 Ø 200mm - 2.3 kW / 3.0 kW
	2 Ø 200mm - 2.3 kW / 3.0 kW
	3 Ø 160mm - 1.2 kW / 1.4 kW



MODELS	
NIKOLATESLA ALPHA Black Duct-out	PRF0183127

Available November 2022

Available January 2023

* Not used for Duct-out hoods
Available November 2022

MAXIMUM INSTALLATION FLEXIBILITY

Elica wanted their NikolaTesla extractor-hobs to have greatest possible installation flexibility so they designed two different platforms in order to meet all installation requirements. This guide explains the basic differences between the two platforms and which models use each one , so you can decide which will best suit your kitchen.

NIKOLATESLA FIT, FIT XL, FIT 3Z, ALPHA

The compact system is the latest and most flexible allowing great versatility when installing the product in the duct-out mode and the choice of three conversion kits continues this flexibility for installation in re-circulating mode.

NIKOLATESLA UNPLUGGED, PRIME, PRIME PLUS SWITCH GLOW, SWITCH, ONE HP, ONE, LIBRA, FLAME

Products using this platform are available in duct out or re-circulating versions. The most common basic ducting used for standard installation of each model is included with each product.

	AVAILABLE IN	DUCTING INCLUDED	RE-CIRCULATING MODE CONVERSION KIT	HEIGHT
NIKOLATESLA FIT	Duct-out	---	PLINTH IN / PLINTH OUT / BACK OUTLET	25 cm
NEW NIKOLATESLA FIT XL	Duct-out	---	PLINTH IN / PLINTH OUT / BACK OUTLET	25 cm
NEW NIKOLATESLA FIT 3Z	Duct-out	---	PLINTH IN / PLINTH OUT / BACK OUTLET	25 cm
NEW NIKOLATESLA ALPHA	Duct-out	---	PLINTH IN / PLINTH OUT / BACK OUTLET	25 cm
NIKOLATESLA PRIME NIKOLATESLA PRIME PLUS	Duct-out	✓	---	21 cm
	Re-circulating	✓ (PLINTH OUT)	---	
NEW NIKOLATESLA UNPLUGGED	Duct-out	✓	---	21 cm
	Re-circulating	✓ (PLINTH OUT)	---	
NEW NIKOLATESLA SWITCH GLOW	Duct-out	✓	---	21 cm
	Re-circulating	✓ (PLINTH OUT)	---	
NIKOLATESLA SWITCH	Duct-out	✓	---	21 cm
	Re-circulating	✓ (PLINTH OUT)	---	
NIKOLATESLA ONE HP NIKOLATESLA ONE	Duct-out	✓	KIT0130427A	21 cm
	Re-circulating	✓ (PLINTH OUT)	---	
NIKOLATESLA LIBRA	Duct-out	✓	KIT0130427A	21 cm
	Re-circulating	✓ (PLINTH OUT)	---	
NIKOLATESLA FLAME	Duct-out	✓	KIT0130427A	21 cm
	Re-circulating	✓ (PLINTH OUT)	---	

NIKOLATESLA FIT | FIT XL | FIT 3Z | ALPHA



▶ INSTALLATION VIDEO

NikolaTesla models with this platform provide great installation flexibility. Installing the extractor-hob in duct-out mode ensures the highest efficiency and quietest operation. Choose the exact ducting required from the range of ducting available from Elica – see page 13 for details.

If you need your extractor-hob to be re-circulating Elica has designed 3 different kits that convert the product to the re-circulating mode. Choose whichever suits your installation requirements best.



Rear outlet



Side outlet (right or left)



Installation "PLINTH IN"



Installation "PLINTH OUT"



Installation "REAR OUTLET"

KIT0167756 | RE-CIRCULATING INSTALLATION KIT UNDER PLINTH (MINIMUM HEIGHT 6CM) "PLINTH IN"

If the product is supplied in duct-out mode, this kit will allow it to be installed in re-circulating (filtering) mode. The filtered air will be conveyed into the cabinet base. To minimise condensation when using this kit ensure there is adequate ventilation or use the PLINTH OUT kit on page 10.

A chrome-plated trim profile is provided for any vent slot made in the plinth.



- Ceramic filters (2 pieces)
- 90° - 94 x 227 mm rectangular bend
- 500 x 94 x 227 mm rectangular pipe
- 90° rectangular bend from vertical 94 x 227 mm to horizontal 55 x 227 mm
- Under baseboard deflector
- Chrome-plated trim profile
- Adhesive Tape

KIT0167757 | RE-CIRCULATING INSTALLATION KIT UNDER PLINTH (MINIMUM HEIGHT 6CM) “PLINTH OUT”

This kit is similar to KIT0167756 but is designed to exhaust the filtered air through ducting directly to an outlet in the plinth.



- Ceramic filters, 2 pieces
- 90° - 94 x 227 mm rectangular bend
- 500 x 94 x 227 mm rectangular pipe
- 90° rectangular bend from vertical 94 x 227 mm to horizontal 50 x 227 mm
- Outlet connection to be fitted outside the plinth with chrome-plated trim profile
- 218 x 55 x 300 mm rectangular pipe
- Outlet connection support
- Adhesive tape



KIT0180522 | RE-CIRCULATING INSTALLATION KIT “BACK OUTLET”

This kit allows the product to be converted into re-circulating mode but the air flow is conveyed backwards and to the left, in the simplest possible way, into the space between the wall and the cabinet without the use of any additional pipes.



- Ceramic filters, 2 pieces
- Telescopic outlet connection
- Chrome-plated trim profile

NIKOLATESLA UNPLUGGED | PRIME | PRIME PLUS | SWITCH GLOW | SWITCH | ONE HP | ONE | LIBRA | FLAME

This platform has also been designed to guarantee maximum installation flexibility by optimising the use of space inside the cabinet. NikolaTesla models with this platform can be purchased both in duct-out and re-circulating (filtering) versions. In both cases the product is supplied ‘ready’ for standard installation. A wide range of additional ducting is available – see page 13 for details.

RE-CIRCULATING MODE

INSTALLATION VIDEO



The re-circulating (filtering) versions include everything needed for standard installation ducted to an outlet in the plinth including the exclusive chrome-plated trim profile to finish outlet.

Example of re-circulating mode configuration with a deep cabinet



If the re-circulating version product code has been purchased , the packaging will contain everything needed to install NikolaTesla with a ducted outlet to the cabinet baseboard, including the exclusive chrome-plated trim profile to finish the baseboard cut, necessary for air outlet.


In the box (re-circulating mode PLINTH OUT)



- Ceramic filters (3 pieces)
- Ceramic filter frame assembly
- 90° - 94 x 227 mm Rectangular bend
- 90° rectangular bend from vertical 94 x 227 mm to horizontal 50 x 227 mm
- 500 x 94 x 227 mm rectangular pipe
- 218 x 55 x 300 mm rectangular pipe
- Outlet connection to fit outside the baseboard, provided with chrome-plated trim profile
- 2 extension connections for >60 and >65 cabinet
- Outlet connection supports
- Adhesive tape

KIT0140820 | RE-CIRCULATING MODE KIT FOR DEEP CABINETS

In the case of installation in kitchen cabinets deeper than standard Elica provides a kit to move the piping as far back as required in order to maximize drawer capacity.

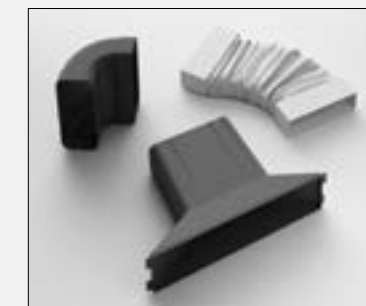

Available for models NIKOLATESLA ONE/ONE HP/SWITCH GLOW/SWITCH/UNPLUGGED/ LIBRA/FLAME/PRIME/PRIME PLUS

- Extension connection for > 70 cm cabinet
- 90° - 94 x 227 mm rectangular bend
- 218 x 55 mm flexible connection
- Extension connection for > 70 cm cabinet
- 90° - 94 x 227 mm rectangular bend
- 218 x 55 mm flexible connection



Example of re-circulating mode configuration with deep cabinet

DUCT-OUT VERSION

In the box (duct-out version)



- Rear outlet connection
- 90° - 94 x 227 mm rectangular bend
- 15° connection (4 pieces)
- 500 x 94 x 227 mm rectangular pipe

If the duct out version has been purchased it will contain ducting to install the product in this mode. Any additional ducting required to connect to the outside outlet can be purchased separately.



INSTALLATION VIDEO



Example of duct out mode configuration with lateral outlet



Example of duct out mode configuration with rear outlet

Installation in duct out mode to an outlet in the rear wall is also possible using optional ducting.

KIT0130427A | RE-CIRCULATING MODE CONVERSION KIT

This kit enables you to convert a NikolaTesla supplied with the duct out version of this platform to a re-circulating (filtering) mode.



- Ceramic filters, 3 pieces
- Ceramic filter frame assembly
- Ceramic filter tray
- 90° - 94 x 227 mm rectangular bend
- 90° rectangular bend from vertical 94 x 227 mm to horizontal 50 x 227 mm
- 500 x 94 x 227 mm rectangular pipe
- 218 x 55 x 300 mm rectangular pipe
- Outlet connection to be fitted outside the baseboard, provided with chrome-plated trim profile
- 2 extension connections for >60 and >65 cabinet
- Outlet connection support
- Adhesive tape

DUCTING FOR DUCT-OUT VERSION



222x89x1000 mm
KIT0120991



222x89x500 mm
KIT0173527



Ø150x500 mm
KIT0120996



Ø150x1000mm
KIT0121000



227x94x80mm
KIT0121001



15° 227x138x94
KIT0121002



Ø158x59mm
KIT0121003



90° 227x288x94mm
KIT0121004



90° 227x94mm
KIT0121005




90° - Ø157
KIT0121006



227x94 - Ø146mm
KIT0121007



227x94 - Ø153mm
KIT0121008



int 216x82
est 290x160 mm
KIT0121009



190x190 - Ø147mm
KIT0121010



227x94 mm
KIT0126810



50 mm x 25 m
KIT0161453

DUCTING FOR RE-CIRCULATING VERSION



218x55x500 mm
KIT0121012



218x55x1000 mm
KIT0121013



218x55x70 mm
KIT0121015



90° 218x55 mm
KIT0121016



218x55 mm
KIT0121017



50 mm x 25 m
KIT0161453



Deflector
under plinth
KIT0168750

CERAMIC ODOUR FILTER

The ceramic filter is a modular filter that can be thermally regenerated in the oven every 2/3 months at 200° for 45 minutes for up to 5 years. It offers for very high odour absorption efficiency and very high mechanical strength.



Use KIT0120952A for

NIKOLATESLA ONE
NIKOLATESLA ONE HP
NIKOLATESLA PRIME
NIKOLATESLA PRIME PLUS
NIKOLATESLA UNPLUGGED
NIKOLATESLA SWITCH GLOW
NIKOLATESLA SWITCH
NIKOLATESLA LIBRA
NIKOLATESLA FLAME



Use KIT0167755 for

NIKOLATESLA FIT
NIKOLATESLA FIT XL
NIKOLATESLA 3Z
NIKOLATESLA ALPHA

NIKOLATESLA DESIGN AWARDS



REALIZED BY ELICA TEAM
BARBARA PERSIGILLI
FRANCESCA POETA
Graphic Design
and Coordination

IN COLLABORATION WITH

ARCHÈ AGENCY - PESARO
Scenic Art Direction
Photorealistic 3D

This catalogue is of exclusive property of Elica spa.
All rights are reserved. Any form of total or partial reproduction of catalogue is strictly forbidden.
The printing process does not always permit a faithful reproduction of tones and materials.
Elica reserves the right to modify the specifications and design of all products in this catalogue.

FREE SAMPLE

D R Kitchen Appliances Ltd
2 Alpha Road, Aldershot
Hampshire GU12 4RG
t: 01252 351111
e: sales@drcookerhoods.co.uk

www.elica.co.uk

Twitter: @elicahoods
Facebook: elicacookerhoods
Pinterest: elica hoods
Houzz

elica.com

