
## **OPERATION INSTRUCTIONS**

1./2. Put strap around the package.

Insert strap into the buckle and tighten strap by hand.

- 3. Take the tensioner by the right hand and depress tension lever. Place strap under the gripper so that it touches the housing with the right hand edge. Release tension lever.
- 4. Insert the upper strap into the slot of the cutter mechanism and the windlass. Hold the tool and strap with your left hand and move the tension lever forth and back until the strap is tensioned.
- 5. Depress the tension lever from the tensioner completely until the strap is cut. Pivot the tensioner away from the strap.

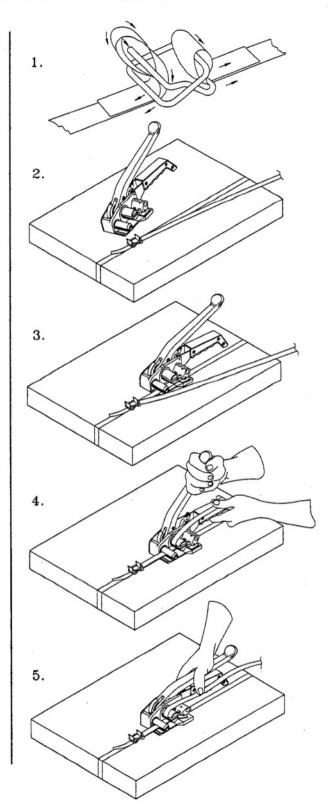

## MAINTENANCE INSTRUCTIONS

- PERIODICALLY LUBRICATE ALL MOVING PARTS WITH ONE OR TWO DROPS OF LIGHT MACHINE OIL.
- CLEAN CLAMP OF ANY DIRT OR STRAP RESIDUE DAILY.

## SAFETY INSTRUCTIONS

- 1. THIS TOOL WAS DESIGNED AND MANUFACTURED FOR SAFE HANDLING DURING THE STRAPPING OPERATION. FOR EFFECTIVE SERVICE, PLEASE READ AND FOLLOW ALL SAFETY, MAINTENANCE AND OPERATING INSTRUCTIONS.
- ALWAYS WEAR EYE, FACE, AND HAND PROTECTION WHEN OPERATING THIS TOOL.
- 3. DO NOT PUT HANDS OR OTHER PARTS OF THE BODY
  -BETWEEN THE STRAP AND THE PACKAGE.
- 4. WHEN CUTTING THE STRAP, HOLD THE UPPER PORTION AND STAND AT A SAFE DISTANCE AWAY FROM THE STRAP. EXERT CAUTION, AS THE LOWER STRAP WILL SNAP FORWARD.
- DO NOT STAND IN LINE WITH THE STRAP WHILE IT IS BEING TENSIONED. THE STRAP COULD BREAK IF OVER TENSIONED.
- 6. USE ONLY ORIGINAL REPLACEMENT PARTS.

READY TO USE.

## **ADJUSTMENTS (For H-26)**

BEFORE USING YOUR NEW H-26 TOOL, PLEASE ADJUST FOR THE CORRECT THICKNESS OF STRAPPING. NOTE THAT DAMAGE COULD RESULT TO THE TOOL IF THIS INSTRUCTION IS NOT FOLLOWED.

PLACE A SAMPLE OF YOUR STRAPPING IN THE TOOL AND TENSION AROUND AN OBJECT UNTIL THE STRAP IS AT THE DESIRED TENSION LEVEL. THEN TIGHTEN HSS0510 SET SCREW UNTIL IT LIGHTLY CONTACTS THE H26-013 CLAMP ARM.

REMOVE THE TOOL BY COMPLETELY PUSHING DOWN ON THE HANDLE AND WITHDRAWING TO THE RIGHT. THE TOOL IS NOW

IF ANOTHER THICKNESS OF STRAP IS SUBSTITUTED, THE ABOVE ADJUSTMENTS SHOULD BE REPEATED.

