

Description

In-line filter fitting

SAE -06 female to SAE-06 male

50 micron screen with progressive long life element


Features

Protects components at point of use

Element is burst tested to 4000 psi so it will not open up if plugged

Zinc plated steel fitting

Other filters available

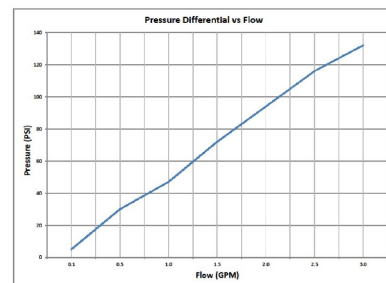

Specifications

Maximum Operating Pressure: 4000 psi

Nominal Flow Capacity: 3 gpm

Operating Temperature: -40 °F to 210 °F

Fluids: Mineral-based hydraulic fluids

