


Description

Pressure Compensated Flow Control
 Designed for lower flow settings
 Less susceptible to fluctuation due to temperature

Features

Pressure compensated
 Adjustment range: 25% from specified flow

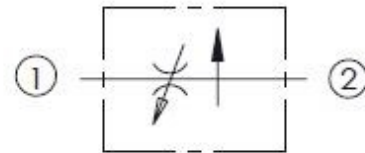

Specifications

Maximum Operating Pressure: 3500 psi
 Nominal Flow Capacity: 2 gpm
 Operating Temperature: -40 °F to 210 °F
 Fluids: Mineral-based or synthetic hydraulic fluids
 Cavity: Common Cavity C08-2
 Installation torque: 20 ft-lbs

