


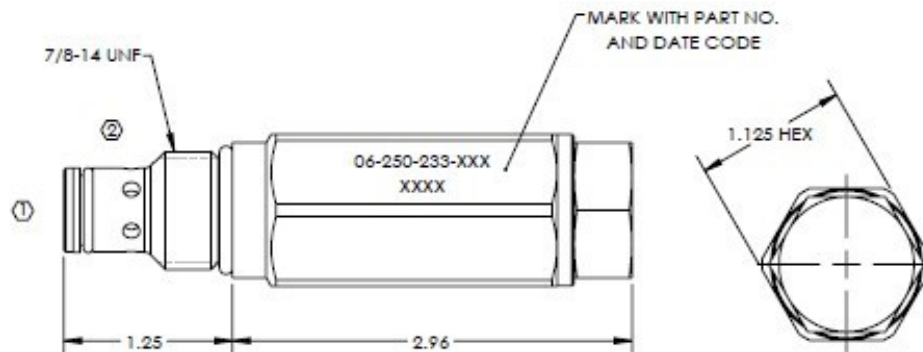


Description

Thermally-actuated, normally open, spool type
Shifts on to off at a specified temperature
Excellent for controlling temperature-required circuits

Features

Actuation temp options: 80 °F, 120 °F, 150 °F
Plated alloy steel and hardened spool for long life
Operating Pressure:
Inlet port 1: 500 psi
Outlet port 2: 3000 psi

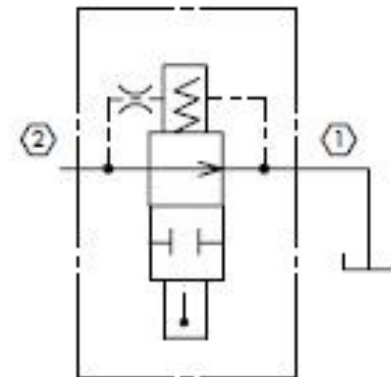

Specifications

Maximum Operating Pressure: 3000 psi
Nominal Flow Capacity: 12 gpm
Operating Temperature: -40 °F to 210 °F
Fluids: Mineral-based hydraulic fluids
Cavity: Common cavity: C10-2

