


Description

In-line hydraulic check valve with orifice
 JIC-10 female 37 flare to 1.00 beaded hose barb

Features

- Steel body and poppet
- Spring options for various crack pressures
- Ideal for use as a back pressure valve

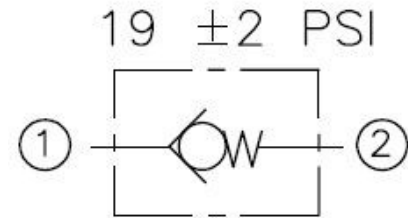

Specifications

- Maximum Operating Pressure: 100 psi
- Nominal Flow Capacity: 25 gpm
- Operating Temperature: -40 °F to 210 °F
- Fluids: Mineral-based hydraulic fluids
- Crack Pressure: 5psi, 30psi, 60psi based on spring options

