


# TN26K500M-66P

Crimpen

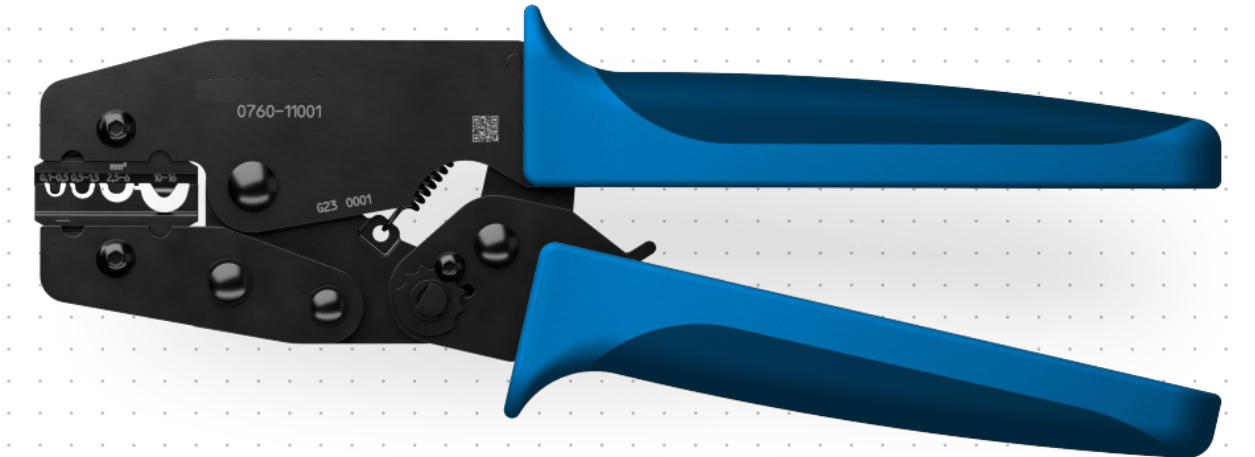

## This tool is made for these applications

Non-insulated cable lugs with closed crimp sleeve to DIN 46234 | 46230 | 46341 and tubular cable lugs up to 10 mm<sup>2</sup>

## That is particularly

The right solution for every application - with a basic tool and changeable crimp dies.

Maximum flexibility. With a large selection of dies, you can respond to new challenges at short notice.

Customized design of tool kits for your daily work is possible.

Benefit from the price advantage of changeable dies.

## These functions make crimping more convenient

Locator, for maximum application safety, available as an option.

Tool-free replacement of the dies? Available as an additional tool version.

Safe storage of two crimping dies in the tool handle? Available as an additional tool version.

Tool lies comfortably in the hand thanks to soft handles with anti-slip protection.

## Further advantages offered by our Made in Germany standard

The integrated guide makes the replacement of dies fast, error-free and always delivers reliable crimping results.

Always a compliant crimp - the positive lock ensures this. Can be unlocked in the event of incorrect operation.

Manufactured from special steel, specially hardened and tempered parts - quality that lasts.

No unnecessary play within the individual parts thanks to precise manufacturing, resulting in maximum reliability.

Tool is optimally set at the factory. It is not possible or necessary to adjust the crimping force.

## Technical Data

<b>Crimping range</b>	0,1 to 0,5 mm <sup>2</sup> 0,5 to 1,5 mm <sup>2</sup> 2,5 to 6,0 mm <sup>2</sup> 10,0 to 16,0 mm <sup>2</sup>
<b>Crimp shape</b>	Dorn
<b>Dimensions (length x width)</b>	approx. 220 mm x 80 mm
<b>Weight</b>	approx. 525 g