




TEMPORARY BASKET STRAINERS

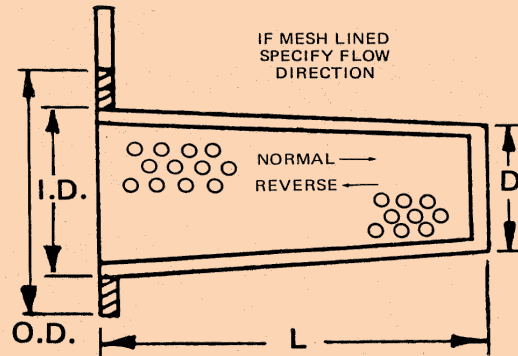

MODEL "B" CARBON STEEL
MODEL "BS" STAINLESS STEEL
BASKET TYPE

NOM. PIPE SIZE	ID	OD 150/300# ANSI	OD 600# ANSI	OD 900# ANSI	OD 1500# ANSI	D	BASKET TYPE WITH 1/8" PERF ON 3/16" CENTERS		
							L=100%	L=150%	L=200%
3/4"	5/8	2 1/8	2 1/2	2 5/8	2 5/8	3/8	2	2 1/2	3
1"	3/4	2 1/2	2 3/4	3	3	1/2	2	2 1/2	3
1 1/2"	1 1/4	3 1/4	3 5/8	3 3/4	3 3/4	3/4	2 3/4	3	3 1/2
2"	1 3/4	4	4 1/4	5 1/2	5 1/2	1	3	3 1/2	4
2 1/2"	2 1/4	4 3/4	5	6 3/8	6 3/8	1 1/4	3 3/16	4	4 1/2
3"	2 3/4	5 1/4	5 3/4	6 1/2	6 3/4	1 1/2	3 1/2	3 7/8	5 1/2
4"	3 3/4	6 3/4	7 1/2	8	8 1/8	2	4	5	7
5"	4 5/8	7 5/8	9 3/8	9 5/8	9 7/8	2 1/2	5	6 3/8	9
6"	5 3/8	8 5/8	10 3/8	11 1/4	11	3	6	7 3/4	11
8"	7 3/8	10 7/8	12 1/2	14	13 3/4	4	6 1/8	9 3/4	14
10"	9 3/8	13 1/4	15 5/8	17	17	5	7 1/2	12 3/8	18
12"	11	16	17 7/8	19 1/2	20 3/8	6	9	14 3/4	20
14"	12 1/4	17 3/8	19	20 3/8	22 5/8	7	10	15 7/8	21
16"	14	20 1/8	21 7/8	22 1/2	-	8	10	18 3/8	23
18"	15 3/4	21 1/4	23 3/4	25	-	9	12	20 7/8	27
20"	17 1/2	23 1/2	26 5/8	-	-	10	14	23 1/2	31
24"	21 1/4	27 7/8	30 7/8	-	-	12	16	28 3/8	37

ALL DIMENSIONS IN INCHES - LARGER SIZES AVAILABLE

SPECIFY ID OF PIPE IF NOT STANDARD WEIGHT

% OPEN AREA DOES NOT INCLUDE MESH LINING. CONSULT US FOR ACTUAL LENGTH NEEDED WITH MESH FOR % OPEN
Normally supplied with 1/8" diameter holes on 3/16" centers. Available in most sizes with perforation & mesh.

Carbon Steel, Stainless Steel and other Alloys available.

For Ring Type Joint (RTJ), Specify Ring Number or size and pressure class.

If mesh lined, specify flow direction. Normal Flow: Mesh is inside. Reverse Flow: Mesh is outside

Standard ring thickness is 1/8" (11 ga) with mill finish. Thicker rings with mill or serrated finish available

FABROTECH INDUSTRIES, INC.

2089 NINTH AVENUE, RONKONKOMA, NEW YORK 11779

TEL: (631) 467-2040 FAX: (631) 467-2196 e-mail: info@fabrotech.com

www.fabrotech.com