


Frame Color Selections


Standard Metal Building
Main Frame Color:

Red/Brown Oxide Primed




Metal Building Main
Frame Color:

Gray Oxide Primed

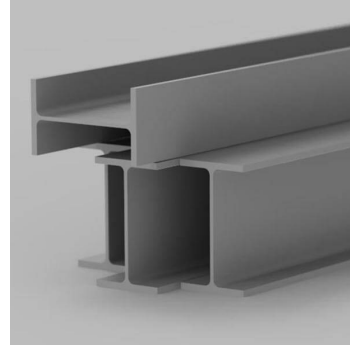

Longest Lasting Premium Metal Building Main
Frame Color:

Hot-Dip Galvanized

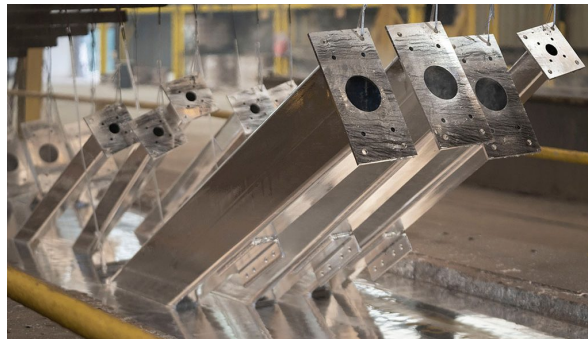

Standard Metal Building
Secondary Frame Color:

Red/Brown Oxide Primed



Premium Metal Building
Secondary Frame Color:

Pre-Galvanized



Panel & Trim Color Selections

SHERWIN-WILLIAMS® WEATHERXL™ SILICON MODIFIED POLYESTER (SMP) COATING SYSTEM



Polar White PPOL^{*/**}



Light Stone^{**}



Ash Gray^{**}



Desert Sand



Charcoal Gray



Burnished Slate



Saddle Tan^{**}




Hawaiian Blue



Rustic Red



Fern Green



Solar White



Koko Brown



Evergreen



Aztec Gold



Crimson Red



Colony Green



Burgundy



Coal Black

SHERWIN-WILLIAMS® FLUROPON® 70% PVDF COATING SYSTEM



Regal Red



Gallery Blue



Medium Bronze



Snow White



Slate Gray



Almond




Classic Green



Brownstone



Colonial Red



Bone White



Midnight Bronze

These color samples are as close as possible to the actual colors offered within the limitations of color-chip reproduction.

** Polar White is a premium polyester product (PPOL) not WeatherXL™.*

*** Color also available in economical Commodity Polyester.*



*All colors are
Energy Star® certified.*

Panel Profiles

Profile	29 Gauge		26 Gauge				24 Gauge			22 Gauge	
	Galvalume®	PPOL	Galvalume®	WeatherXL™	Commodity	Fluropon®	Galvalume®	WeatherXL™	Fluropon®	Galvalume®	PPOL
PBR			•	•		•	•	1	•	•	5
R	•				•						
PBU			•	•		•	•	1	•	•	5
U	•				•						
A			•	•		•	•	1	•	•	5
SBS-369	•	6	•	•	•	•					
TS-324							•	2			
VS-216							•	2	•		
SL-11/SL-12							4	3	4		

1. Available in Polar White and Solar White only.










2. Available in Solar White only.

3. SL-12 Available in Polar White only.

4. SL-11 Available in Fluropon® or Galvalume® only.

5. Inquire for Polar White.

6. Polar White only.

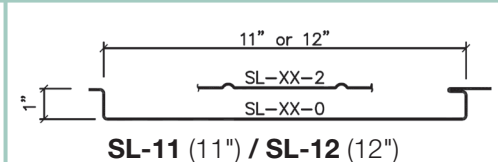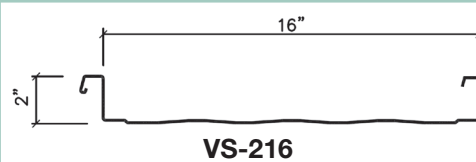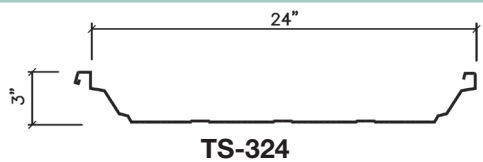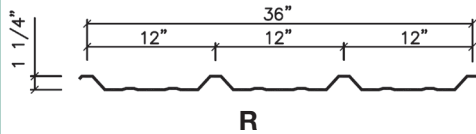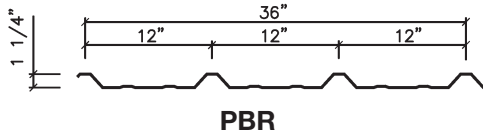


Fluropon® and WeatherXL™ are a registered trademark of The Sherwin-Williams® Company.
Galvalume® is a registered trademark of BIEC International, Inc.
© SBS All rights reserved.

WeatherXL™ & PPOL colors carry a 40-Year Limited Paint Warranty.
Fluropon® colors carry a 35-Year Limited Paint Warranty.
Commodity Polyester colors carry a 15-Year Limited Paint Warranty.

SHERWIN-WILLIAMS
Coil Coatings

Light Transmitting Panel Options

LIGHT TRANSMITTING PANELS

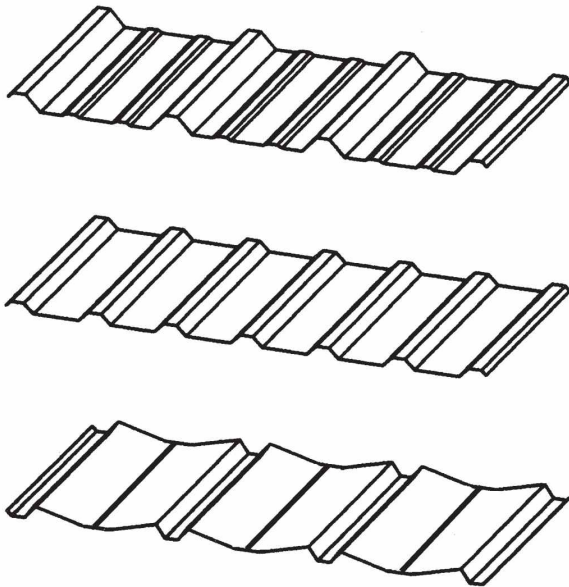

WARNING: These light transmitting panels are not designed or intended to bear the weight of any person walking, stepping, standing, or resting on them. Rodzina Building Systems **DISCLAIMS ANY WARRANTY OR REPRESENTATION, EXPRESSED OR IMPLIED**, that any person can safely walk, step, stand, or rest on or near these light transmitting panels or they comply with any OSHA regulation.

TYPE	COLOR	LENGTH	WT/EA
------	-------	--------	-------

ACRYLIT HIGH-STRENGTH

Acrylit Premium Resin, anti-yellowing, High Strength light transmitting panel. Woven fiberglass mat in each panel for maximum tear resistance. Nominal weight of 8 oz. per square foot with 77% light transmission.

10-Year Performance Warranty

R Panel	White	10'-8"	17.5#
R Panel	White	12'-0"	19.0#
U Panel	White	10'-8"	17.5#

ACRYLIT CHOPPED-GLASS

Acrylit Premium Resin, anti-yellowing, chopped glass, light transmitting panel. Nominal weight of 8 oz. per square foot with 77% light transmission.

10-Year Performance Warranty

R Panel	White	12'-0"	10.8#
R Panel	White	5'-4"	8.5#
A Panel	White	11'-0"	17.0#

POLYCARBONATE

Clear, polycarbonate light transmitting panels, 0.08" thickness

R	Clear	12'-0"	6.0#
---	-------	--------	------