Color Selections



These color samples are as close as possible to the actual colors offered within the limitations of color-chip reproduction.



^{*} Polar White is a premium polyester product (PPOL) not WeatherXL™.


^{**} Color also available in economical Commodity Polyester.

Panel Profiles

	29 Gauge		26 Gauge			24 Gauge			22 Gauge		
Profile	Galvalume [®]	PPOL	Galvalume [®]	WeatherXL™	Commodity	Fluropon®	Galvalume [®]	WeatherXL™	Fluropon®	Galvalume [®]	PPOL
PBR			•	•		•	•	1	•	•	5
R	•				•						
PBU			•	•		•	•	1	•	•	5
U	•				•						
А			•	•		•	•	1	•	•	5
SBS-369	•	6	•	•	•	•					
TS-324							•	2			
VS-216							•	2	•		
SL-11/SL-12							4	3	4		

- 1. Available in Polar White and Solar White only.
- 3. SL-12 Available in Polar White only.
- 5. Inquire for Polar White.

- 2. Available in Solar White only.
- 4. SL-11 Available in Fluropon® or Galvalume® only.
- 6. Polar White only.

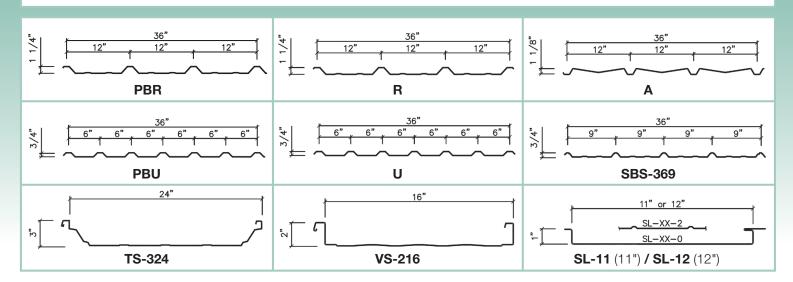


Fluropon® and WeatherXL™ are a registered trademark of The Sherwin-Williams® Company. Galvalume® is a registered trademark of BIEC International, Inc.
© SBS All rights reserved.

SHERWIN-WILLIAMS. Coil Coatings

WeatherXL™ & PPOL colors carry a 40-Year Limited Paint Warranty. Fluropon® colors carry a 35-Year Limited Paint Warranty. Commodity Polyester colors carry a 15-Year Limited Paint Warranty.

Light Transmitting Panel Options

LIGHT TRANSMITTING PANELS



WARNING: These light transmitting panels are not designed or intended to bear the weight of any person walking, stepping, standing, or resting on them. Rodzina Building Systems DISCLAIMS ANY WARRANTY OR REPRESENTATION, EXPRESSED OR IMPLIED, that any person can safely walk, step, stand, or rest on or near these light transmitting panels or they comply with any OSHA regulation.

TYPE	COLOR	LENGTH	WT/EA
111 -	OOLON	LLINGIII	V V I / L

ACRYLIT HIGH-STRENTH

Acrylit Premium Resin, anti-yellowing, High Strength light transmitting panel. Woven fiberglass mat in each panel for maximum tear resistance. Nominal weight of 8 oz. per square foot with 77% light transmission.

10-Year Performance Warranty

R Panel	White	10'-8"	17.5#
R Panel	White	12'-0"	19.0#
U Panel	White	10'-8"	17.5#

ACRYLIT CHOPPED-GLASS

Acrylit Premium Resin, anti-yellowing, chopped glass, light transmitting panel. Nominal weight of 8 oz. per square foot with 77% light transmission.

10-Year Performance Warranty

R Panel	White	12'-0"	10.8#
R Panel	White	5'-4"	8.5#
A Panel	White	11'-0"	17.0#

POLYCARBONATE

Clear, polycarbonate light transmitting panels, 0.08" thickness

12'-0" 6	.0#
	2'-0" 6.