


Frame Color Selections


Standard Metal Building
Main Frame Color:

Red/Brown Oxide Primed



Metal Building Main
Frame Color:

Gray Oxide Primed

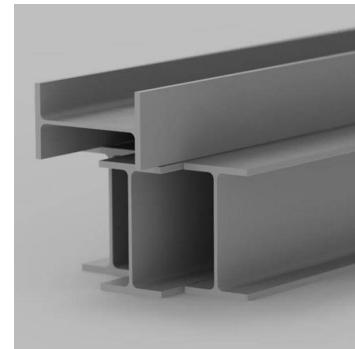

Longest Lasting Premium Metal Building Main
Frame Color:

Hot-Dip Galvanized



Standard Metal Building
Secondary Frame Color:

Red/Brown Oxide Primed





Premium Metal Building
Secondary Frame Color:

Pre-Galvanized



Panel & Trim Color Selections

SHERWIN-WILLIAMS® WEATHERXL™ SILICON MODIFIED POLYESTER (SMP) COATING SYSTEM				
				
Polar White PPOL**	Light Stone**	Ash Gray**	Desert Sand	Charcoal Gray
				
Burnished Slate	Saddle Tan**	Hawaiian Blue	Rustic Red	Fern Green
				
Solar White	Koko Brown	Evergreen	Aztec Gold	Crimson Red
				
Colony Green	Burgundy	Coal Black		
SHERWIN-WILLIAMS® FLUROPON® 70% PVDF COATING SYSTEM				
				
Regal Red	Gallery Blue	Medium Bronze	Snow White	Slate Gray
				
Almond	Classic Green	Brownstone	Colonial Red	Bone White
				
		Midnight Bronze		

These color samples are as close as possible to the actual colors offered within the limitations of color-chip reproduction.

* Polar White is a premium polyester product (PPOL) not WeatherXL™.

** Color also available in economical Commodity Polyester.



All colors are
Energy Star® certified.

Panel Profiles

Profile	29 Gauge		26 Gauge				24 Gauge			22 Gauge	
	Galvalume®	PPOL	Galvalume®	WeatherXL™	Commodity	Fluropón®	Galvalume®	WeatherXL™	Fluropón®	Galvalume®	PPOL
PBR			•	•		•	•	1	•	•	5
R	•				•						
PBU			•	•		•	•	1	•	•	5
U	•				•						
A			•	•		•	•	1	•	•	5
6.8 Panel			•	•		•	•	1	•	•	5
TS-324							•	2			
VS-216							•	2	•		
SL-12							4	3	4		

1. Available in Polar White and Solar White only.


2. Available in Solar White only.

3. SL-12 Available in Polar White only.

4. SL-11 Available in Fluropón® or Galvalume® only.

5. Inquire for Polar White.

6. Polar White only.

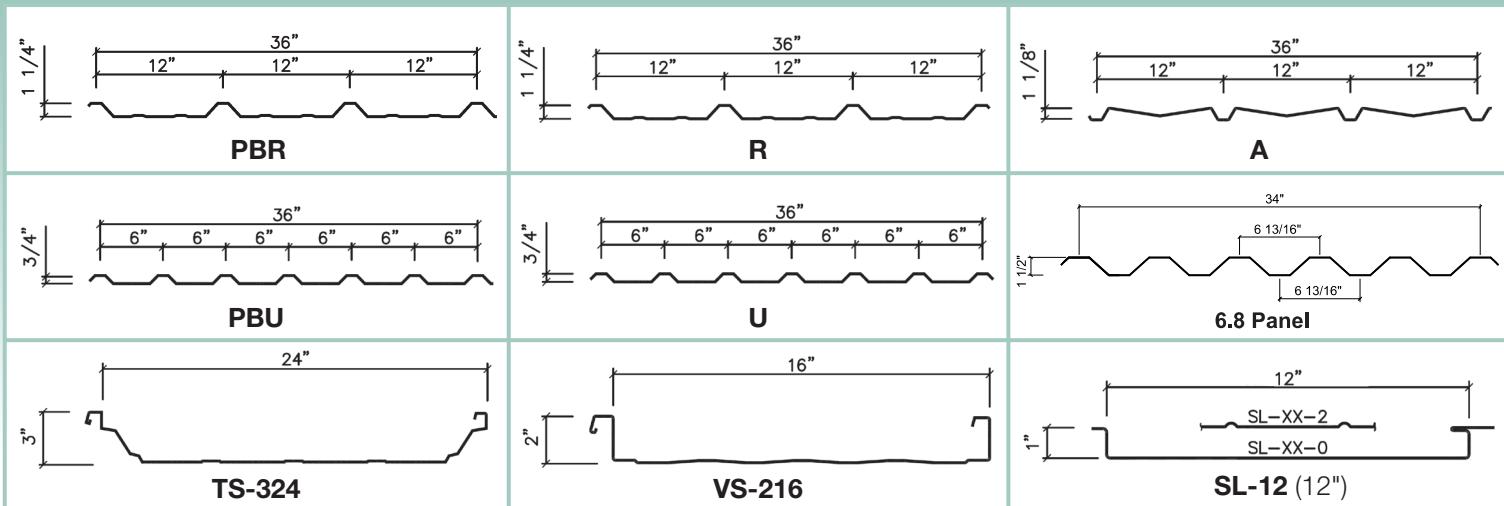

Fluropón® and WeatherXL™ are a registered trademark of The Sherwin-Williams® Company.

Galvalume® is a registered trademark of BIEC International, Inc.

© SBS All rights reserved.

WeatherXL™ & PPOL colors carry a 40-Year Limited Paint Warranty.


Fluropón® colors carry a 35-Year Limited Paint Warranty.

Commodity Polyester colors carry a 15-Year Limited Paint Warranty.

SHERWIN-WILLIAMS®
Coil Coatings

Light Transmitting Panel Options

LIGHT TRANSMITTING PANELS

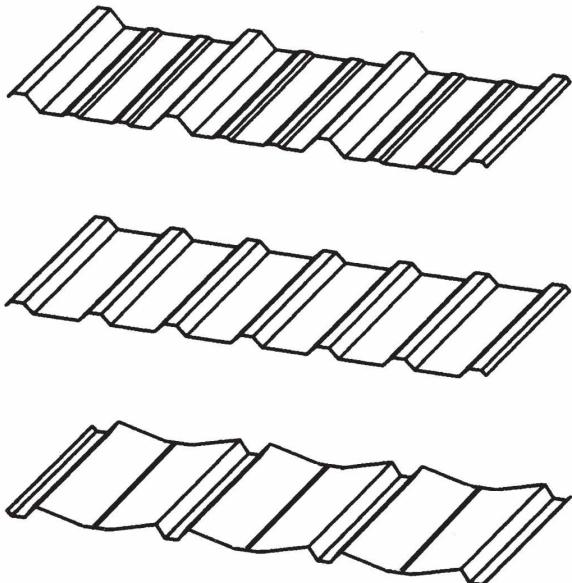


WARNING: These light transmitting panels are not designed or intended to bear the weight of any person walking, stepping, standing, or resting on them. Rodzina Building Systems **DISCLAIMS ANY WARRANTY OR REPRESENTATION, EXPRESSED OR IMPLIED**, that any person can safely walk, step, stand, or rest on or near these light transmitting panels or they comply with any OSHA regulation.

TYPE	COLOR	LENGTH	WT/EA
ACRYLIT HIGH-STRENGTH			
Acrylit Premium Resin, anti-yellowing, High Strength light transmitting panel. Woven fiberglass mat in each panel for maximum tear resistance. Nominal weight of 8 oz. per square foot with 77% light transmission.			
10-Year Performance Warranty			
R Panel	White	10'-8"	17.5#
R Panel	White	12'-0"	19.0#
U Panel	White	10'-8"	17.5#
ACRYLIT CHOPPED-GLASS			
Acrylit Premium Resin, anti-yellowing, chopped glass, light transmitting panel. Nominal weight of 8 oz. per square foot with 77% light transmission.			
10-Year Performance Warranty			
R Panel	White	12'-0"	10.8#
R Panel	White	5'-4"	8.5#
A Panel	White	11'-0"	17.0#
POLYCARBONATE			
Clear, polycarbonate light transmitting panels, 0.08" thickness			
R	Clear	12'-0"	6.0#

Gutter Options

Sculptured Gutter Option


SCULPTURED HANG-ON GUTTER ("R" PANEL)

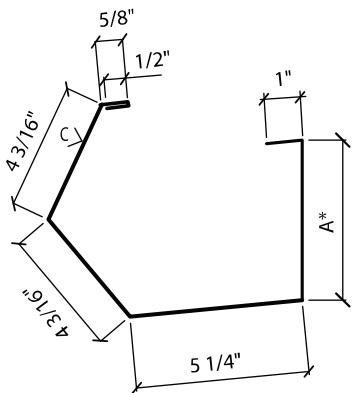

GUTTER ENDS

Specify roof slope

SCULPTURED HANG-ON GUTTER ("U" PANEL)

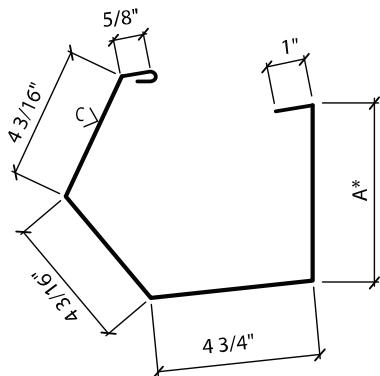


GUTTER ENDS

Specify roof slope


Box Gutter Option

BOX HANG ON GUTTER

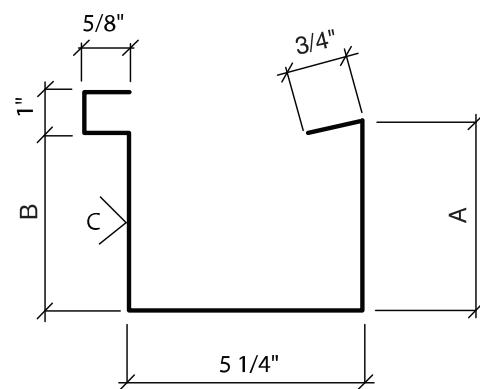

Specify roof slope

BOX EAVE GUTTER

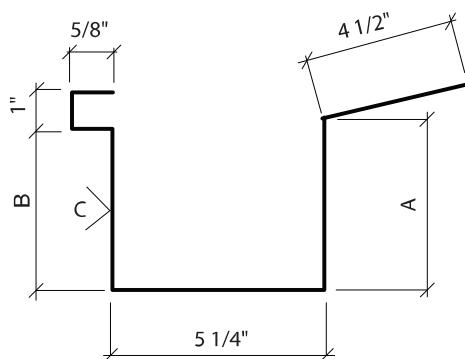


Specify roof slope


Downspout Options

Box Downspout Option


DOWNSPOUT (STRAIGHT)



DOWNSPOUT
(W/45° ELBOW)




DOWNSPOUT OFFSET




Roll Formed Downspout Option


ROLL FORMED
DOWNSPOUT (STRAIGHT)



ROLL FORMED
DOWNSPOUT (72° KICKOUT)




ROLL FORMED
DOWNSPOUT (45° OFFSET)




Base Trim Options

BASE TRIM - ALL PANELS

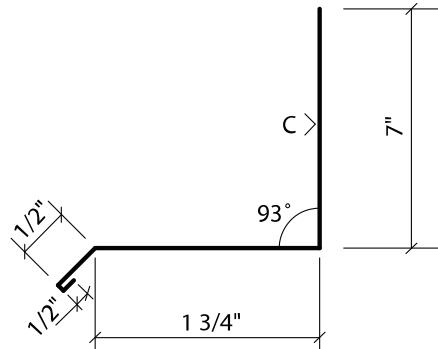








For use without sheeting notch in concrete.

BASE TRIM - ALL PANELS

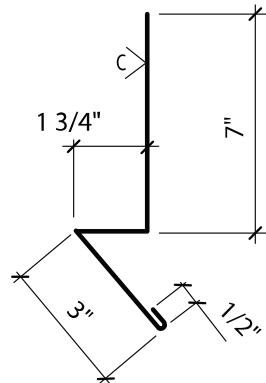

For use without sheeting notch in concrete.

Walk Door Options


STANDARD PERSONNEL DOOR UNITS		DESCRIPTION		
100 MPH Wind-Rated - Non-Labeled		DOOR SIZE	STYLE	WT./UNIT
	"M" STYLE	3070 (single leaf)	"M"	166#
	"G" STYLE	3070 (single leaf)	"G" or "NL"	161#
	"NL" STYLE	4070 (single leaf)	"M"	190#
	STANDARD FRAME SECTION	4070 (single leaf)	"G" or "NL"	185#
	GUIDE FOR DOOR SWING	6070 (double leaf)	"M"	265#
		6070 (double leaf)	"G" or "NL"	255#
Outside of Building All door units are non-handed.		Single leaf door unit includes: 20ga. embossed surface, polyurethane R11 insulated leaf, 16ga. Kerf frame with integral weather strip, assembly bolts, plain bearing hinges and threshold. Double leaf door unit includes: two surface bolts, right handed astragal in addition to the items listed for the single leaf unit. Glass and glazing is not included on "G" or "NL". ADA regulations require lever lockset for public access buildings.		
WIND-RATED DOOR UNITS		DESCRIPTION		
Design Pressure +/- 50 (145 MPH Wind-Rated) - Labeled Leaf & Frame		DOOR SIZE	STYLE	WT./UNIT
	"M" STYLE	3070 (single leaf)	"M"	166#
	"G" STYLE	3070 (single leaf)	"G" or "NL"	161#
	"NL" STYLE	3070 single leaf door unit includes: 20ga. embossed finish, polyurethane R11 insulated leaf, 16ga. Kerf frame with integral weather strip, assembly bolts, plain bearing hinges, (2) sets of girt attachments and threshold.		
	STANDARD FRAME SECTION	4070 (single leaf)	"M"	190#
	GUIDE FOR DOOR SWING	4070 (single leaf)	"G" or "NL"	185#
All Wind-Rated Door Units must be installed as an out-swing unit.		6070 double leaf door unit includes: 18ga. smooth finish, polyurethane R11 insulated leaf, 16ga. Kerf frame with integral weather strip, assembly bolts, plain bearing hinges, (2) sets of girt attachments, (2) surface bolts, right handed astragal and threshold.		
SPECIAL ORDER ONLY - 5 to 7 Working Days.		6070 (double leaf)	"M"	265#
		6070 (double leaf)	"G" or "NL"	255#
		4070 Single leaf door unit includes: 18ga. smooth finish, polyurethane R11 insulated leaf, 16ga. Kerf frame with integral weather strip, assembly bolts, plain bearing hinges, (2) sets of girt attachments, and threshold. Glass and glazing is not included on "G" or "NL". ADA regulations require lever lockset for public access buildings.		
		Single Leaf Door units must use: Grade 1 Heavy Duty Lever Cylindrical or Mortise Locket, or Grade 1 Rim or Mortise Lever Panic Device.		
		6070 Double Leaf Door units must use: Grade 1 Heavy Duty Lever Mortise Locket. Panic Device use requires special 16ga. leaves. Please inquire for price and availability.		
		Impact Rated Glass (supplied by others) must be installed in all openings for glass in order to maintain proper design pressure rating.		
HURRICANE DOOR UNITS		DESCRIPTION		
Design Pressure +/- 75 (170 MPH Wind-Rated) - Labeled Leaf & Frame		DOOR SIZE	STYLE	WT./UNIT
	"M" STYLE	3070 (single leaf)	"M"	166#
	"G" STYLE	3070 (single leaf)	"G" or "NL"	161#
	"NL" STYLE	4070 (single leaf)	"M"	190#
	STANDARD FRAME SECTION	4070 (single leaf)	"G" or "NL"	185#
All Hurricane Door Units must be installed as an out-swing unit.		Single leaf door unit includes: 18ga. smooth surface, polyurethane R11 insulated leaf, 16ga. Kerf frame with integral weather strip, assembly bolts, plain bearing hinges, (2) sets of girt attachments, and threshold. Glass and glazing is not included on "G" or "NL". ADA regulations require lever lockset for public access buildings.		
SPECIAL ORDER ONLY - 5 to 7 Working Days.		All Single Leaf Door units must use: Grade 1 Heavy Duty Lever Mortise Locket, or Grade 1 Mortise Lever Panic Device.		
		Impact Rated Glass (supplied by others) must be installed in all openings for glass in order to maintain a maximum design pressure rating of +/- 70 (165 MPH Wind-Rated)		

Door Canopy Options

PERSONNEL DOOR CANOPY KIT	WIDTH	FINISH	GAUGE	WT./EA.
	4'-6	White	26	100#
	4'-6	Color	26	100#
	7'-6	White	26	165#
	7'-6	Color	26	165#
Colors Limited to Standard SMP Color Selections. For other colors, please inquire.				
Price includes wood crating and all necessary hardware for installation				
SPECIAL ORDER ONLY - 5 to 7 working days				

Steel Louver Options

STEEL LOUVERS



All louvers have 18 gauge frames, 20 gauge blades and choice of bird or insect screen.

SPECIAL ORDER ONLY - 5 to 7 working days.

WIDTH	HEIGHT	TYPE	WT./EA.
3'	x	3' Fixed Blade	54.0#
3'	x	4' Fixed Blade	72.0#
3'	x	5' Fixed Blade	90.0#
4'	x	4' Fixed Blade	96.0#
3'	x	3' Adjustable Blade	54.0#
3'	x	4' Adjustable Blade	72.0#
3'	x	5' Adjustable Blade	90.0#
4'	x	4' Adjustable Blade	96.0#

Specify PBR panel, PBU panel, PBA panel, or Straight Fins.

All louvers are fabricated with permanent fins to fit the specified panel.
 Width of louver is measured center-to-center of fins.

All louvers are self-framing and require no additional flashing or trim.




If a louver is to fit in an existing framed opening, the exact size of the framed opening must be provided at the time of order.

All adjustable louvers operate with a hand crank. For pull-chain operation, please inquire.

All louvers are special order and are not returnable.


Colors Limited to Standard SMP Color Selections.

Window Options

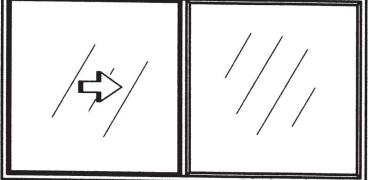		DESCRIPTION	
		SIZE	WT./EA.
HORIZONTAL SLIDE WINDOWS       		3030 w/ half-screen 4030 w/ half-screen 4040 w/ half-screen 5030 w/ half-screen 6030 w/ half-screen	24.0# 31.8# 42.4# 36.5# 43.8#
All windows include PBR Panel fins in the carton. If PBU, A-Panel or Straight Fins are required, please request at the time of order. All windows have field installed fins to fit the specified panel. Width of window is indicated by the first two digits in the description and is measured center-to-center of the fins. Windows are self-framing and require no additional flashing or trim. Glass is clear DSB grade. LTL crating charge is \$50 per order.			
VERTICAL SLIDE WINDOWS  SPECIAL ORDER ONLY - 5 to 7 Working Days		DESCRIPTION	
		SIZE	WT./EA.
		3030 w/ half-screen 3040 w/ half-screen 3050 w/ half-screen	30.0# 34.0# 38.0#
All windows include PBR Panel fins in the carton. If PBU, A-Panel or Straight Fins are required, please request at the time of order. All windows have field installed fins to fit the specified panel. Width of window is indicated by the first two digits in the description and is measured center-to-center of the fins. Windows are self-framing and require no additional flashing or trim. Glass is clear DSB grade. LTL crating charge is \$50 per order.			
FIXED GLASS SLIMLINE WINDOWS  SPECIAL ORDER ONLY - 5 to 7 Working Days		DESCRIPTION	
		SIZE	WT./EA.
		1070 2060 2070	40.0# 50.0# 52.0#
All windows include PBR Panel fins in the carton. If PBU, A-Panel or Straight Fins are required, please request at the time of order. All windows have field installed fins to fit the specified panel. Width of window is indicated by the first two digits in the description and is measured center-to-center of the fins. Windows are self-framing and require no additional flashing or trim. Glass is 1/8" Clear Tinted Tempered. LTL crating charge is \$50 per order.			


Roof Vent Options

CONTINUOUS THROAT GRAVITY RIDGE VENTILATORS

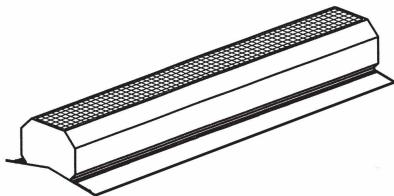

DESCRIPTION	WT./EA.
9" Throat x 10' Long, 26 GA, w/ damper IN STOCK in flat skirt & PBR Die-formed skirts only	207.0#
12" Throat x 10' Long, 26 GA, w/ damper SPECIAL ORDER ONLY - 5 to 7 working days All ventilators have bird screen and damper. Included with each ventilator are splice plates, end skirts, and special tape sealant. All ventilators will conform to roof slopes up to 6:12. For standard color ventilators other than Polar White, please inquire. Die-formed skirts are for PBR or PBU panel available in 24 gauge GALVALUME® and Polar White only. Add \$55.00.	223.0#

RIDGELINE CORAVENT LO-PROFILE FLOATING RIDGE VENT

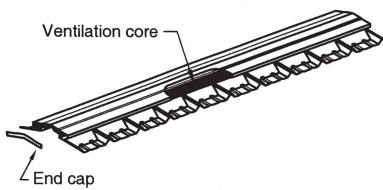

SPECIAL ORDER ONLY - 5 to 7 working days.

DESCRIPTION	WT./EA.
4" Throat x 10' Long, 24 GA Designed for minimal ventilation with lower profile appearance. For Coravent with flat skirts, no extra charge. Must specify roof slope (up to 12:12). Colors Limited to Standard 24 GA Kynar Color Selections and PPOL Polar White. Die-formed skirts are for PBR or PBU panel available in 24 GA Galvalume and PPOL Polar White only. End caps and splice kits sold separately.	65.0#

End Cap
(2 per run required.)

Optional Splice Kit
(Splice cover and sealant)

Roof Vent Options Continued

CIRCULAR GRAVITY VENTILATORS



SPECIAL ORDER ONLY - 5 to 7 working days.

	DESCRIPTION	WT./EA.
	20" Diameter Throat, 26 GA, w/ damper	70.0#
	24" Diameter Throat, 26 GA, w/ damper	70.0#
All ventilators have bird screen and damper.		
Pricing shown is for ventilators mounted into a matching finish PBR panel 3'-0" ridge cap. Stocked in 1:12 slope only.		
For ventilators mounted into a PBU panel 3'-0" ridge cap or any other roof slope on a PBR panel 3'-0" ridge cap (up to 6:12), please inquire		
For ventilators mounted into a flat skirt, no extra charge.		
For ventilators to be slope-mounted into a 6'-0 long PBR panel, add \$45.00 per vent.		
For standard color ventilators other than Polar White, please inquire		

Type	Thickness	Width	R-Value
VR or VRR+			
<i>Fiberglass insulation with bonded reflective backing to serve as a vapor retarder and protected cover over the fiberglass.</i>	3"	72"	R-10
	4"	72"	R-13
	6"	72"	R-19
	8"	72"	R-25
WMP-10			
<i>Fiberglass insulation bonded to white reinforced vinyl backing. Standard duty vapor retarder compromised of white metalized polypropylene facing, a flame-resistant adhesive, tri-directional fiberglass and polyester reinforcing mesh, and a white kraft paper backing.</i>	3"	72"	R-10
	4"	72"	R-13
	6"	72"	R-19
	8"	72"	R-25
WMP-50			
<i>Fiberglass insulation bonded to white reinforced vinyl backing. Fiberglass insulation laminated to wmp-50 heavy duty retarder. Heavy-duty insulation twice as heavy as WMP-10.</i>	3"	72"	R-10
	4"	72"	R-13
	6"	72"	R-19
	8"	72"	R-25
UNFACED			
<i>Fiberglass insulation that does not contain a backing. Better for dry interior locations not prone to moisture.</i>	3"	72"	R-10
	4"	72"	R-13
	6"	72"	R-19
	8"	72"	R-25