



**NuMaxx**Floors  
INNOVATION & DESIGN

MORE THAN JUST A 100%  
WATERPROOF VINYL FLOOR.

**Riviera**  
Collection  
—SPC Ultracore—



CONTENT  
INHALT  
SOMMAIRE  
CONTENUTO


4. MENTON NM1011
5. IMPERIA NM1009
6. NICE NM1001
7. SAVONA NM1010
8. & 9. PORTOFINO NM1005
10. GENUA NM1003
11. MONACO NM1004
12. CANNES NM1002
13. PORTOFINO NM1005
14. STRUCTURE / AUFBAU /  
STRUCTURE / SOVRASTRUTTURA
16. BENEFITS / VORTEILE /  
AVANTAGES / BENEFICI
18. TECHNICAL DATA /  
TECHNISCHE DATEN /  
CARACTÉRISTIQUES TECHNIQUES /  
TECNICHE CARACTÉRISTIQUES

A close-up photograph of a grey wood-grain laminate floor. The image shows several vertical planks with a detailed wood grain pattern. A semi-transparent grey rectangular box is overlaid on the right side of the image, containing the text 'MENTON NM1011' in white, uppercase letters.

MENTON NM1011

A close-up photograph of a light-colored wood surface, likely oak, showing a prominent vertical grain and several knots. A semi-transparent grey rectangular box is overlaid on the left side of the image, containing the text 'IMPERIA NM1009' in white, uppercase letters.

IMPERIA NM1009

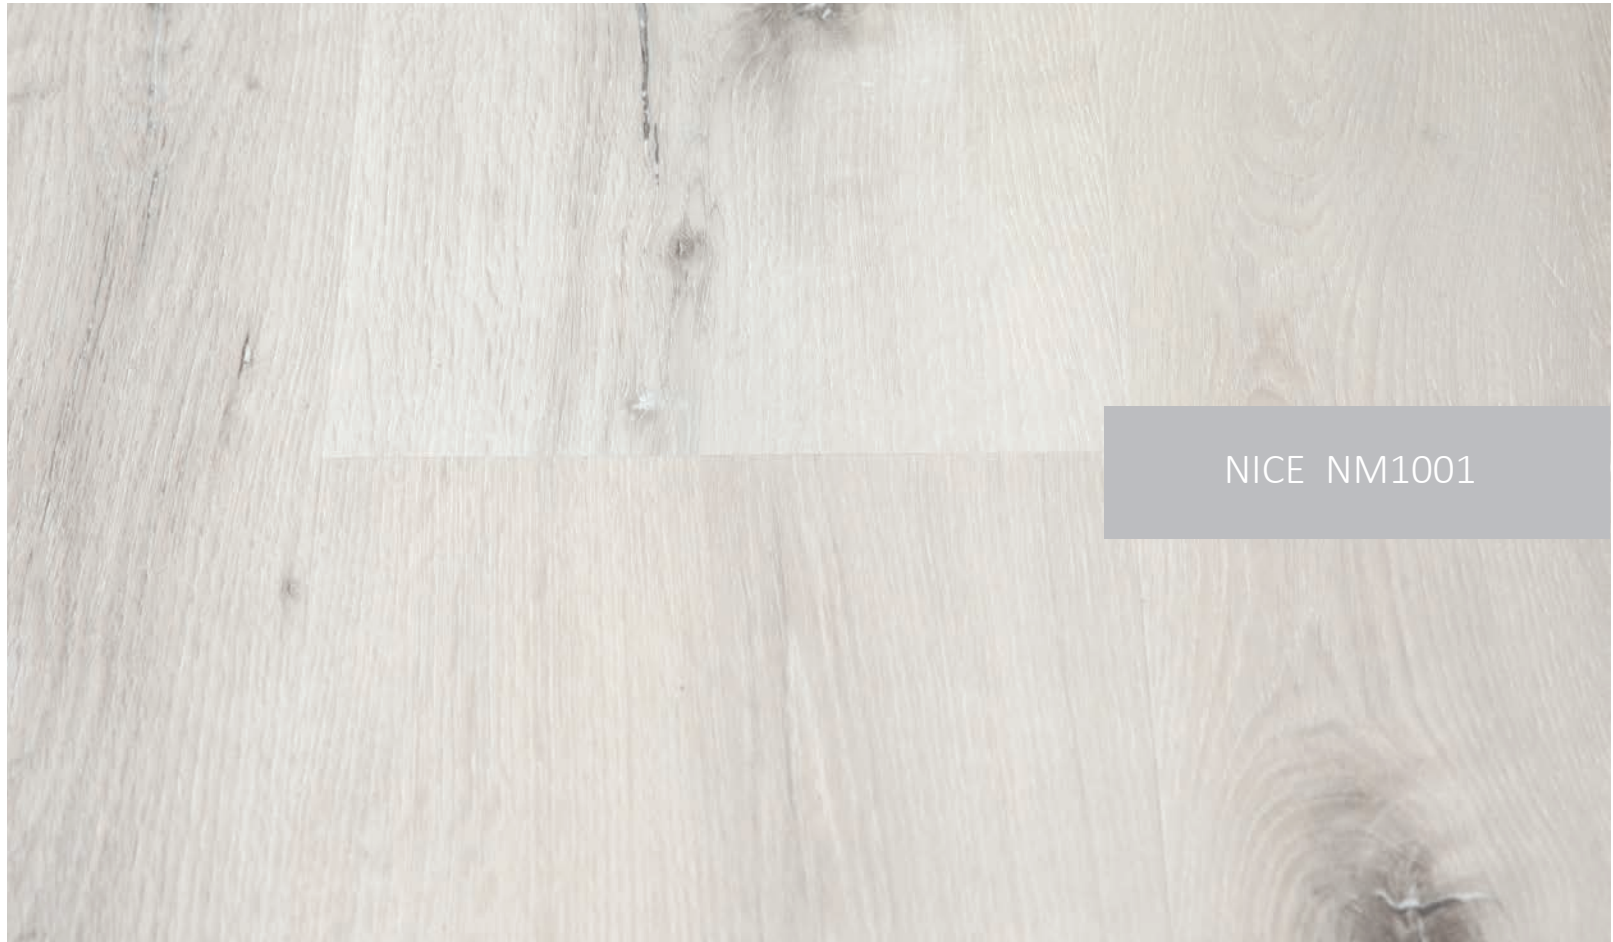

NICE NM1001

A close-up photograph of a wood-grain surface, likely a laminate or veneer. The wood grain is a mix of light and dark brown tones, showing natural patterns and knots. A semi-transparent grey rectangular box is overlaid on the left side of the image, containing the text 'SAVONA NM1010' in white, uppercase letters.

SAVONA NM1010










GENUA NM1003




MONACO NM1004

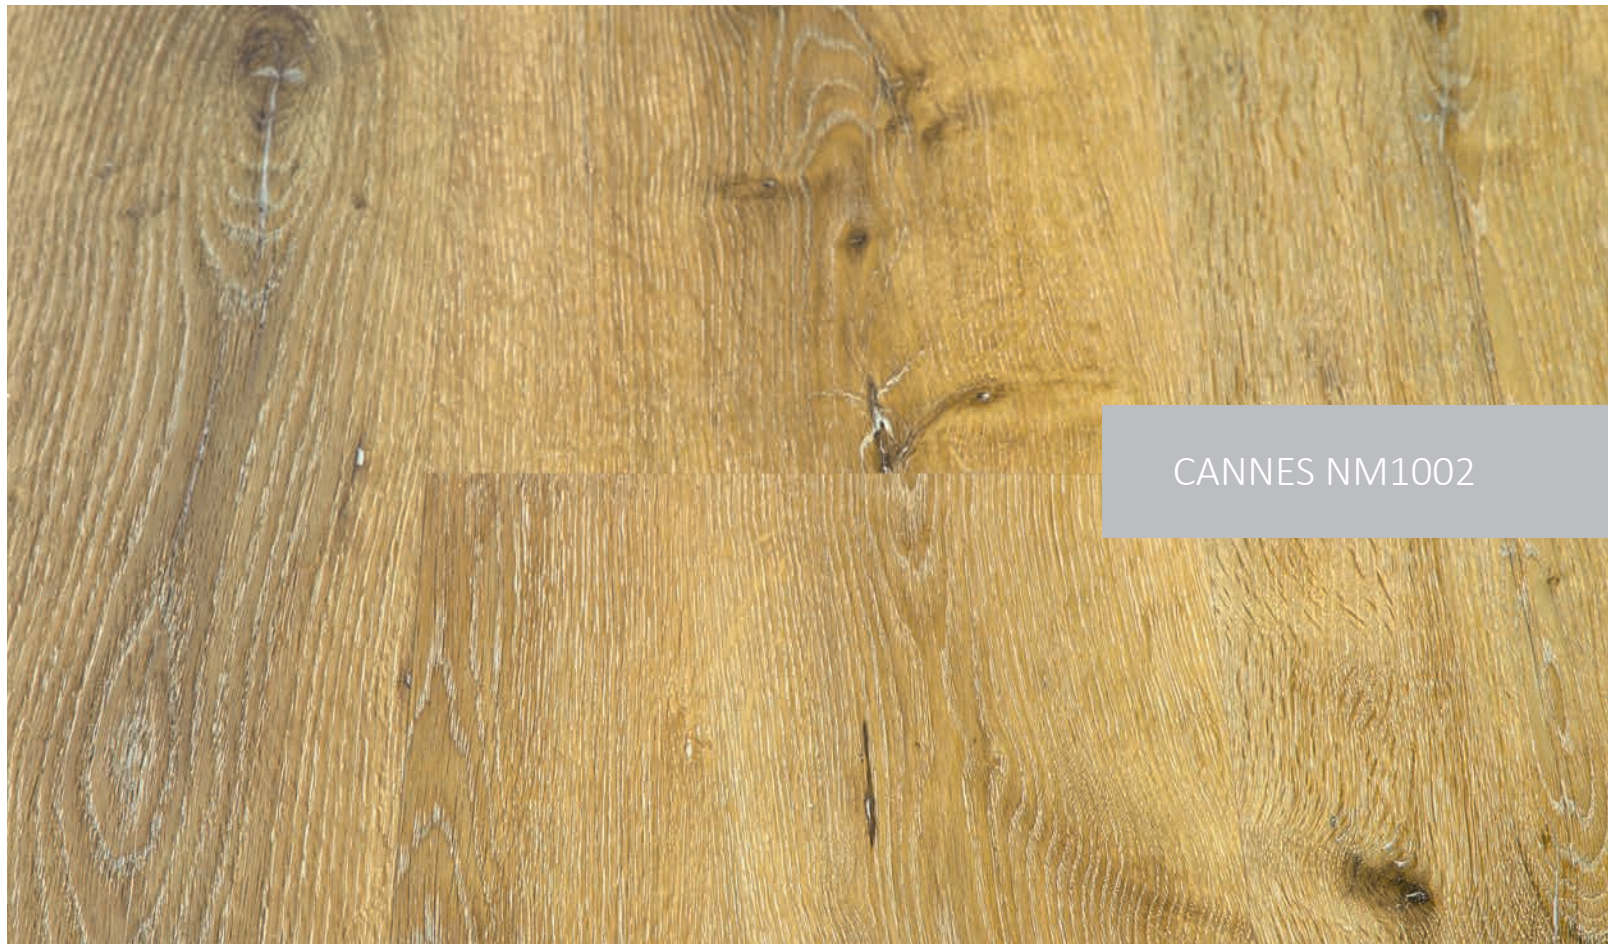

CANNES NM1002

A detailed close-up of a wood grain texture. The image shows various patterns of wood grain, including straight lines, wavy lines, and prominent knots. The color palette is a range of earthy browns, from light tan and beige to deep, dark chocolate and near-black tones. The texture appears natural and organic, with visible grain lines and some small imperfections or knots.

PORTOFINO NM1005

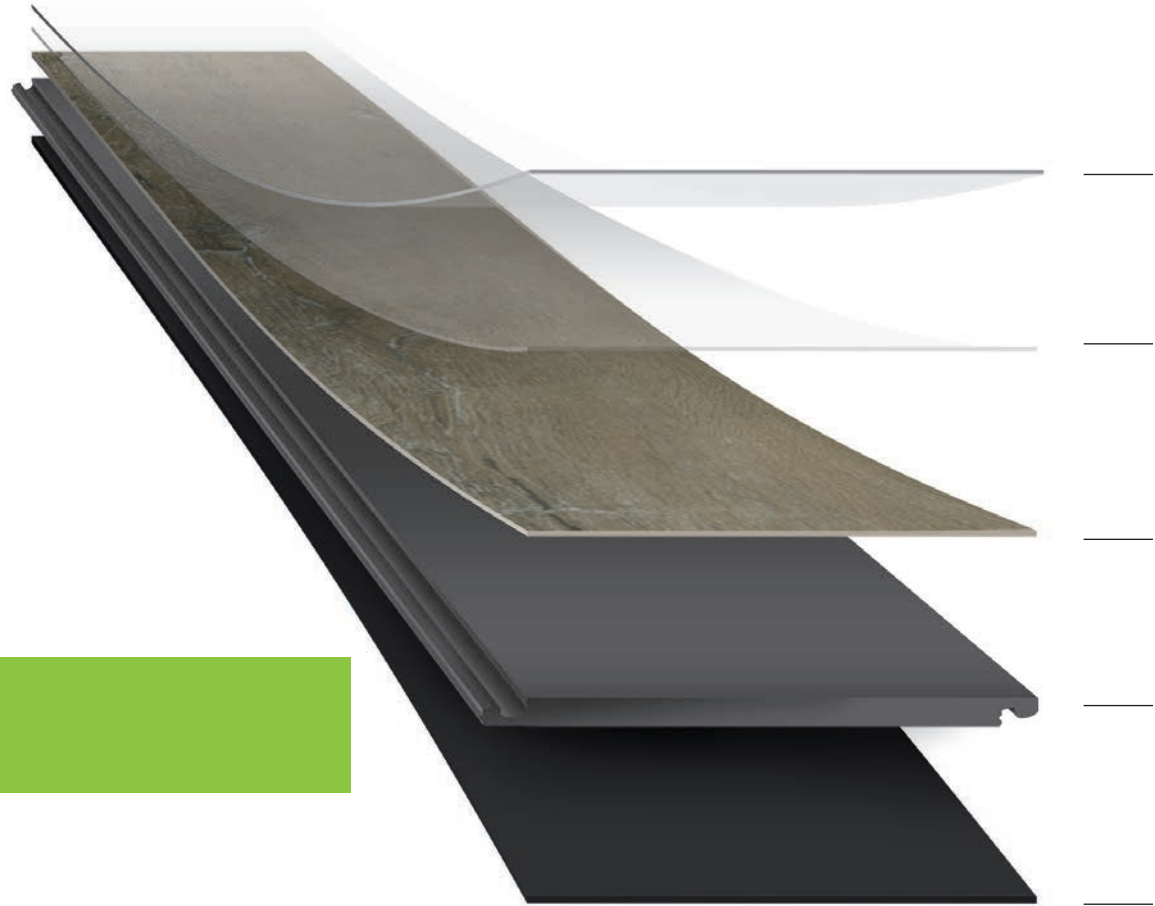

STRUCTURE  
AUFBAU



UV SCRATCH-RESISTANT PROTECTIVE COATING  
KRATZBESTÄNDIGE UV-SCHUTZBESCHICHTUNG

WEAR LAYER  
NUTZSCHICHT


HIGH RESOLUTION DECORATIVE FILM LAYER  
DEKORFOLIE IN HÖCHSTER DRUCKQUALITÄT

STONE-POWDER-COMPOSITE CORE  
STEIN-PULVER-VERBUND-TRÄGERPLATTE

HIGH QUALITY CORK UNDERLAYMENT  
QUALITATIV HOCHWRETIGE KORK-TRITTSCHALLMATTE




**EN** Superior abrasion and scratch resistance  
**DE** Hohe Abrieb- und Kratzfestigkeit  
**FR** Résistance supérieure à l'abrasion et aux rayures  
**IT** Superiore resistenza all'abrasione



**EN** No acclimatization necessary  
**DE** Keine Akklimation nötig  
**FR** Pas besoin d'acclimatation  
**IT** Non necessita di acclimatazione



**EN** 100% WATERPROOF  
**DE** 100% WASSERFEST  
**FR** 100% RÉISTANT À L'EAU  
**IT** 100% RESISTENTE ALL'ACQUA




**EN** Attached 1.5mm cork underlayment provides added sound insulation & absorbs subfloor imperfections  
**DE** Die aufkaschierte 1.5mm Kork-Unterlage bietet eine hohe Trittschall- und Gehschalldämmung und absorbiert Unterbodenunebenheiten  
**FR** La sous-couche en liège de 1,5 mm offre une isolation phonique et acoustique élevée et absorbe les bosses sous le boîtier  
**IT** Il sottostrato in sughero da 1,5 mm offre un elevato isolamento acustico da calpestio e da calpestio e assorbe gli urti sottoscocca



**EN** Synchronised grain structure for the most authentic real wood effect  
**DE** Synchronporen-Struktur für den authentischen Echtholz-Effekt  
**FR** Structure à pores synchrones pour effet bois véritable authentique  
**IT** Struttura a pori sincroni per un autentico effetto vero legno





**EN** Dimensionally stable  
**DE** Formstabil  
**FR** Dimensionnellement stable  
**IT** Dimensionalmente stabile



**EN** Easy & fast to install- installation on any hard surface  
**DE** Schnelle & einfache Verlegung auf allen bestehenden Hartböden  
**FR** Pose facile, compatible toutes les sol dur  
**IT** Facile da installare, può essere installato su ogni superficie esistente

**UNIPUSH**  
PATENTED TECHNOLOGY®



**EN** Suitable for underfloor heating & cooling  
**DE** Geeignet für Bodenheizung & Kühlung  
**FR** Compatible sur sol chauffant & refroidissant  
**IT** Adatto a riscaldamento a pavimento e raffreddamento



**EN** Phthalate free  
**DE** phthalatfrei  
**FR** sans phthalate  
**IT** Privo di ftalati



CE-European Conformity  
Certificates

# TECHNICAL DATA

## PRODUCT SPECIFICATIONS

Product standard / Produktenorm / Standard produit

Total thickness / Gesamtstärke / Epaisseur totale

Wear layer thickness / Nutzschiebtdicke / Epaisseur couche d'usure

Classification / Nutzungsklasse / Classe d'usage

Total weight / Flächengewicht / Poids total

Wear layer binder content / Bindemittelgehalt / Teneur en agent liant (couche d'usure)

Abrasion group / Verschleißprüfung / Groupe d'abrasion

Dimensions / Dimensionen / Dimensions

Locking system / Klickverbindung / Type de clic

Bevelled edges / Gefaste Mikrofugen / Micro chanfrein

## ENVIRONMENT

VOC emission class (French regulation) - Indoor air quality / Raumluftqualität / Qualité de l'air intérieur ISO 16000-9

Floorscore VOC test - Indoor air quality / Raumluftqualität / Qualité de l'air intérieur ISO 16900-9

Plasticizer / Weichmacher / Plastifiant

Formaldehyde / Formaldehyde / formaldéhyde

Recyclability / Recyclingfähigkeit / Recyclabilité

## STANDARD

## Numaxx SPC ultracore

-	EN ISO 10582	Heterogeneous resilient floorcovering Heterogener elastischer Designbodenbelag Revêtements de sol résilients hétérogènes
EN ISO 24346	6,5mm	
EN ISO 24340	0,5mm / 20 mil	
EN ISO 10874	Domestic: 23 Commercial: 33	
EN ISO 23997	10'150 g/m <sup>2</sup>	
EN ISO 10582	Type I / Typ I / Type I	
EN 660-2	Group T: ≤ 2,00 mm <sup>3</sup>	
EN ISO 24342	Planks / Dielen / Lames: 1524x228mm Box: 6 planks / 2.085m <sup>2</sup> Pallet: 52 boxes / 108.42m <sup>2</sup>	
-	Unipush	
-	Yes / Ja / Oui	

## PRODUCT PERFORMANCES

Dimensional stability / Dimensionsstabilität / Stabilité dimensionnelle  
Castor chair / Schreibtischstuhl / Chaise à roulettes

Furniture leg / MöbelfüÙe / Pied de meuble

Squareness & straightness / Rechtwinklichkeit & Geradheit / Equerrage  
Residual indentation / Eindruckverhalten / Poinçonnement statique rémanent  
Light fastness / Lichtechtheit / Solidité lumière  
Slip resistance / Rutschhemmung / Glissance

Resistance to chemicals / Chemikalienbeständigkeit / Résistance aux produits chimiques

Thermal resistance / Wärmewiderstand / Conductivité thermique

Curl after exposure to heat / Curling nach Wärmeeinwirkung / Incurvation après exposition à la chaleur

Fire resistance / Brandverhalten / Classement feu

Electrical properties / Elektrostatische Eigenschaften / Charges électrostatiques

Resistance against staining / Bestimmung der Fleckenempfindlichkeit / Résistance aux tâches

Underfloor heating suitability / Fußbodenheizung / Compatibilité chauffage par le sol

## STANDARD Numaxx SPC ultracore

EN ISO 23999	≤ 0,06 %
EN 12529	No damage / Keine Schäden / Aucun dommage (Type W)
EN ISO 16581	No damage / Keine Schäden / Aucun dommage
EN ISO 24342	≤ 0,25 mm
EN ISO 24343-1	≤ 0,10 mm ≥ 6
EN 105-B02	R10
DIN 51130	DS
EN 13893	
EN ISO 26987	Not affected (0) / Nicht verändert (0) / Non affecté (0)
EN ISO 10456	0,04 m <sup>2</sup> K/W
EN ISO 23999	≤ 2 mm
EN ISO13501-1Bfl-s1	
EN 1815	≤ 2kV
EN 26987	Passed / Bestanden / Haute résistance
EN 12524	Suitable / Geeignet / Compatible

## WARRANTIES

Residential warranty / Garantie im Wohnbereich / Garantie en usage résidentiel

Commercial warranty / Garantie im Objektbereich / Garantie en usage commercial

- 35 years / Jahre / ans

- 10 years / Jahre / ans

**NuMaxx**Floors  
INNOVATION & DESIGN

phone:

+41 (0)41 207 89 65

email:

[info@numaxx.ch](mailto:info@numaxx.ch)

[www.numaxx.ch](http://www.numaxx.ch)

address:

Numaxx GmbH - Business Park Luzern - Littauerboden 1 - CH-6014 Luzern  
Switzerland

