



AZ-CFH3500

FLOOR MOUNTER HEAT RECOVERY AIR HANDLING UNITS

The brand new premium line of commercial heat recovery air handling units for floor mounting with the high-efficient counter-flow heat exchanger. Provides 2060 CFM airflow capacity. Optionally accomplished with no heater (CFH series), electric heater (CFH-HE series) or water heater (CFH-HW series) and ready for operation with all necessary control elements.

FANS

High-efficient EC fans. Impellers with backward curved blades. Low power consumption at any speed, silent stable operation in any climate conditions.

CONTROL

The integrated plug-and-play controls on the basis of the Carel kVent controller. Easy connecting via web-interface using the Ethernet-Modbus and BACnet.

PLUG FAN CASING

The casing panels are made of steel with zinc-aluminium coating and internally lined with 19/16" heat- and sound-insulating mineral wool layer. The unit has C4 corrosion resistance class in compliance with ISO 12944. Each model is available in left- and right-handed modifications. The unit has service access on both sides and on the bottom.

HEAT EXCHANGER

High-efficient counter-flow heat exchanger is made of profiled aluminium plates and is impregnated with elastic heat-resistant sealant. The stainless steel drain pan is located on the inlet and outlet sides.

CONTROL PANEL

- A30 th-Tune: standard control panel with handy interface ensures basic setup of parameters.
- A32 pGDe: control panel with expanded functionality ensures complete setup of parameters.

FILTERS

Washable MERV 13 panel filters in exhaust and supply air streams.


BYPASS & DAMPERS

100% bypass of the heat exchanger with automatic damper and Belimo actuator ensures active freeze protection. Free heating and cooling functions are also available. Built-in automatic external air dampers with Belimo actuators.



DIMENSIONS

MEASUREMENTS (IN.)							
L	W	H	H1	S	H2 (OPTION)	E2	E3 (OPTION)
86 5/8	36 1/16	50 13/16	13 3/4	22 5/8	36 1/16	6 11/16	14 3/16

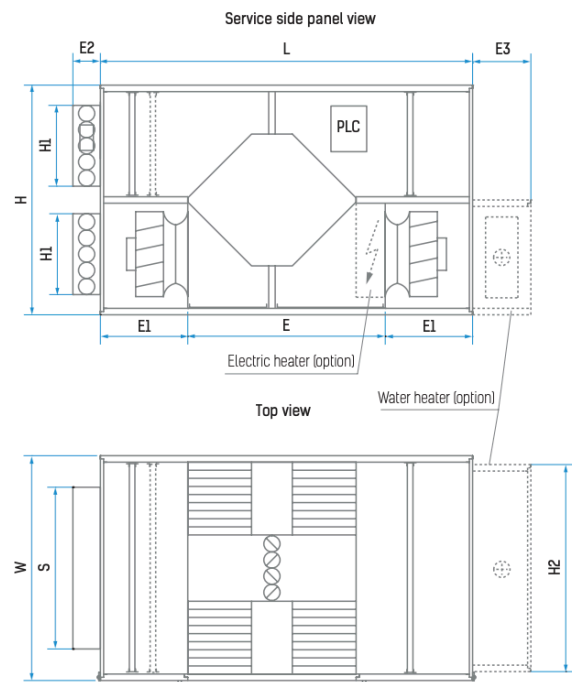

ALL RIGHTS RESERVED TO D-VAC SALES INC.
200B VERDI STREET, FARMINGDALE NY 11735

SALES@DVACHVAC.COM

516-256-3131



HVAC Manufacturer's Representative





AZ-CFH3500

FLOOR MOUNTER HEAT RECOVERY AIR HANDLING UNITS

TECHNICAL DATA

MODEL		AZ-CFH3500
NOMINAL AIRFLOW (CFM)		2060
EC Fans	Phase/voltage [50/60Hz/VAC]	~3.380/480
	Power/current [kW/A]	2 x 1.14/1.8
	Fan speed [min^{-1}]	2400
	Permissible ambient temperature [°F]	-31... +122
	Motor Protection	IP54
	Insulation Class	F
	Motor sound power level to outlet [Sones]	28
	SFP @ nominal airflow, max. pressure [kW/(m^3/s)]	2 x 1.13
Filter class exhaust/supply standard (optional)		MERV 13 (MERV8) / MERV13 (MERV8)
Weight (net, without packaging) [lb]		800
Protection Class		IP34
Sound pressure level @ 1ft to environment (Sones)		3

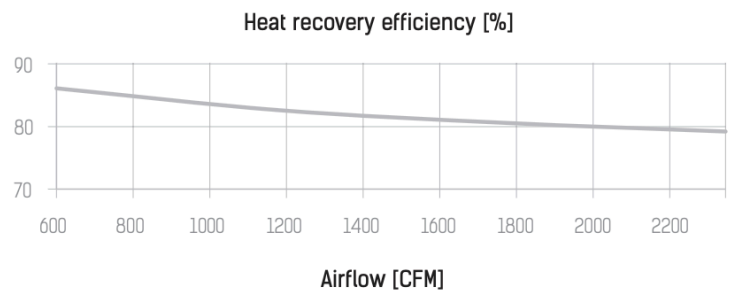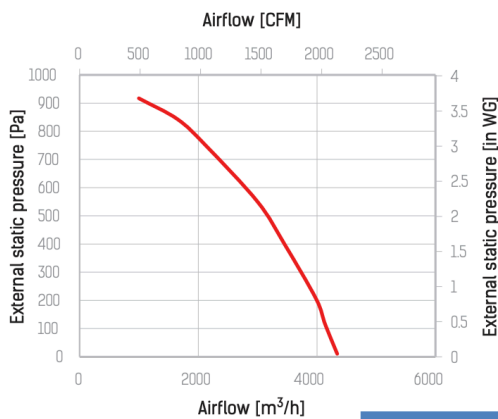

Sound power Lw in dB									
Environment	67	64	66	57	37	59	53	57	64
Outlet	69	68	74	73	69	70	66	64	76
Hz	63	125	250	500	1000	2000	4000	8000	LwA

ALL RIGHTS RESERVED TO D-VAC SALES INC.
200B VERDI STREET, FARMINGDALE NY 11735

SALES@DVACHVAC.COM

516-256-3131



HVAC Manufacturer's Representative