
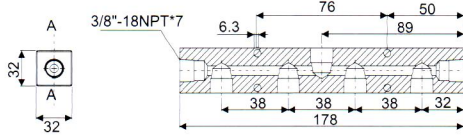
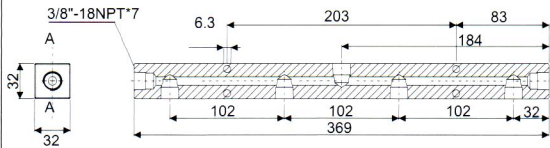

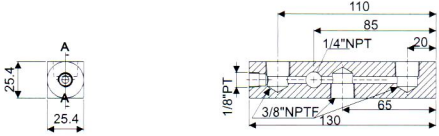







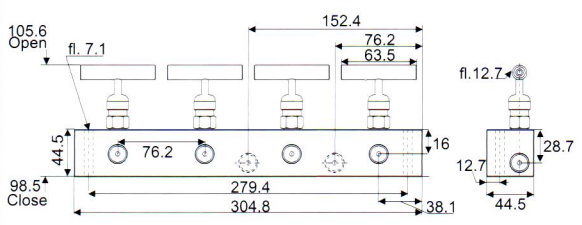


**SA Series** Maximum Operating Pressure **700 bar**

	Model Number	Description	Dimensions (mm)
 <p><b>SA-64</b></p> <p><b>SA-65</b></p>	<b>SA-64</b>	178mm Long Manifold with 7 female ports.	
	<b>SA-65</b>	369mm Long Manifold with 7 female ports	
 <p><b>SA-25G</b></p>	<b>SA-25G</b>	130mm Long Manifold 3/8"-18NPTF Female port : 3 1/8"PT Female port : 1 1/4"NPT Female port : 1	
 <p><b>SA-25</b></p>	<b>SA-25</b>	130mm Long Manifold 3/8"-18NPTF Female port : 3 1/8"PT Female port : 1	
 <p><b>SA-23</b></p>	<b>SA-23</b>	75mm Long Manifold 3/8"-18NPTF Female port : 3 M8-1.25 Female port : 1	
 <p><b>SA-66</b></p>	<b>SA-66</b>	6-Port Hexagon Manifold Plugs furnished for all ports 3/8"-18NPTF	
 <p><b>ASM-2</b></p> <p><b>ASM-4</b></p>	<b>ASM-2</b> 2 control bars	<b>Premounted Manifold</b> Functions as split-flow valve to control 2~4 single-acting cylinders simultaneously. All ports 3/8"-18NPTF	
	<b>ASM-4</b> 4 control bars	<b>Premounted Manifold</b> Functions as split-flow valve to control 2~4 single-acting cylinders simultaneously. All ports 3/8"-18NPTF	