
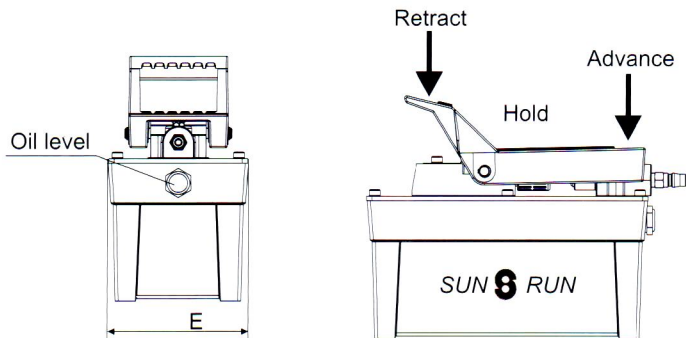
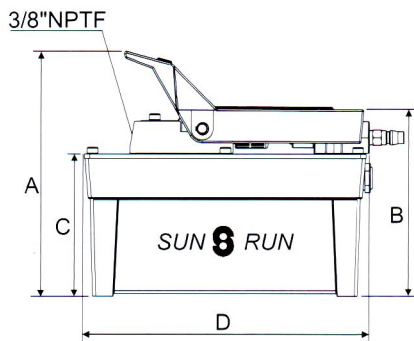
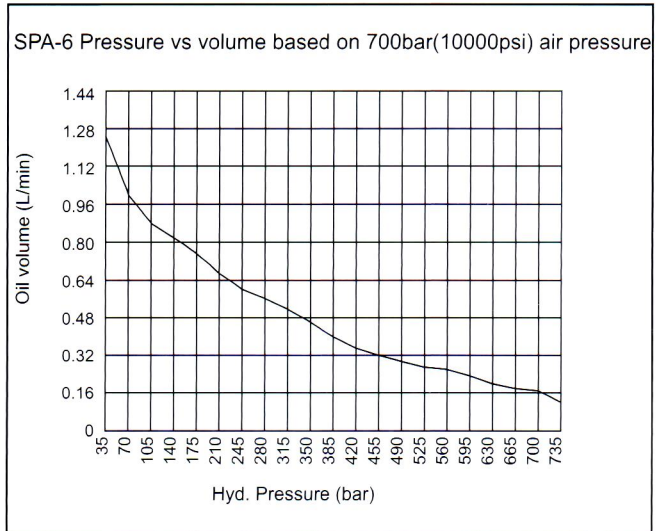
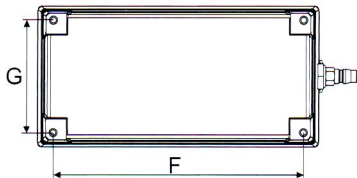


## SPA-6 Air Hydraulic Pumps

- Internal relief valve protects circuit components, air inlet filter protects motor .
- High pressure output, light weight by Aluminum Alloy reservoir.
- Serviceable pump motor is not a "throw away", providing economical repair.
- Permanently vented reservoir cap.
- Three-position treadle provides cylinder advance, hold and retract operation.
- Equipped with air coupler, easy for using.
- dBA 85 at 700bar for all SPA-6 pumps, lower noise.

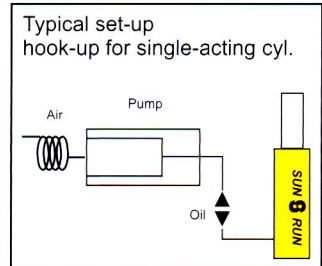

Model Number	Usable Oil Capacity	Pressure Rating		Air Pressure Range	Output Flow Rate (noload)		Dimensions (mm)						W.t (include oil)		
		(bar)	(psi)		(kgf/cm <sup>2</sup> )	(L/min)		A	B	C	D	E		F	G
						0 bar	700bar								
SPA-6	1.3 (L)	700	10,000	6-10	0.93	0.12	225	171	131	260	128	228	102	8.2	