


Disposable enteral feeding set



	Model No	Product Description	Pcx/box
Pump	A5	Dual bags, silicon tube	50
Note: Silicon tube length is 110mm			

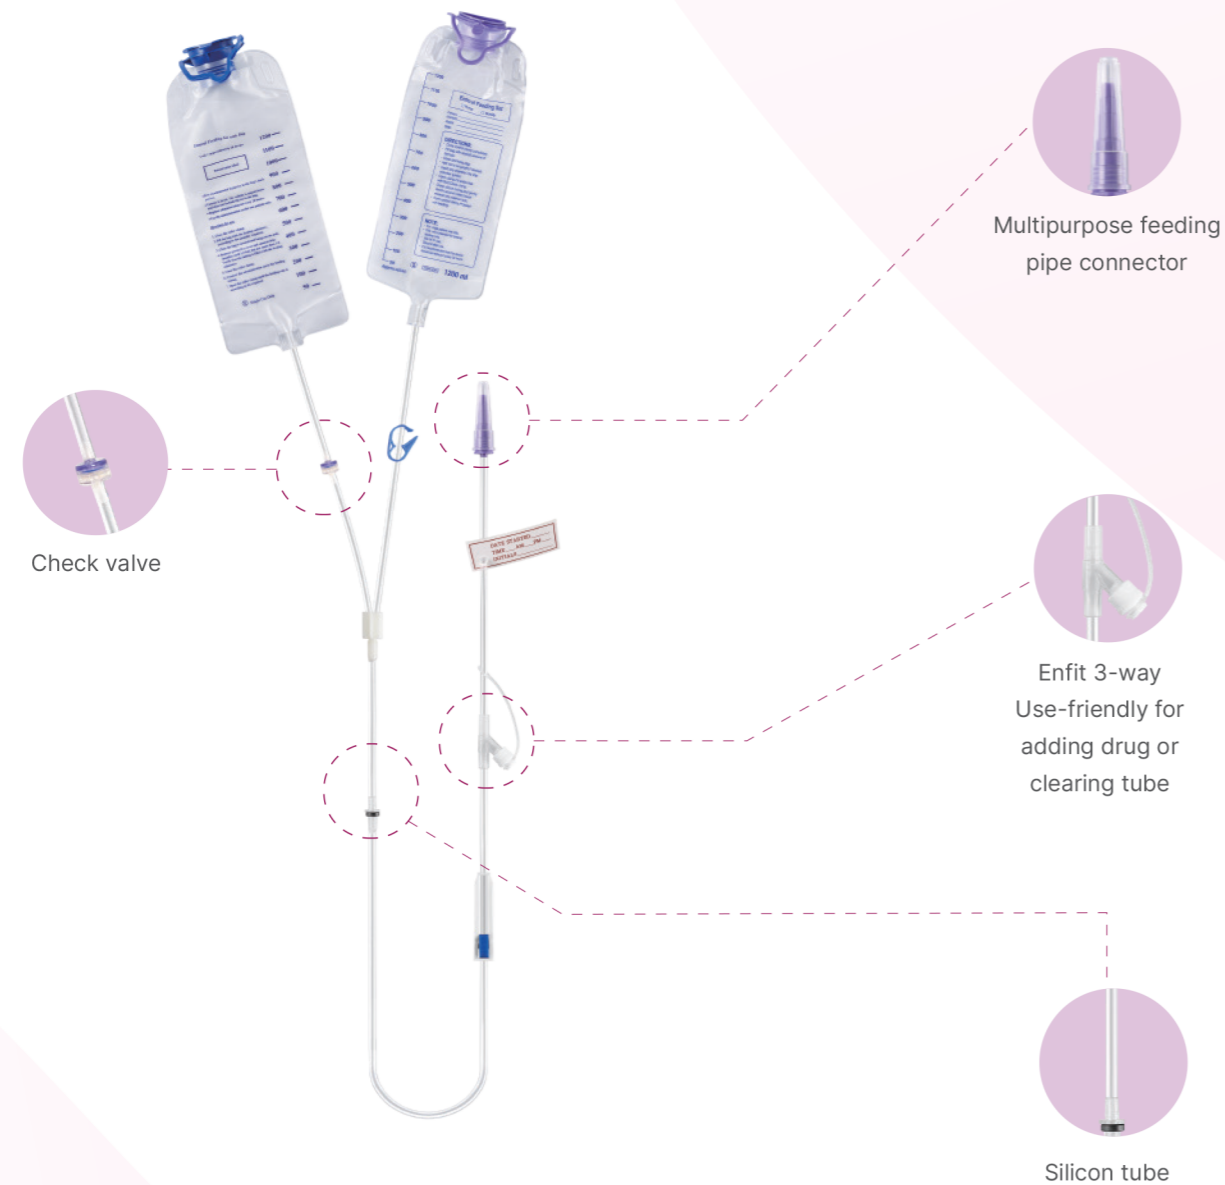

SURGICAL BIONICS

+91 79950 16459

info@surgicalbionics.in

www.surgicalbionics.in

H. NO. 7-2-1813/5/A/1, Flat No 510-W, Svss Nivas Czech Colony,
Sanath Nagar Hyderabad-500018, Telangana State



EASY TO USE SMART TO FEED

NUTRICARE

N300-H Enteral Feeding Pump



ver1.0

N300-H

N300-H, a smart pump, designed for single bag/double bags feeding with auto-flush function in hospital and homecare.




Easy to use and smart to feed, N300-H is simple-to-use and precise enteral feeding pump. Designed to deliver nutrition efficiently, N300-H provides intelligent feeding and programmable flushing which assure clinicians of accurate functions while offering patients better care.



Intuitive touch

3.5 inch touch screen, easy to learn interface, short learning curve



Safe

Visual & audible alarms and anti-free-flow system assure safe feeding



Fast

2 seconds of start-up,4 seconds of fluid loading and delivery



Ergonomic design

Compact light weight design of 0.8 kg allows easy moving and round shapes allows easy decontamination



Optional heater

Adjustable nutrition temperature improves patient comfort



Wireless interoperability

Connect to HK-M1000 infusion software to realize feeding monitoring anywhere, simplifying workflow

Specification

Model	N300-H
Pumping Mechanism	Rotary peristaltic
Feeding Mode	Continuous Feed,Intermittent Feed
Flow Rate Range	1-400ml/h in 1 increment
Volume to be delivered (VTBD)	(0.0, 1.0-9999.9)ml in 0.1ml increments;"0.0" means no feeding limit
Feeding volume accumulated	0.0-36000.0ml
Accuracy	±5%
BOLUS Rate	1-400ml/h in 1 increment
BOLUS Volume	(0.0, 1.0-100.0) ml
Purge Function	Auto Purge, Manual Purge (700~1200 ml/h in 1 ml/h increments; 0.0,1.0-9999.9 ml in 0.1 ml increments)
Flush Rate	1-400 ml/h in 1 ml/h increments
Flush Volume	(0.0, 1.0-9999.9)ml in 0.1ml increments
Back Pumping Function	Auto/Manual (1-400ml/h)
Occlusion Pressure	20~80 kPa in 7 adjustable levels
Battery Life	7000mAh :24h at 125ml/h, more than 24h at 25ml/h
Memory	More than 50000 records
Dimensions	145 (L) ×100(W)×94(H)
Weight	0.8kg (without pole clamp)
Input Power	120VA
Waterproof	IP24
Keep Tube Open (KTO)	0~30ml/h, in 1 ml/h increments
Alarm	Door open, Occlusion, Almost done, Forget operation, Infusion completion, Low Battery, Battery exhausted, malfunction etc.
Feeding Bag	Single bag/double bags
Air bubble detection	50 uL, 100uL, 250uL, 500uL, 800uL
Place of Usage	Support tabletop usage or IV pole mounting
Other Functions	WIFI, Dedicated tube, Nurse call, Heating