





**SMART VISION
FACTORY
COMPANY
LIMITED**

**ENCLOSURES
& CABINET**

WALLMOUNT ENCLOSURES SURFACE MOUNTED DISTRIBUTION BOARDS(IP54)



PARTS	THICKNESS H≤700	RAW MATERIAL	THICKNESS H≥700	PAINT
Carcass	1.00 mm	Sheet Metal (CCRS6112)	1.20 mm	RAL7035W Electrostatic Powder Coating
Bottom Cover	1.00 mm	Sheet Metal (CCRS6112)	1.20 mm	GASKET
Top Cover	1.00 mm	Sheet Metal (CCRS6112)	1.20 mm	Poliuretan Liquid Gasket
Front Door	1.00 mm	Sheet Metal (CCRS6112)	1.20 mm	PROTECTION
Mounting Plate	1.00 mm	Galvanized Sheet Metal	1.20 mm	IP54 - IK10
Main code of IP54 Wallmount Type Enclosure			SET - T - WI	
Dimension of Width in "CENTIMETER"			"50"	
Dimension of Height in "CENTIMETER"			"70"	
Dimension of Depth in "CENTIMETER"			"20"	





AVAILABLE DIMENSION
Width: 300-800mm Height: 400-1200mm Depth: 150-300mm
DOOR
Quarter Turn - Spring Loaded Locks and Corner Hinge or Concealed Hinge (Front Door can be open up to 180°)
OPTIONS
The enclosures have the ability to use both mounting plate and interior covers in the same body. No need to change the enclosure for different applications.

WALLMOUNT ENCLOSURES SURFACE MOUNTED DISTRIBUTION BOARDS (IP65)



PARTS	THICKNESS H≤700	RAW MATERIAL	THICKNESS H≥700	PAINT
Carcass	1.00 mm	Sheet Metal (CCRS6112)	1.20 mm	RAL7035W Electrostatic Powder Coating
Bottom Cover	1.00 mm	Sheet Metal (CCRS6112)	1.20 mm	GASKET
Top Cover	1.00 mm	Sheet Metal (CCRS6112)	1.20 mm	Poliuretlan Liquid Gasket
Front Door	1.00 mm	Sheet Metal (CCRS6112)	1.20 mm	PROTECTION
Mounting Plate	1.20 mm	Galvanized Sheet Metal	1.20 mm	IP65 - IK10
Main code of IP65 Wallmount Type Enclosure			SET - T - WHP	
Dimension of Width in "CENTIMETER"			"50"	
Dimension of Height in "CENTIMETER"			"70"	
Dimension of Depth in "CENTIMETER"			"20"	




AVAILABLE DIMENSION
Width: 300-800mm Height: 400-1200mm Depth: 150-300mm
DOOR
Quarter Turn - Spring Loaded Locks and Corner Hinge or Concealed Hinge (Front Door can be open up to 180°)
OPTIONS
The enclosures have the ability to use both mounting plate and interior covers in the same body. No need to change the enclosure for different applications.

WALLMOUNT ENCLOSURES SURFACE MOUNTED DISTRIBUTION BOARDS (IP65)



PARTS	THICKNESS H≤700	RAW MATERIAL	THICKNESS H≥700	PAINT
Carcass	1.00 mm	Sheet Metal (CCRS6112)	1.20 mm	RAL7035W Polyester Electrostatic Powder Coating
Bottom Cover	1.00 mm	Sheet Metal (CCRS6112)	1.20 mm	GASKET
Top Cover	1.00 mm	Sheet Metal (CCRS6112)	1.20 mm	Poliuretan Liquid Gasket
Front Door	1.00 mm	Sheet Metal (CCRS6112)	1.20 mm	PROTECTION
Mounting Plate	1.20 mm	Galvanized Sheet Metal	1.20 mm	IP65 - IK10
Main code of IP65 Wallmount Type Enclosure		SET - T - WHC		
Dimension of Width in "CENTIMETER"		"50"		
Dimension of Height in "CENTIMETER"		"70"		
Dimension of Depth in "CENTIMETER"		"20"		




AVAILABLE DIMENSION
Width: 300-800mm Height: 400-1200mm Depth: 150-300mm
DOOR
Quarter Turn - Spring Loaded Locks and Corner Hinge or Concealed Hinge (Front Door can be open up to 180°)
OPTIONS
The enclosures have the ability to use both mounting plate and interior covers in the same body. No need to change the enclosure for different applications.

WALLMOUNT ENCLOSURES WITH FLOOR BASE (IP55)



PARTS	THICKNESS	RAW MATERIAL	DOOR	
Carcass	1.50 mm	Sheet Metal	Quarter Turn - Spring Loaded Locks and Corner Hinge or Concealed Hinge (Front Door can be open up to 110°)	
Floor Base	1.50 mm	Sheet Metal		
Mounting Plate	1.50 mm	Galvanized Sheet Metal	PAINT	
			RAL7035W Electrostatic Powder Coating	
SET - T - DB	Main code of IP55 Wallmount Type Enclosure (with Floor base)		AVAILABLE DIMENSION	
“80”	Dimension of Width in “CENTIMETER”		Width: 300-800mm Height: 400-1200mm Depth: 150-180mm *Height dimensions includes 100 mm floorbase (H+H1)	
“110”	Dimension of Height in “CENTIMETER”			
“25”	Dimension of Depth in “CENTIMETER”		PROTECTION	IP55 - IK10

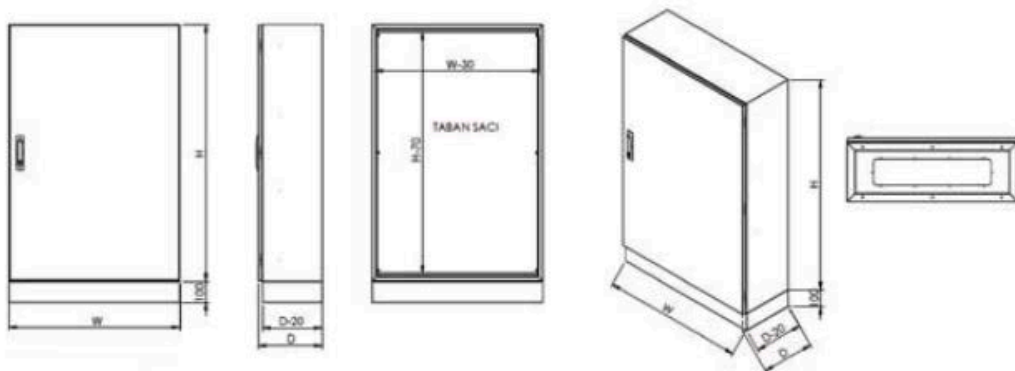

OPTIONS

The enclosures have the ability to use both mounting plate and interior covers in the same body. No need to change the enclosure for different applications.

WALLMOUNT ENCLOSURES DOUBLE DOOR WITH FLOOR BASE (IP55)



PARTS	THICKNESS	RAW MATERIAL	DOOR	
Carcass	1.50 mm	Sheet Metal	Front Door: Rod Latch Lock Systems and Concealed Hinge (Front Door can be open up to 110°)	
Floor Base	1.50 mm	Sheet Metal		
Mounting Plate	1.50 mm	Galvanized Sheet Metal	PAINT	
			RAL7035W Electrostatic Powder Coating	
SET - T - DD	Main code of IP55 Wallmount Type Enclosure (with Floor base)		AVAILABLE DIMENSION	
“100”	Dimension of Width in “CENTIMETER”		Width: 1000-1200mm Height: 1100-1500mm Depth: 250-300mm *Height dimensions includes 100 mm floorbase (H+H1)	
“110”	Dimension of Height in “CENTIMETER”			
“25”	Dimension of Depth in “CENTIMETER”		PROTECTION	IP55- IK10




OPTIONS

The enclosures have the ability to use both mounting plate and interior covers in the same body. No need to change the enclosure for different applications.

WALLMOUNT ENCLOSURES FLUSH MOUNTED BOARDS



PARTS	THICKNESS H≤700	RAW MATERIAL	THICKNESS H≥700	PAINT
Carcass	1.00 mm	Sheet Metal (CCRS6112)	1.20 mm	RAL7035W Electrostatic Powder Coating
Bottom Cover	1.00 mm	Sheet Metal (CCRS6112)	1.20 mm	GASKET
Top Cover	1.00 mm	Sheet Metal (CCRS6112)	1.20 mm	Poliuretan Liquid Gasket
Front Door	1.00 mm	Sheet Metal (CCRS6112)	1.20 mm	PROTECTION
Mounting Plate	1.20 mm	Galvanized Sheet Metal	1.20 mm	IP31 - IK10
Main code of IP31 Wallmount Type Enclosure			SET - T - WIS	
Dimension of Width in "CENTIMETER"			"50"	
Dimension of Height in "CENTIMETER"			"70"	
Dimension of Depth in "CENTIMETER"			"15"	

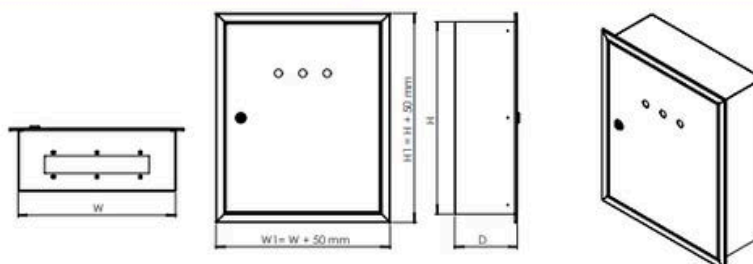

AVAILABLE DIMENSION
Width: 300-800mm Height: 400-1200mm Depth: 150-180mm
DOOR
Quarter Turn - Spring Loaded Locks and Corner Hinge or Concealed Hinge (Front Door can be open up to 180°)
OPTIONS
The enclosures have the ability to use both mounting plate and interior covers in the same body. No need to change the enclosure for different applications.

ACCESSORIES



ACCESSORIES



ROOMS MANAGEMENT BOXES




ROOMS MANAGEMENT BOXES



FREE STANDING MODULAR TYPE PANELS INDOOR TYPE (IP41)




PARTS	THICKNESS H≤1700	RAW MATERIAL	THICKNESS H≥1800	PAINT
Carcass	1.50 mm	Galvanized Sheet Metal	2.00 mm	RAL7035W Electrostatic Powder Coating
Front Door	2.00 mm	Sheet Metal (CCRS6112)	2.00 mm	GASKET
Back Door	1.20 mm	Sheet Metal (CCRS6112)	1.50 mm	Poliuretan Liquid Gasket
Side Cover	1.20 mm	Sheet Metal (CCRS6112)	1.50 mm	PROTECTION
Top Cover	1.20 mm	Sheet Metal (CCRS6112)	1.50 mm	IP41 - IK10
Bottom Cover	1.50 mm	Galvanized Sheet Metal	1.50 mm	AVAILABLE DIMENSIONS
Mounting Profile	2.00 mm	Galvanized Sheet Metal	2.00 mm	Widht: 400-800 mm Height: 1400-2100 mm Depth: 400-800 mm
Base Corner	2.00 mm	Sheet Metal (CCRS6112)	2.00 mm	*Height dimensions includes 100 mm Floorbase (H+H1)
Base Cover	1.20 mm	Sheet Metal (CCRS6112)	1.20 mm	DOOR
Mounting Plate	2.00 mm	Galvanized Sheet Metal	2.00 mm	Front Door: Rod Latch Lock Systems and Concealed Hinge (Front Door can be open up to 110°)
SET - D - FI				Main code of Free Standing Modular Type Panels IP41
"6"				Dimension of Width in "DECIMETER"
"20"				Dimension of Height in "DECIMETER"
"4"				Dimension of Depth in "DECIMETER"

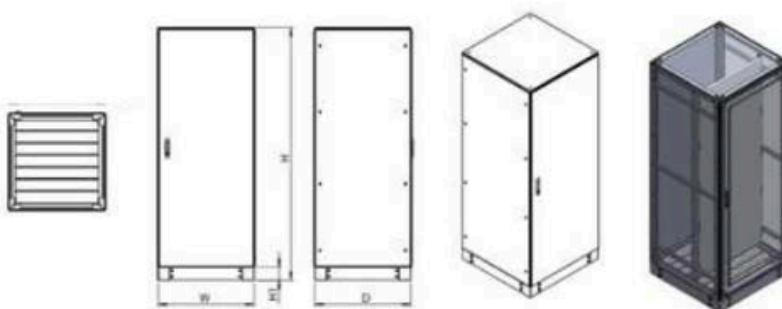

FREE STANDING MODULAR TYPE PANELS INDOOR TYPE (IP54)




PARTS	THICKNESS H≤1700	RAW MATERIAL	THICKNESS H≥1800	PAINT
Carcass	1.50 mm	Galvanized Sheet Metal	2.00 mm	RAL7035W Electrostatic Powder Coating
Front Door	2.00 mm	Sheet Metal (CCRS6112)	2.00 mm	GASKET
Back Door	1.20 mm	Sheet Metal (CCRS6112)	1.50 mm	Poliuretan Liquid Gasket
Side Cover	1.20 mm	Sheet Metal (CCRS6112)	1.50 mm	PROTECTION
Top Cover	1.20 mm	Sheet Metal (CCRS6112)	1.50 mm	IP54 - IK10
Bottom Cover	1.50 mm	Galvanized Sheet Metal	1.50 mm	AVAILABLE DIMENSIONS
Mounting Profile	2.00 mm	Galvanized Sheet Metal	2.00 mm	Width: 400-800 mm Height: 1400-2100 mm Depth: 400-800 mm
Base Corner	2.00 mm	Sheet Metal (CCRS6112)	2.00 mm	*Height dimensions includes 100 mm Floorbase (H+H1)
Base Cover	1.20 mm	Sheet Metal (CCRS6112)	1.20 mm	DOOR
Mounting Plate	2.00 mm	Galvanized Sheet Metal	2.00 mm	Front Door: Rod Latch Lock Systems and Concealed Hinge (Front Door can be open up to 110°)
SET - D - FIP				Main code of Free Standing Modular Type Panels IP54
"6"				Dimension of Width in "DECIMETER"
"20"				Dimension of Height in "DECIMETER"
"4"				Dimension of Depth in "DECIMETER"

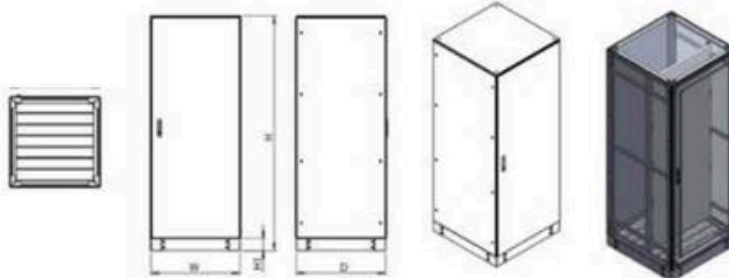

FREE STANDING MODULAR TYPE PANELS INDOOR TYPE (IP55)




PARTS	THICKNESS H≤1700	RAW MATERIAL	THICKNESS H≥1800	PAINT
Carcass	1.50 mm	Galvanized Sheet Metal	2.00 mm	RAL7035W Electrostatic Powder Coating
Front Door	2.00 mm	Sheet Metal (CCRS6112)	2.00 mm	GASKET
Back Door	1.20 mm	Sheet Metal (CCRS6112)	1.50 mm	Poliuretan Liquid Gasket
Side Cover	1.20 mm	Sheet Metal (CCRS6112)	1.50 mm	PROTECTION
Top Cover	1.20 mm	Sheet Metal (CCRS6112)	1.50 mm	IP55 - IK10
Bottom Cover	1.50 mm	Galvanized Sheet Metal	1.50 mm	AVAILABLE DIMENSIONS
Mounting Profile	2.00 mm	Galvanized Sheet Metal	2.00 mm	Width: 400-800 mm Height: 1400-2100 mm Depth: 400-800 mm
Base Corner	2.00 mm	Sheet Metal (CCRS6112)	2.00 mm	*Height dimensions includes 100 mm Floorbase (H+H1)
Base Cover	1.20 mm	Sheet Metal (CCRS6112)	1.20 mm	DOOR
Mounting Plate	2.00 mm	Galvanized Sheet Metal	2.00 mm	Front Door: Rod Latch Lock Systems and Concealed Hinge (Front Door can be open up to 110°)
Code System : EXP: SET-D-FH6204				SET - D - FH
Main c P55				"6"
Dimension of Width in "DECIMETER"				"20"
Dimension of Height in "DECIMETER"				"4"
Dimension of Depth in "DECIMETER"				

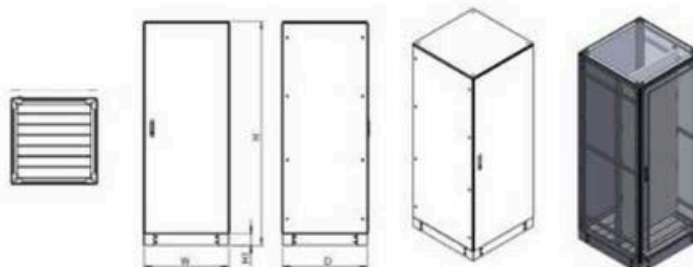

FREE STANDING MODULAR TYPE PANELS OUTDOOR TYPE (IP55)



PARTS	THICKNESS H≤1700	RAW MATERIAL	THICKNESS H≥1800	PAINT
Carcass	1.50 mm	Galvanized Sheet Metal	2.00 mm	RAL7035W Polyester Electrostatic Powder Coating
Front Door	2.00 mm	Sheet Metal (CCRS6112)	2.00 mm	GASKET
Back Door	1.20 mm	Sheet Metal (CCRS6112)	1.50 mm	Poliuretán Liquid Gasket
Side Cover	1.20 mm	Sheet Metal (CCRS6112)	1.50 mm	PROTECTION
Top Cover	1.20 mm	Sheet Metal (CCRS6112)	1.50 mm	IP55 - IK10
Bottom Cover	1.50 mm	Galvanized Sheet Metal	1.50 mm	AVAILABLE DIMENSIONS
Mounting Profile	2.00 mm	Galvanized Sheet Metal	2.00 mm	Width: 400-800 mm Height: 1400-2100 mm Depth: 400-800 mm
Base Corner	2.00 mm	Sheet Metal (CCRS6112)	2.00 mm	*Height dimensions includes 100 mm Floorbase (H+H1)
Base Cover	1.20 mm	Sheet Metal (CCRS6112)	1.20 mm	DOOR
Mounting Plate	2.00 mm	Galvanized Sheet Metal	2.00 mm	Front Door: Rod Latch Lock Systems and Concealed Hinge (Front Door can be open up to 110°)
Main code of Free Standing Modular Type Panels IP55				SET - D - FHC
Dimension of Width in "DECIMETER"				"6"
Dimension of Height in "DECIMETER"				"20"
Dimension of Depth in "DECIMETER"				"4"

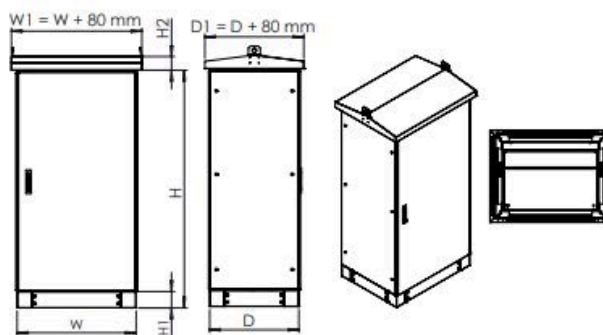


*H1 = 100 mm * H2 = 90 mm

FREE STANDING PANELS OUTDOOR TYPE (IP65)




PARTS	THICKNESS H≤1700	RAW MATERIAL	THICKNESS H≥1800	PAINT
Carcass	1.50 mm	Sheet Metal (CCRS6112)	2.00 mm	RAL7035W Polyester Electrostatic Powder Coating
Front Door	2.00 mm	Sheet Metal (CCRS6112)	2.00 mm	GASKET
Back Door	1.50 mm	Sheet Metal (CCRS6112)	1.50 mm	Poliuretano Liquid Gasket
Side Cover	1.50 mm	Sheet Metal (CCRS6112)	1.50 mm	PROTECTION
Top Cover	1.50 mm	Sheet Metal (CCRS6112)	1.50 mm	IP65 - IK10
Bottom Cover	1.50 mm	Galvanized Sheet Metal	1.50 mm	AVAILABLE DIMENSIONS
Mounting Profile	2.00 mm	Galvanized Sheet Metal	2.00 mm	Width: 400-800 mm Height: 1400-2100 mm Depth: 400-800 mm
Base Corner	2.00 mm	Sheet Metal (CCRS6112)	2.00 mm	*Height dimensions includes 100 mm Floorbase (H+H1)
Base Cover	1.20 mm	Sheet Metal (CCRS6112)	1.20 mm	DOOR
Mounting Plate	2.00 mm	Galvanized Sheet Metal	2.00 mm	Front Door: Rod Latch Lock Systems and Concealed Hinge
Optional Thickness up to 2.00 mm				(Front Door can be open up to 110°)
Main Code of Free Standing Modular Type Panels IP65				SET - D - FHP
Dimension of Width in "DECIMETER"				"4"
Dimension of Height in "DECIMETER"				"20"
Dimension of Depth in "DECIMETER"				"4"

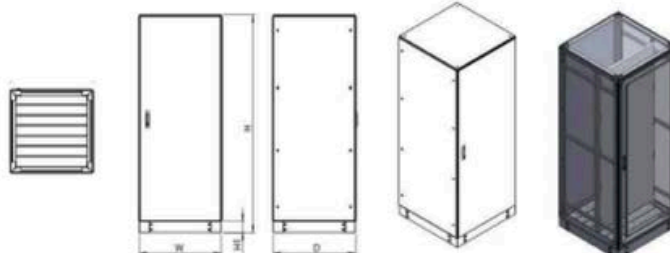

FREE STANDING PANELS (IP65)




PARTS	THICKNESS H≤1700	RAW MATERIAL	THICKNESS H≥1800	PAINT
Carcass	1,50 mm	Galvanized Sheet Metal	2,00 mm	RAL7035W Polyester Electrostatic Powder Coating
Front Door	2,00 mm	Sheet Metal (CCRS6112)	2,00 mm	GASKET
Back Door	1,20 mm	Sheet Metal (CCRS6112)	1,50 mm	Poliuretan Liquid Gasket
Side Cover	1,20 mm	Sheet Metal (CCRS6112)	1,50 mm	PROTECTION
Top Cover	1,20 mm	Sheet Metal (CCRS6112)	1,50 mm	IP65 - IK10
Bottom Cover	1,50 mm	Galvanized Sheet Metal	1,50 mm	AVAILABLE DIMENSIONS
Mounting Profile	2,00 mm	Galvanized Sheet Metal	2,00 mm	Width: 400-800 mm Height: 1400-2100 mm Depth: 400-800 mm
Base Corner	2,00 mm	Sheet Metal (CCRS6112)	2,00 mm	*Height dimensions includes 100 mm Floorbase (H+H1)
Base Cover	1,20 mm	Sheet Metal (CCRS6112)	1,20 mm	DOOR
Mounting Plate	2,00 mm	Galvanized Sheet Metal	2,00 mm	Front Door: Rod Latch Lock Systems and Concealed Hinge
Optional Thickness up to 2,00 mm				(Front Door can be open up to 110°)
Main Code of Free Standing Modular Type Panels IP55				SET - D - FHP
Dimension of Width in "DECIMETER"				"6"
Dimension of Height in "DECIMETER"				"20"
Dimension of Depth in "DECIMETER"				"4"

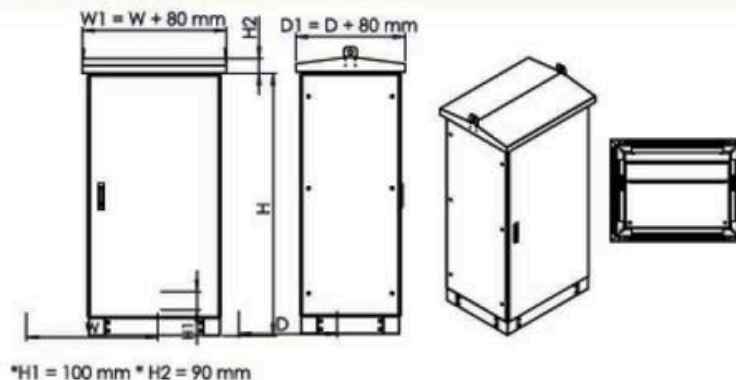

FREE STANDING MODULAR TYPE PANELS DOUBLE DOOR (IP41)




PARTS	THICKNESS H≤1700	RAW MATERIAL	THICKNESS H≥1800	PAINT
Carcass	1.50 mm	Sheet Metal (CCRS6112)	2.00 mm	RAL7035W Electrostatic Powder Coating
Front Door	2.00 mm	Sheet Metal (CCRS6112)	2.00 mm	GASKET
Back Door	1.50 mm	Sheet Metal (CCRS6112)	1.50 mm	Poliuretan Liquid Gasket
Side Cover	1.50 mm	Sheet Metal (CCRS6112)	1.50 mm	PROTECTION
Top Cover	1.50 mm	Sheet Metal (CCRS6112)	1.50 mm	IP41 - IK10
Bottom Cover	1.50 mm	Galvanized Sheet Metal	1.50 mm	AVAILABLE DIMENSIONS
Mounting Profile	2.00 mm	Galvanized Sheet Metal	2.00 mm	Width: 100-1600 mm Height: 1400-2100 mm Depth: 400-800 mm
Base Corner	2.00 mm	Sheet Metal (CCRS6112)	2.00 mm	*Height dimensions includes 100 mm Floorbase (H+H1)
Base Cover	1.20 mm	Sheet Metal (CCRS6112)	1.20 mm	DOOR
Mounting Plate	2.00 mm	Galvanized Sheet Metal	2.00 mm	Front Door: Rod Latch Lock Systems and Concealed Hinge (Front Door can be open up to 110°)
Optional Thickness up to 2.00 mm				
Main Code of Double Door IP41 Freestanding Enclosure				SET - D - DI
Dimension of Width in "DECIMETER"				10
Dimension of Height in "DECIMETER"				14
Dimension of Depth in "DECIMETER"				4

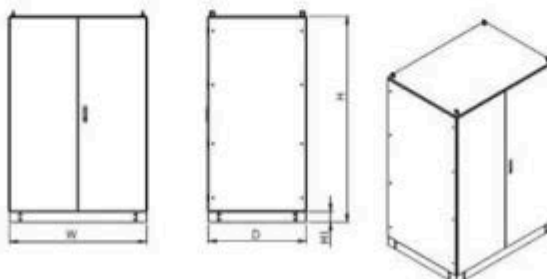

FREE STANDING MODULAR TYPE PANELS DOUBLE DOOR (IP55)



PARTS	THICKNESS H≤1700	RAW MATERIAL	THICKNESS H≥1800	PAINT
Carcass	1.50 mm	Sheet Metal (CCRS6112)	2.00 mm	RAL7035W Electrostatic Powder Coating
Front Door	2.00 mm	Sheet Metal (CCRS6112)	2.00 mm	GASKET
Back Door	1.50 mm	Sheet Metal (CCRS6112)	1.50 mm	Poliuretan Liquid Gasket
Side Cover	1.50 mm	Sheet Metal (CCRS6112)	1.50 mm	PROTECTION
Top Cover	1.50 mm	Sheet Metal (CCRS6112)	1.50 mm	IP55 - IK10
Bottom Cover	1.50 mm	Galvanized Sheet Metal	1.50 mm	AVAILABLE DIMENSIONS
Mounting Profile	2.00 mm	Galvanized Sheet Metal	2.00 mm	Width: 100-1600 mm Height: 1400-2100 mm Depth: 400-800 mm
Base Corner	2.00 mm	Sheet Metal (CCRS6112)	2.00 mm	*Height dimensions includes 100 mm Floorbase (H+H1)
Base Cover	1.20 mm	Sheet Metal (CCRS6112)	1.20 mm	DOOR
Mounting Plate	2.00 mm	Galvanized Sheet Metal	2.00 mm	Front Door: Rod Latch Lock Systems and Concealed Hinge
Optional Thickness up to 2.00 mm				(Front Door can be open up to 110°)
Main Code of Double Door IP55 Freestanding Enclosure				SET - D - DD
Dimension of Width in "DECIMETER"				"10"
Dimension of Height in "DECIMETER"				"14"
Dimension of Depth in "DECIMETER"				"4"

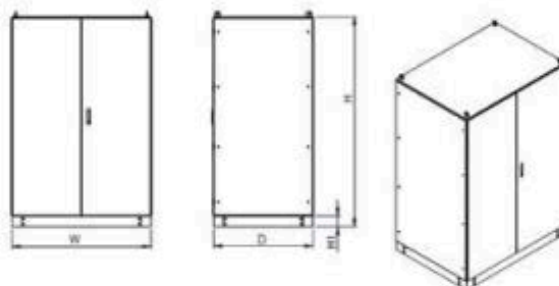


FREE STANDING MODULAR TYPE PANELS DOUBLE DOOR (IP55)



CONTENT LIST


- 1 - Top Cover
- 2 - Back & Side Cover (door)
- 3 - Front Door
- 4 - Floor Base Corner Part
- 5 - Floor Base Side Profile
- 6 - Upright Profile (Vertical)
- 7 - Horizontal Profile
- 8 - Rail Carrier
- 9 - Side Support
- 10 - Cargass Corner Wedge (Connection Part)
- 11 - Bottom Cover (Gland Plate)
- 12 - Interior Cover Profile (Upright)
- 13 - Interior Cover Profile (Horizontal)
- 14 - MCB Cover Plate
- 15 - MCCB Cover Plate
- 16 - Cover Plate (Imperforated)
- 17 - Mounting Plate (Full)
- 18 - Mounting Plate (Pieced)
- 19 - Interior Mounting Profile
- 20 - Eyebolt (M12)

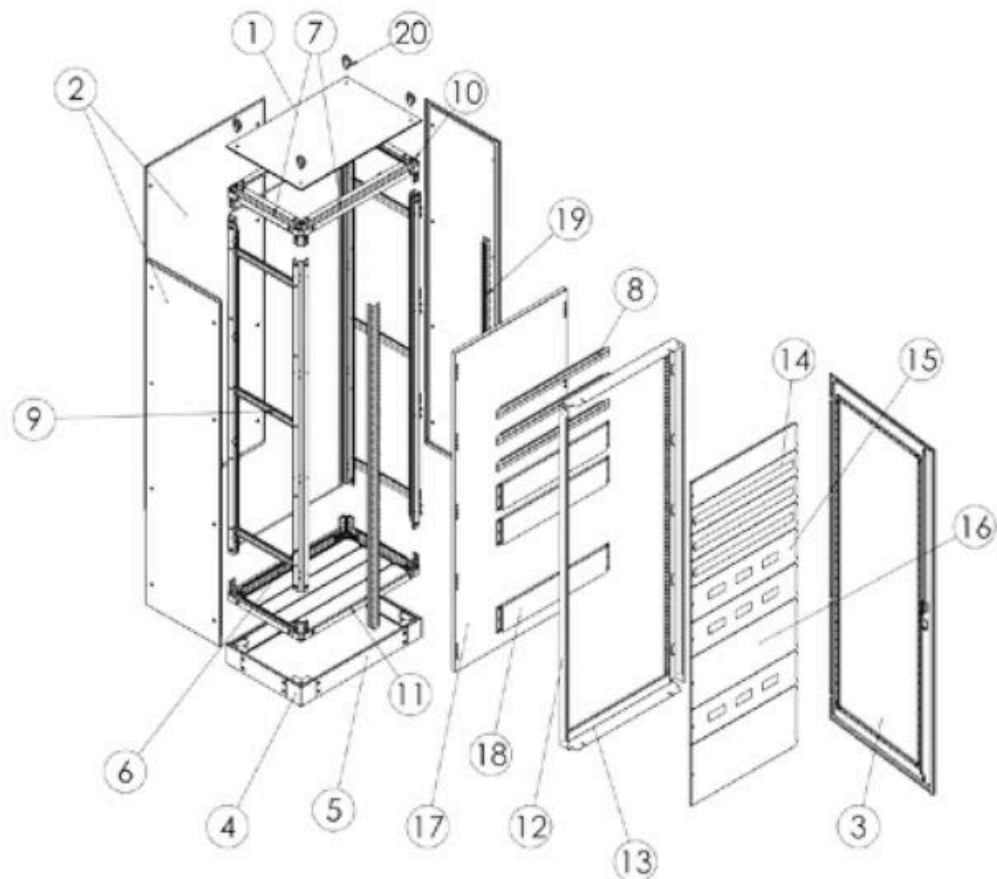

FREE STANDING MODULAR TYPE PANELS FRONT DOOR WITH GLASS ACCESSORIES



SVC-RFQ SERIE IP44 (FAN)

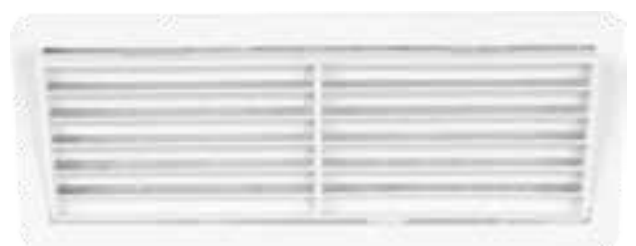

SVC-RFQ SERIE IP44 (FAN)



BIMETALIC THERMOSTATS AND DOUBLE THERMOSTATS



Bimetalic thermostats especially suitable for controlling fan and filter units , heaters. This thermostat can also be used as a signal generator for monitoring the enclosure internal temperature.

QHT NO : Thermost (Normally open) ; contact regulating of filter

fans and heat exchangers.

QHT NC: Thermost (Normally closed) ; contact breaker for regulating cabinet heaters.

- Large setting range.
- Compact desing.
- Mounting on 35 mm DIN rail.
- High seitching capacity (10 A).
- Safe electrical connection.
- Space saving sizes.
- Sensor Element : Thermostatic bi metal.
- Contact Type : Snap-action contact
- Switching Current : 230 VAC 10A
- Case Material : Plastic according UL94 V-0
- Protection Class : IP20
- Approval : Fit 35mm DIN
- Electrical Connect rail terminal : 0,75 - 1.5 mm 2 2 poles
- Mounting : 63 x 34 x 42 mm
- Dimensions: 0.45 gr.

Bimetalic thermostats especially suitable for controlling fan and filter units , heaters. This thermostat can also be used as a signal generator for monitoring the enclosure internal temperature.





QHT NO : Thermost (Normally open) ; contact regulating of filter fans and heat exchangers.

QHT NC: Thermost (Normally closed) ; contact breaker for regulating cabinet heaters.

- Large setting range.
- Compact desing.
- Mounting on 35 mm DIN rail.
- High seitching capacity (10 A).
- Safe electrical connection.
- Space saving sizes.
- Sensor Element : Thermostatic bi metal.
- Contact Type : Snap-action contact
- Switching Current : 230 VAC 10A
- Case Material : Plastic according UL94 V-0
- Protection Class : IP20
- Approval : Fit 35mm DIN
- Electrical Connect rail terminal : 0,75 - 1.5 mm 2 2 poles
- Mounting : 63 x 59 x 42 mm
- Dimensions: 0.82 gr.

VOLTAGE (V)	FREQUENCY (HZ)	SENSOR ELEMENT	CONTACT TYPE	CURRENT	IP	SIZE	MOUNTING	CONNECTIONS
110-220V	50	Bimetalic thermostats	NO	10A	IP20	63x34x42	DIN35RAY	0,75 -1,5
110-220V	50	Bimetalic thermostats	NC	10A	IP20	63x34x42	DIN35RAY	0,75 -1,5
VOLTAGE (V)	FREQUENCY (HZ)	SENSOR ELEMENT	CONTACT TYPE	CURRENT	IP	SIZE	MOUNTING	CONNECTIONS
110-220V	50	Bimetalic thermostats	NO/NC	10A	IP20	63x59x42	DIN35RAY	2,5mm

CONTROL PANELS

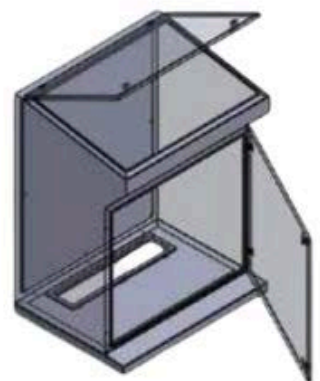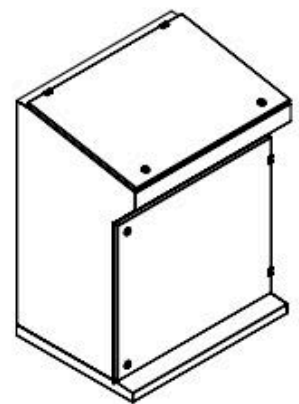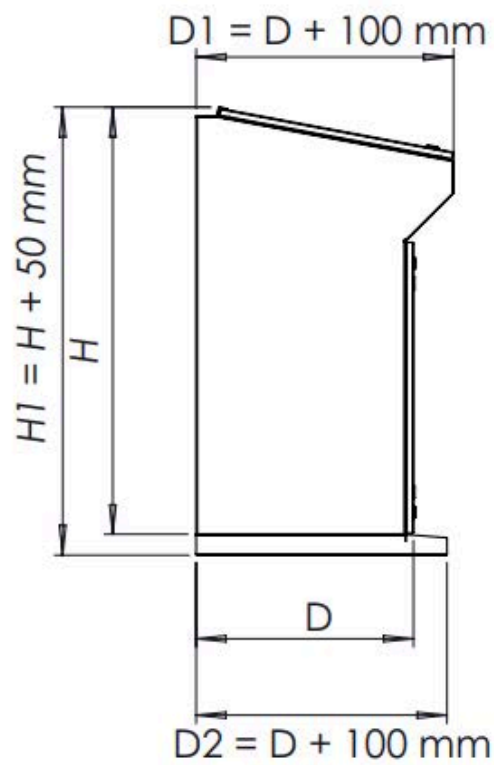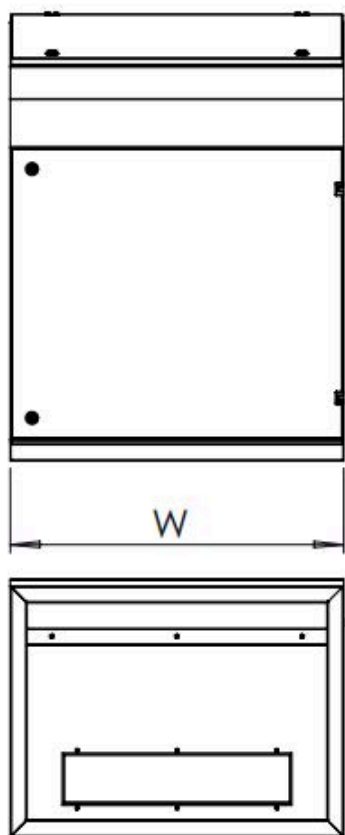

MCC AND COMPENSATION PANELS



MAIN DISTRIBUTION BOARDS



FREE STANDING RACK CABINETS



PARTS	THICKNESS	RAW MATERIAL
Carcass	1.50 mm	Galvanized Sheet Metal (GZRS1311)
Front Door	1.50 mm	Sheet Metal (CCRS6112)
Back Door	1.20 mm	Sheet Metal (CCRS6112)
Side Cover	1.00 mm	Sheet Metal (CCRS6112)
Top Cover	1.20 mm	Sheet Metal (CCRS6112)
Bottom Cover	1.50 mm	Galvanized Sheet Metal (GZRS1311)
19° Interior Pillar	1.20 mm	Galvanized Sheet Metal (GZRS1311)
Fan Module	1.20 mm	Sheet Metal (CCRS6112)
Bottom Closure	1.20 mm	Sheet Metal (CCRS6112)
Cable Organizer	1.20 mm	Galvanized Sheet Metal (GZRS1311)
PAINT		
RAL7016 / RAL7021 Electrostatic Powder Coating		
DOOR		
Front Door: Rod Latch Lock Systems (Front door can be open up to 130°) Back and Side Doors: Quarter Turn - Spring Loaded Locks and Concealed Hinge		
PROTECTION		
IP21 - IK10		


FREE STANDING
RACK CABINETS

SN	PRODUCT CODE	DIMENSIONS (mm)		
		W	H	D
1	SET-R-F-644U60	600	44U	600
2	SET-R-F-642U60		42U	
3	SET-R-F-640U60		40U	
4	SET-R-F-636U60		36U	
5	SET-R-F-632U60		32U	
6	SET-R-F-628U60		28U	
7	SET-R-F-624U60		24U	
8	SET-R-F-644U80	600	44U	800
9	SET-R-F-642U80		42U	
10	SET-R-F-640U80		40U	
11	SET-R-F-636U80		36U	
12	SET-R-F-632U80		32U	
13	SET-R-F-628U80		28U	
14	SET-R-F-624U80		24U	

SN	PRODUCT CODE	DIMENSIONS (mm)		
		W	H	D
15	SET-R-F-844U80	800	44U	
16	SET-R-F-842U80		42U	
17	SET-R-F-840U80		40U	
18	SET-R-F-836U80		36U	
19	SET-R-F-832U80		32U	
20	SET-R-F-644U10			
21	SET-R-F-642U10	600	44U	
22	SET-R-F-640U10		42U	
23	SET-R-F-844U10		40U	
24	SET-R-F-842U10			
25	SET-R-F-840U10		44U	
		800	42U	
			40U	

ACCESSORIES



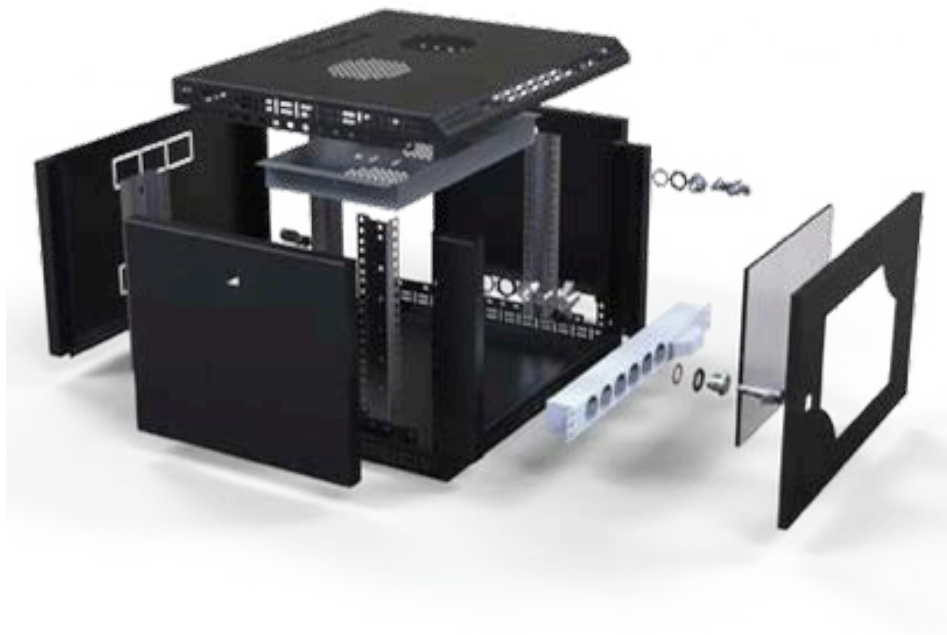

PARTS	THICKNESS	RAW MATERIAL
Side Cover	1.00 mm	Sheet Metal (CCRS6112)
Back Cover	1.20 mm	Sheet Metal (CCRS6112)
Bottom Cover	1.20 mm	Sheet Metal (CCRS6112)
Top Cover	1.20 mm	Sheet Metal (CCRS6112)
Fan Module	1.20 mm	Sheet Metal (CCRS6112)
Cable Organizer	1.20 mm	Sheet Metal (CCRS6112)
Front Door	1.50 mm	Sheet Metal (CCRS6112)
Front Pillar	1.50 mm	Sheet Metal (CCRS6112)
19° Interior Pillar	1.50 mm	Galvanized Sheet Metal (GZRS1311)
PAINT		
RAL7021 Electrostatic Powder Coating		
DOOR		
Front Door: Rod Latch Lock Systems (Front door can be open up to 130°) Back and Side Doors: Quarter Turn - Spring Loaded Locks and Concealed Hinge		
PROTECTION		
IP20 - IK08		



THANK YOU

TO OUR EMPLOYEES, YOUR HARD WORK AND DEDICATION ARE GREATLY APPRECIATED. TO OUR PARTNERS, THANK YOU FOR YOUR COLLABORATION AND TRUST. AND TO OUR READERS, WE HOPE THIS DOCUMENT PROVIDES VALUABLE INSIGHTS INTO OUR EFFORTS TOWARDS A SUSTAINABLE FUTURE. TOGETHER, WE ARE MAKING A SIGNIFICANT IMPACT IN THE REALM OF RENEWABLE ENERGY.

VERSION 2024 ENGLISH
SVC COMPANY CO.,LTD
SVC (RIYADH)CO.,LTD
EMAIL: A.HIASAT@SVISIONS.NET
O.ALHUSSEIN@SVISIONS.NET



SAUDI ARABIA- RIYADH -EXIT 18



WWW.SVC.COM.SA

