



**SMART VISION
FACTORY
COMPANY
LIMITED**

**INTELLIGENT
COMMUNICATION
EQUIPMENT**

OUTDOOR CABINET

REGULAR OUTDOOR CABINET

Application

Our products are widely used in finance, transportation, communication, advertising, broadcasting, meteorology, environmental monitoring, energy power and other industrial fields


Product features

Protection grade IP55, Dust-proof, Waterproof and Thermal insulation performance, intelligent power supply, Intelligent constant temperature, alarm data upload in time, data visualization, intelligent analysis, high reliability, can be used in extremely cold and hot areas, and maintenance free for 5-10 years


Model	ODC-136565-SVC-01	ODC-167575-SVC-01	ODC-219090-SVC-01
External Size (H*W*D)	300*650*650mm	1600*750*750mm	2100*900*900mm
Internal Size (H*W*D)	1100*600*600mm	1400*650*650mm	1800*800*800mm
Material	Matel Sheet/Stainless Steel		
Door	IP55		
Themal Solution	Air Condition/Fan		
Protection Level	Equipment Rack/Battery Rack/Multi-Equipment Rack		
Rcak	Floor		
Mount	CNTCE		
Brand	Option Items		
Option Items			
AC Air Condition	600W/1500W		
Switch Power	200A		
Battery	Li-Iron/Lead-Acid 100Ah, 150Ah、 200Ah		




OUTDOOR CABINET SINGLE HOUSING CABINET

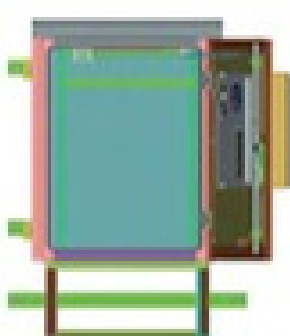


Model	ODC-107070-SVC
Cabinet Size	external Size: 895*655*550mm
(H×W×DE)	Internal Size: 895*655*550mm
Cabinet Mate	Droplaute SPCC + 20mm PEF Insulation cotton

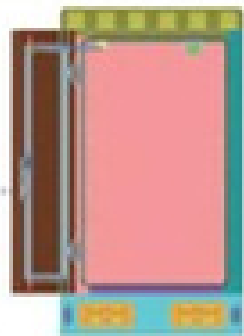


Model	ODC-126060-SVC-01
Cabinet Size	external Size: 1200*600*600mm
(H×W×DE)	Internal Size: 965*595*570mm
Cabinet Material	Single SPCC

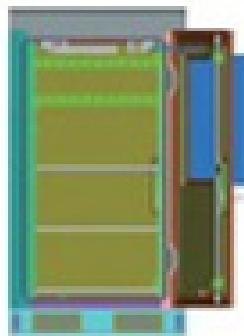


Model	ODC-126565-SVC-01
Cabinet Size	external Size: 1200*650*650mm
(H×W×DE)	Internal Size: 1000*605*595mm
Cabinet Material	Droplaute SPCC + 20mm PEF Insulation cotton

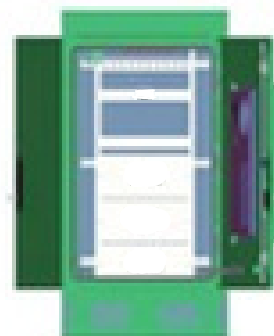


Model	ODC-126565-SVC-01
Cabinet Size	external Size: 1200*650*650mm
(H×W×DE)	Internal Size: 1000*605*595mm
Cabinet Material	Droplaute SPCC + 20mm PEF Insulation cotton

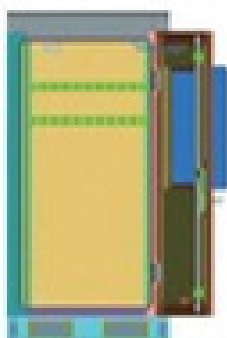


Model	ODC-136565-SVC-01
Cabinet Size	external Size: 1300*650*650mm
(H×W×DE)	Internal Size: 1100*600*600mm
Cabinet Material	Droplaute SPCC + 20mm PEF Insulation cotton

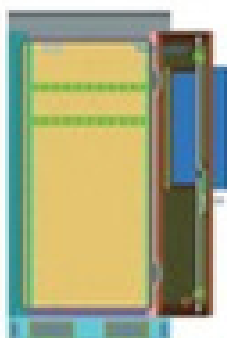


Model	ODC-136565-SVC-01
Cabinet Size	external Size: 1300*650*650mm
(H×W×DE)	Internal Size: 1100*600*600mm
Cabinet Material	Droplaute SPCC + 20mm PEF Insulation cotton

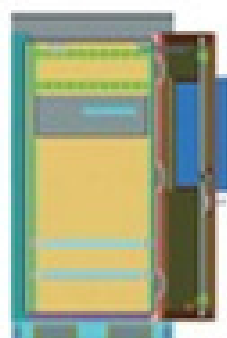


Model	ODC-146565-SVC-01
Cabinet Size	external Size: 1400*650*650mm
(H×W×DE)	Internal Size: 1150*605*600mm
Cabinet Material	Droplaute SPCC + 20mm PEF Insulation cotton

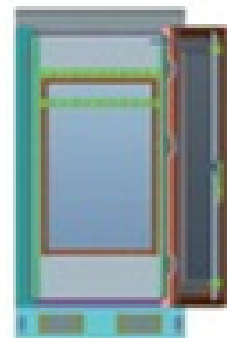


Model	ODC-146565-SVC-01
Cabinet Size	external Size: 1400*650*650mm
(H×W×DE)	Internal Size: 1150*605*600mm
Cabinet Material	Droplaute SPCC + 20mm PEF Insulation cotton

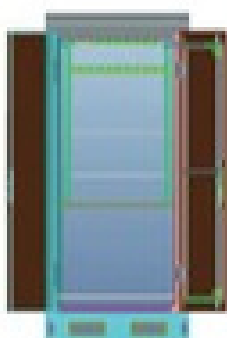


Model	ODC-156565-SVC-01
Cabinet Size	external Size: 1500*650*650mm
(H×W×DE)	Internal Size: 1200*605*600mm
Cabinet Material	Cabinet Mate: Droplaute SPCC + 20mm PEF Insulation cotton



Model	ODC-157070-SVC-01
Cabinet Size	external Size: 1500*700*700mm
(H×W×DE)	Internal Size: 1100*655*635mm
Cabinet Material	Single SPCC




Model	ODC-167575-SVC-01
Cabinet Size	external Size: 1600*750*750mm
(H×W×DE)	Internal Size: 1300*705*700mm
Cabinet Material	Friacale SPCC + 40mm PEF + Sandwich board




Model	ODC-167575-SVC-01
Cabinet Size	external Size: 1600*750*750mm
(H×W×DE)	Internal Size: 1300*705*700mm
Cabinet Material	Friacale SPCC + 40mm PEF + Sandwich board

OUTDOOR CABINET


SINGLE HOUSING CABINET




Model	ODC-161090-SVC-01
Cabinet Size (H×W×D)	External Size: 1680×1000×900mm Internal Size: 1450×955×845mm
Cabinet Material	Double SPCC + 20mm PEF Insulation cotton




Model	ODC-188080-SVC-01
Cabinet Size (H×W×D)	External Size: 1800×800×800mm Internal Size: 1585×755×750mm
Cabinet Material	Double SPCC + 20mm PEF Insulation cotton




Model	ODC-177080-SVC-01
Cabinet Size (H×W×D)	External Size: 1770×700×800mm Internal Size: 1515×655×746mm
Cabinet Material	Double SPCC + 20mm PEF Insulation cotton




Model	ODC-188080-SVC-01
Cabinet Size (H×W×D)	External Size: 1800×800×800mm Internal Size: 1585×755×750mm
Cabinet Material	Double SPCC + 20mm PEF Insulation cotton




Model	ODC-188080-SVC-01
Cabinet Size (H×W×D)	External Size: 1800×800×800mm Internal Size: 1585×755×750mm
Cabinet Material	Double SPCC + 20mm PEF Insulation cotton




Model	ODC-188080-SVC-02
Cabinet Size (H×W×D)	External Size: 1800×800×800mm Internal Size: 1615×755×750mm
Cabinet Material	Double SPCC + 20mm PEF Insulation cotton




Model	ODC-207070-SVC-01
Cabinet Size (H×W×D)	External Size: 2000×700×700mm Internal Size: 1765×655×650mm
Cabinet Material	Double SPCC + 20mm PEF Insulation cotton




Model	ODC-207070-SVC-02
Cabinet Size (H×W×D)	External Size: 2000×700×700mm Internal Size: 1765×625×670mm
Cabinet Material	Single SPCC




Model	ODC-208080-SVC-01
Cabinet Size (H×W×D)	External Size: 2080×800×800mm Internal Size: 1775×795×750mm
Cabinet Material	Single SPCC



Model	ODC-208080-SVC-02
Cabinet Size (H×W×D)	External Size: 2000×800×800mm Internal Size: 1765×795×750mm
Cabinet Material	Double SPCC + 20mm PEF Insulation cotton




Model	ODC-209080-SVC-01
Cabinet Size (H×W×D)	External Size: 2050×900×800mm Internal Size: 1580×750×695mm
Cabinet Material	Double SPCC + 75mm PEF Insulation cotton




Model	ODC-208686-SVC-01
Cabinet Size (H×W×D)	External Size: 2020×860×860mm Internal Size: 1795×795×805mm
Cabinet Material	Double SPCC + 30mm PEF Insulation cotton

OUTDOOR CABINET


SINGLE HOUSING CABINET

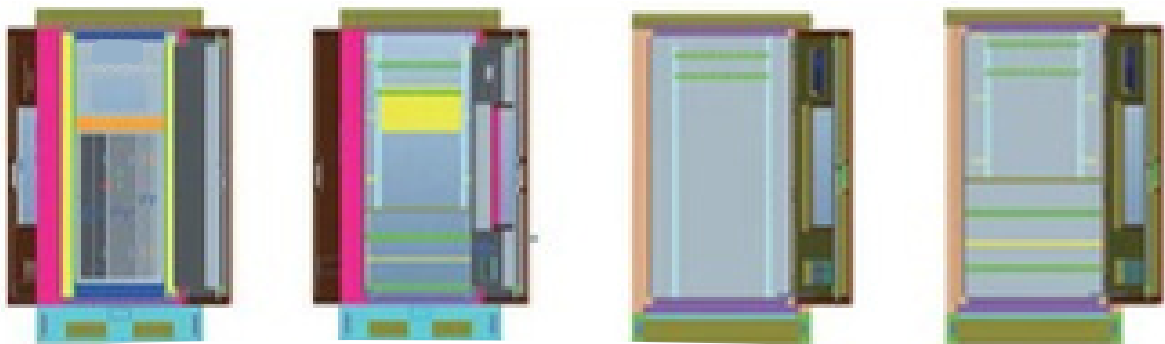

Model	ODC-219090-SVC-01	Model	ODC-219090-SVC-02	Model	ODC-219090-SVC-02	Model	ODC-226080-SVC-01
Cabinet Size (H×W×D)	External Size: 2150×900×900mm Internal Size: 1800×695×695mm	Cabinet Size (H×W×D)	External Size: 2100×900×900mm Internal Size: 1805×805×825mm	Cabinet Size (H×W×D)	External Size: 2100×900×900mm Internal Size: 1805×805×825mm	Cabinet Size (H×W×D)	External Size: 2200×600×800mm Internal Size: 1890×555×745mm
Cabinet Material	Double SPCC + 100mm PEF Insulation cotton	Cabinet Material	Frame SPCC + 45mm EPS Sandwich board	Cabinet Material	Frame SPCC + 45mm EPS Sandwich board	Cabinet Material	Double SPCC + 20mm PEF Insulation cotton

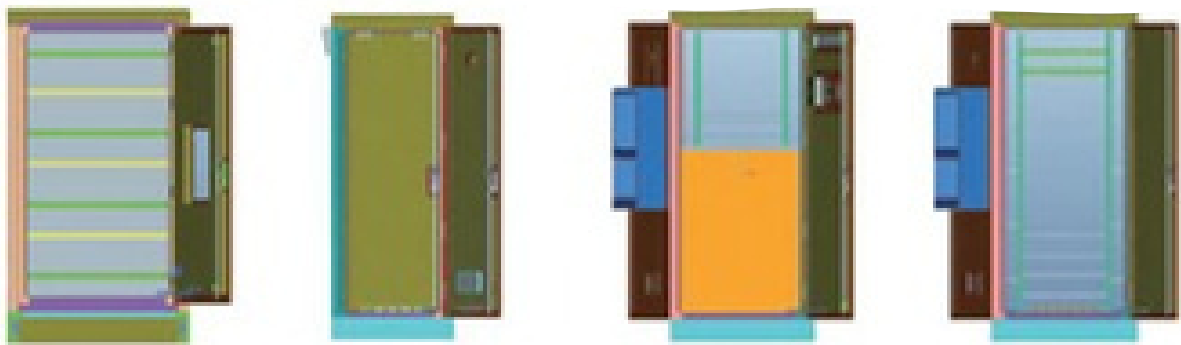


Model	ODC-226080-SVC-01	Model	ODC-226010-SVC-01	Model	ODC-251070-SVC-01	Model	ODC-251070-SVC-02
Cabinet Size (H×W×D)	External Size: 2200×800×800mm Internal Size: 1890×755×745mm	Cabinet Size (H×W×D)	External Size: 2200×600×1000mm Internal Size: 1890×555×945mm	Cabinet Size (H×W×D)	External Size: 2500×1000×700mm Internal Size: 2100×950×650mm	Cabinet Size (H×W×D)	External Size: 2500×1000×700mm Internal Size: 2100×950×650mm
Cabinet Material	Double SPCC + 20mm PEF Insulation cotton	Cabinet Material	Double SPCC + 20mm PEF Insulation cotton	Cabinet Material	Double SPCC + 20mm PEF Insulation cotton	Cabinet Material	Double SPCC + 20mm PEF Insulation cotton

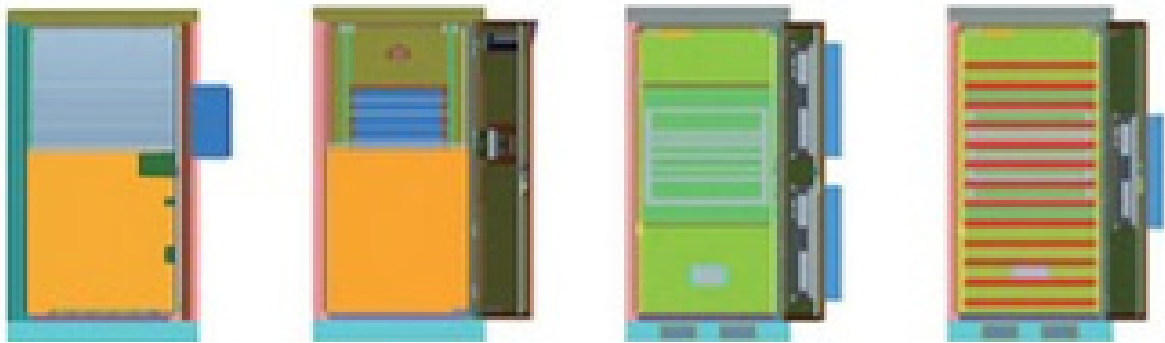


Model	ODC-219090-SVC-01	Model	ODC-219090-SVC-01	Model	ODC-219090-SVC-02	Model	ODC-219090-SVC-02
Cabinet Size (H×W×D)	External Size: 2150×900×900mm Internal Size: 1800×695×695mm	Cabinet Size (H×W×D)	External Size: 2150×900×900mm Internal Size: 1800×695×695mm	Cabinet Size (H×W×D)	External Size: 2100×900×900mm Internal Size: 1805×805×825mm	Cabinet Size (H×W×D)	External Size: 2100×900×900mm Internal Size: 1805×805×825mm
Cabinet Material	Double SPCC + 100mm PEF Insulation cotton	Cabinet Material	Double SPCC + 100mm PEF Insulation cotton	Cabinet Material	Frame SPCC + 45mm EPS Sandwich board	Cabinet Material	Frame SPCC + 45mm EPS Sandwich board

OUTDOOR CABINET


DOUBLE HOUSING CABINET

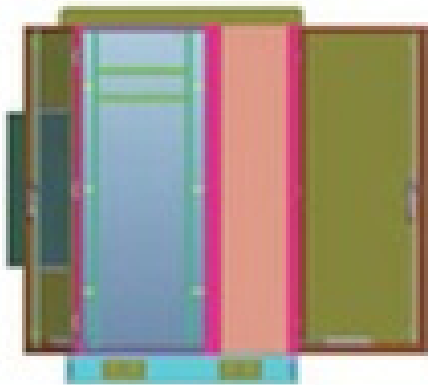


Model	ODC-107070-SVC
Cabinet Size (H×W×D)	External Size: 1050×700×700mm Internal Size: 895×655×550mm
Cabinet Material	Double SPCC + 20mm PEF Insulation cotton

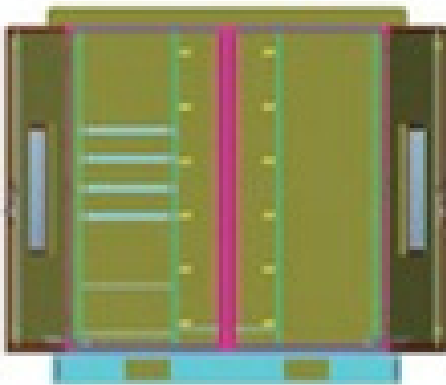


Model	ODC-126060-SVC-01
Cabinet Size (H×W×D)	External Size: 1200×600×600mm Internal Size: 965×595×570mm
Cabinet Material	Single SPCC

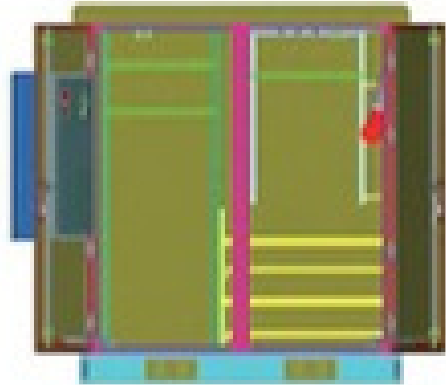


Model	ODC-126565-SVC-01
Cabinet Size (H×W×D)	External Size: 1200×650×650mm Internal Size: 1000×605×595mm
Cabinet Material	Double SPCC + 20mm PEF Insulation cotton

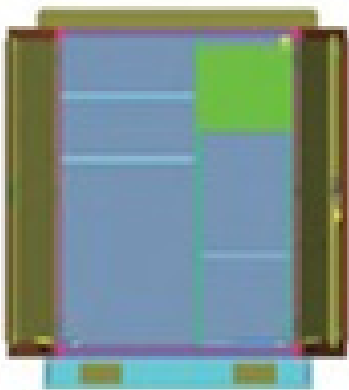


Model	ODC-128585-SVC-01
Cabinet Size (H×W×D)	External Size: 1250×850×850mm Internal Size: 1000×800×800mm
Cabinet Material	Double SPCC + 20mm PEF Insulation cotton

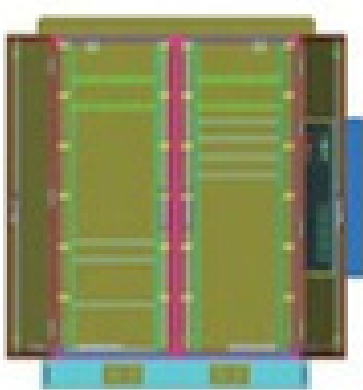


Model	ODC-136565-SVC-01
Cabinet Size (H×W×D)	External Size: 1300×650×650mm Internal Size: 1100×600×600mm
Cabinet Material	Double SPCC + 20mm PEF Insulation cotton

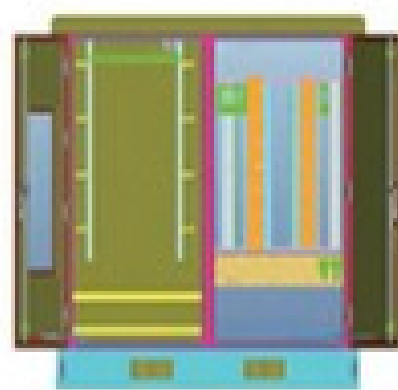


Model	ODC-136565-SVC-01
Cabinet Size (H×W×D)	External Size: 1300×650×650mm Internal Size: 1100×600×600mm
Cabinet Material	Double SPCC + 20mm PEF Insulation cotton

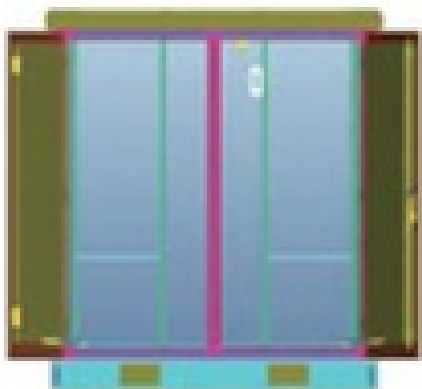

Model	ODC-136585-SVC-01
Cabinet Size (H×W×D)	External Size: 1300×650×850mm Internal Size: 1100×600×800mm
Cabinet Material	Double SPCC + 20mm PEF Insulation cotton

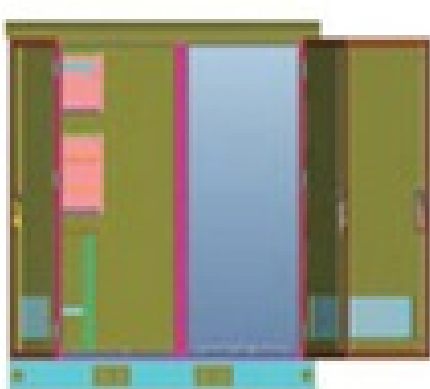


Model	ODC-146565-SVC-01
Cabinet Size (H×W×D)	External Size: 1400×650×650mm Internal Size: 1150×605×600mm
Cabinet Material	Double SPCC + 20mm PEF Insulation cotton

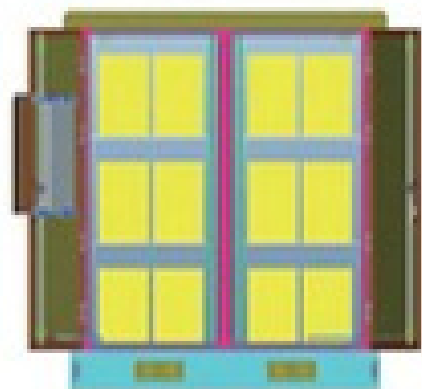


Model	ODC-156565-SVC-01
Cabinet Size (H×W×D)	External Size: 1500×650×650mm Internal Size: 1200×605×600mm
Cabinet Material	Double SPCC + 20mm PEF Insulation cotton

OUTDOOR CABINET


MULTI-HOUSING CABINET

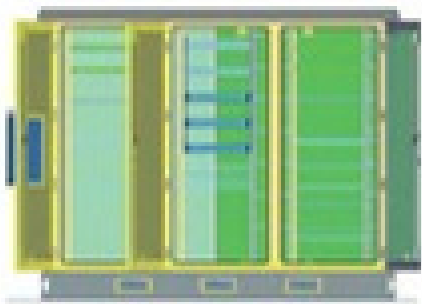


Model	ODC-157070-SVC-01
Cabinet Size (H×W×D)	External Size: 1500×700×700mm Internal Size: 1100×655×635mm
Cabinet Material	Single SPCC

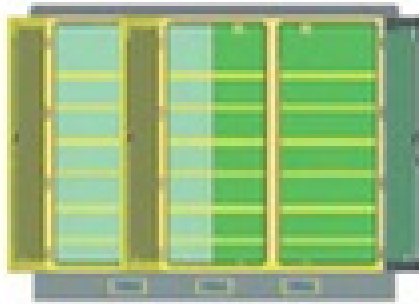


Model	ODC-167575-SVC-01
Cabinet Size (H×W×D)	External Size: 1600×750×750mm Internal Size: 1300×705×700mm
Cabinet Material	Frame SPCC + 40mm PEF + Sandwich board

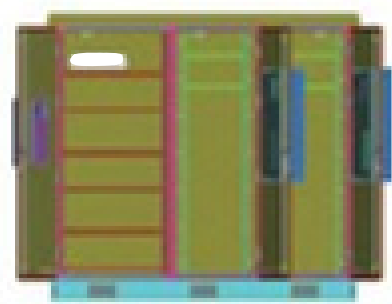


Model	ODC-167575-SVC-01
Cabinet Size (H×W×D)	External Size: 1600×750×750mm Internal Size: 1300×705×700mm
Cabinet Material	Frame SPCC + 40mm PEF + Sandwich board

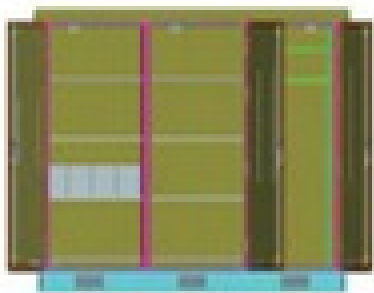

Model	ODC-167575-SVC-01
Cabinet Size (H×W×D)	External Size: 1600×750×750mm Internal Size: 1300×705×700mm
Cabinet Material	Frame SPCC + 40mm PEF + Sandwich board

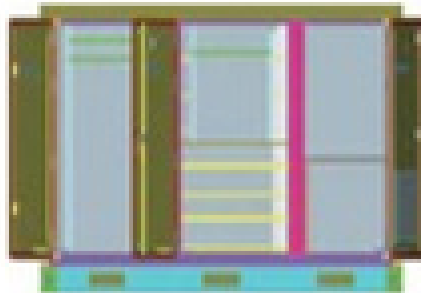


Model	ODC-188080-SVC-01
Cabinet Size (H×W×D)	External Size: 1800×800×800mm Internal Size: 1500×755×735mm
Cabinet Material	Frame SPCC + 40mm PEF + Sandwich board

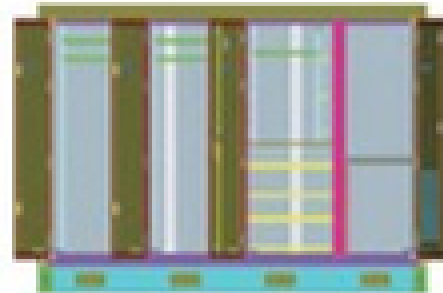

Model	ODC-208080-SVC-01
Cabinet Size (H×W×D)	External Size: 2000×800×800mm Internal Size: 1700×755×735mm
Cabinet Material	Single SPCC


BEAUTIFICATION CABINET

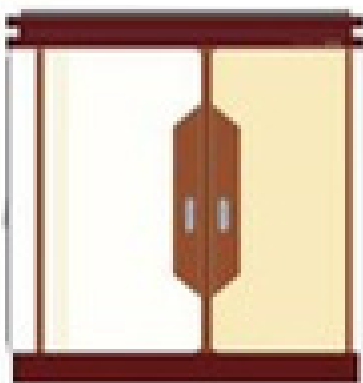

Model	ODC-156565-SVC-01
Cabinet Size (H×W×D)	External Size: 1500×650×650mm Internal Size: 1200×605×600mm
Cabinet Material	Double SPCC + 20mm PEF Insulation cotton



Model	ODC-146565-SVC-01
Cabinet Size (H×W×D)	External Size: 1400×650×650mm Internal Size: 1150×605×600mm
Cabinet Material	Double SPCC + 20mm PEF Insulation cotton

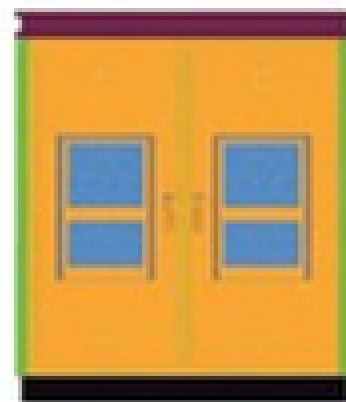

Model	ODC-136585-SVC-01
Cabinet Size (H×W×D)	External Size: 1300×650×850mm Internal Size: 1100×600×800mm
Cabinet Material	Double SPCC + 20mm PEF Insulation cotton

Application fields:

communications, industry, electric power, radio and television, energy storage, transportation and other industries

Product features:

Protection grade IP55, dustproof, waterproof, auto-start on incoming calls, intelligent temperature adjustment, support for cooling and heating functions, real-time upload of alarm data, data visualization, intelligent analysis, high reliability, can be used in extreme cold and hot areas, 5-10 years Maintenance-free use.

Moedel	SVC-300-SVC01	SVC-600-SVC01	SVC-1000-CVS01	SVC-1500-SCV01	SVC-2000-SCV01	SVC-3000-CVS01	SVC-5000-CVS01
Cooling Power	300W	600W	1000W	1500W	2000W	3000W	5000W
External Size (H*W*D)	550*320*170mm		750*450*200mm			1300*500*284mm	1354 824 310mm
Hole Size	A		B			C	D
Running Enviroment	-40 to +55°C						
Rated Input Power	330W	330W	380W	580W	880W	1240W	1700W
Rated Input Voltage	220±15%VAC-50Hz						
Rated Input Current	1.2A	1.5A	2.4A	2.6A	4.0A	5.6A	7.7A
Heating Power	500W Optional)	500W/1000W(Optional)					
Protetion Level	IP55						
Cryogen	R134a						
Mount	Side Hold(Cabinet Door or Side Board)						



Application fields:

communications, industry, electric power, radio and television, energy storage, transportation and other industries

Product features:

Protection grade IP55, dustproof, waterproof, auto-start on incoming calls, intelligent temperature adjustment, support for cooling and heating functions, real-time upload of alarm data, data visualization, intelligent analysis, high reliability, can be used in extreme cold and hot areas, 5-10 years Maintenance-free use.

Moedel	SV-300-SVC1	SV-600-SVC1	SV-1000SVC01	VC-1500-SVC01	VC-2000-SVC01	VC-5000-SVC1
Cooling Power	300W	600W	1000W	1500W	2000W	3000W
External Size (H*W*D)	380 219133mm	550*320*170mm	750*450*200mm			1300*500*284mm
Hole Size	A	B	C			D
Running Enviroment						
Rated Input Power	120W	197W	320W	430W	570W	1140W
Rated Input Voltage	DC48V					
Rated Input Current	2.5A	4.1A	6.6A	9.0A	11.8A	23.7A
Heating Power	300W		500W			
Protetion Level	IP55					
Cryogen	R134a					
Mount	side hold (cabinet door or side board)					



TEMPERATURE CONTROL EQUIPMENT DOUBLE HOUSING CABINET

Application fields:

communications, industry, electric power, radio and television, energy storage, transportation and other industries

Product features:

Protection grade IP55, dustproof, waterproof, auto-start on incoming calls, intelligent temperature adjustment, support for cooling and heating functions, real-time upload of alarm data, data visualization, intelligent analysis, high reliability, can be used in extreme cold and hot areas, 5-10 years Maintenance-free use.

Moedel	SVC5000-AN01	SVC1000-MD	SVC-1500-MD	SVC-2000-MD	SVC-3000-MD	SVC-4000-MD
Cooling Power	600W	1000W	1500W	2000W	3000W	4000W
External Size (H*W*D)	552*320*186mm	727*371*187mm	1108 406*197mm		1275 487*248mm	
Hole Size	A	B	C		D	
Running Enviroment	-40 to +55℃					
Rated Input Power	320W	380W	610W	1000W	1320W	1670W
Rated Input Voltage	220±15%VAC-50Hz					
Rated Input Current	1.3A	1.7	2.8A	4.6A	6.0A	7.6A
Heating Power	500W(option)		1000W(option)			
Protetion Level	IP55					
Cryogen	R134a					
Mount	side hold (cabinet door or side board)					



BATTERY EQUIPMENT

LI-IRON BATTERY

Model	4850	48100	48150	48200
System Capacity (wh)	2560	5120	7680	10240
Battery Type	Li-Iron Battery			
Portative Lecel	Ip40			
Weight (kg)	25	49	73	150
Rate Capacity (Ah)	97	50	100	200
Rate Voltage (V)	51.2V			
Work Voltage (V)	46V-57V			
Communication	Rs485			
Cooling Model	Nature Cooling			
Size (W*D*H)	3U	5U	5U	7U
Woaterproof Level	1p40			
Work Temp	Charging: 0°C-60°C			
	Discharge: -20°C-60°C			



48V150Ah



48V100Ah



48V150Ah



48V200Ah

USER SHOW




USER SHOW






RACK SYSTEM

WALL MOUNT DOUBLE SECTION CABINETS

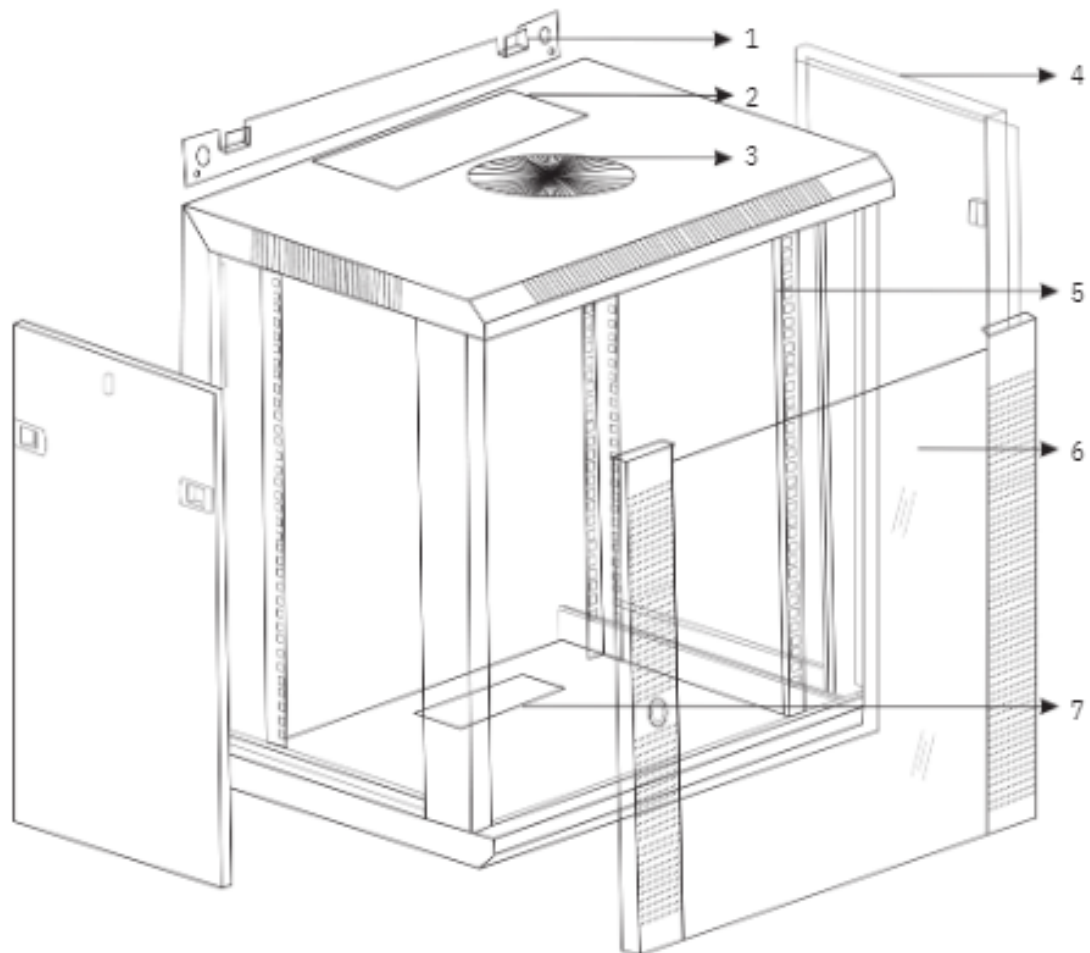


- 1.Wall mount Panel
- 2.Top Cable Entry
- 3.Soundless Top Fan
- 4.Removable Side Panels
- 5.Mounting Profile
- 6.Front Glass Door with Lock
- 7.Bottom Cable Entry

WALL MOUNT DOUBLE SECTION CABINETS

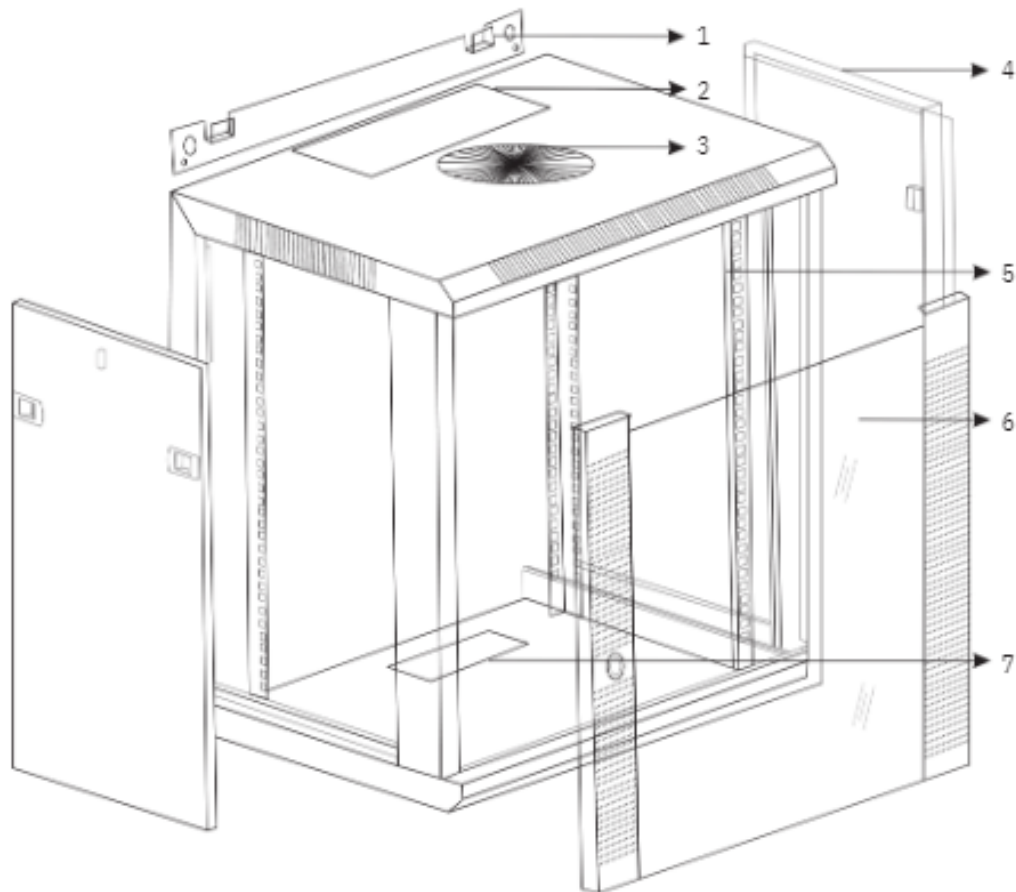

1. Wall mount Panel
2. Top Cable Entry
3. Soundless Top Fan
4. Removable Side Panels
5. Mounting Profile
6. Front Glass Door with Lock
7. Bottom Cable Entry

WALL MOUNT DOUBLE SECTION CABINETS

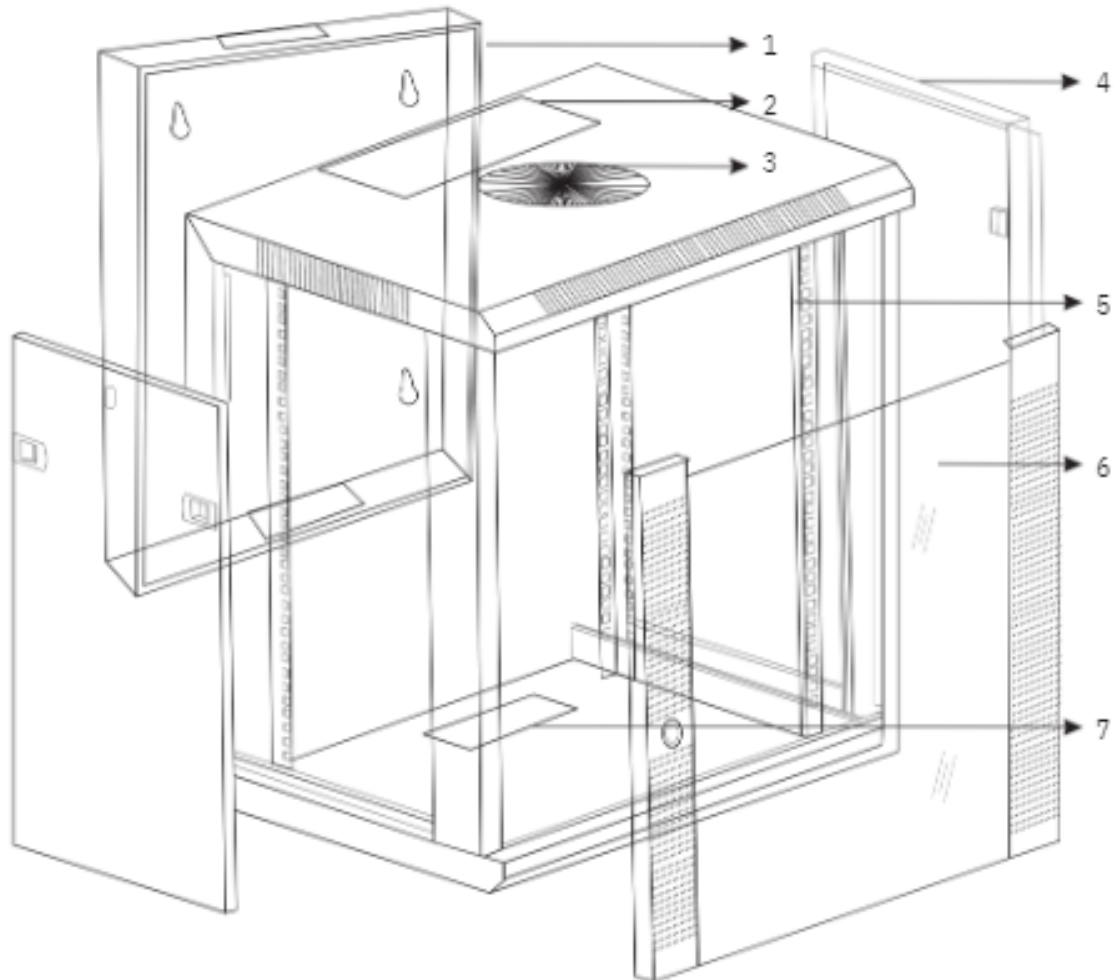

- 1.Rear Section with cable entry
- 2.Top Cable Entry
- 3.Soundless Top Fan
- 4.Removable Side Panels
- 5.Mounting Profile
- 6.Front Glass Door with Lock
- 7.Bottom Cable Entry

WALL MOUNT DOUBLE SECTION CABINETS



I Description

wall mount cabinets designed with heavy duty frame and customer friendly facility for data communication and telecommunication network solutions. Size ranges from 4U till 18U, these cabinets available in various dimensions to suit the requirements of customers

I Applications and Standards

- Housing CCTV, Servers, UPS systems, Network and MATV equipment
- Comply with ANSI/EIA-RS-310-D, IEC 297-2, DIN 41491
- Available in 4U, 6U, 9U, 12U, 15U and 18U

I Physical Characters

Protection Rating	:	IP 20 /– IP 55
Material	:	SPCC quality cold rolled steel / Aluminum Body
Surface Finish	:	Power coating.
Color	:	Black (RAL 9005) or Grey (RAL 7035)
Width	:	600mm
Depth	:	550, 600 and 800mm
Height	:	Varies as per the number of Us
Frame Type	:	Welded rigid frame
Construction	:	1.5 to 2.0 mm gauge steel thickness
Profile	:	19” adjustable heavy duty profile in the front and rear.
Profile Standard	:	2.0 mm gauge heavy duty Universal/EIA type.
Loading Rate	:	From 30 Kg to 50 Kg
Front Door	:	180 degree opening type tempered Glass door
Side Panels	:	Clutch opening type side panels with round lock system
Rear Mount	:	Rear section hinged to the front section
Cable Access	:	Top and Bottom cable entry

WALL MOUNT DOUBLE SECTION CABINETS

I Accessories

Cooling Fan	: 1 unit of 2 fans roof or door mount type, Thermostat controlled.
Shelves	: Fixed shelf, Sliding shelf and cantilever shelves(optional).
Cage nuts	: Heavy duty cage nuts of 25 pcs set.
System Light	: Door operated system light (optional)

IP protection for IP 55 Cabinets

Doors and side panels	: Additional IP rated gasket on doors and side panels.
Cable Entries	: Protected with IP rated gaskets and brush panels.
Air ventilation	: Side panels with Louvers to provide air ventilation And the louvers are protected with stainless steel mesh.

I Ordering Information

Dimension	Color
4U DS 600X550X250	BL ACK/GREY
4U DS 600X800X250	BL ACK/GREY
6U DS 600X550X320	BL ACK/GREY
6U DS 600X800X320	BL ACK/GREY
9U DS 600X550X500	BL ACK/GREY
9U DS 600X800X500	BL ACK/GREY
12U DS 600X550X650	BL ACK/GREY
12U DS 600X800X650	BL ACK/GREY
15U DS 600X550X750	BL ACK/GREY
15U DS 600X800X750	BL ACK/GREY
18U DS 600X550X900	BL ACK/GREY
18U DS 600X600X900	BL ACK/GREY
18U DS 600X800X900	BL ACK/GREY

B - Black

G - Grey

WALL MOUNT DOUBLE SECTION CABINETS



I Description

Floor Standing cabinets designed with heavy duty frame and customer friendly facility for data communication and telecommunication network solutions. Size ranges from 22U till 47U, these cabinets available in various dimensions to suit the requirements of customers.

I Applications and Standards

- Housing CCTV, Servers, UPS systems, Network and MATV equipment
- Comply with ANSI/EIA-RS-310-D, IEC 297-2, DIN 41491
- Available in 22U, 27U, 32U, 37U, 42U and 47U

I Physical Characters

Type	: Free Standing
Protection Rating	: IP 20 IP 55
Material	: SPCC quality cold rolled steel / Aluminum Body
Surface Finish	: Powder coating.
Color	: Black (RAL 9005) or Gre
Width	: 600, 800 & 1000 mm
Depth	: 600, 800,1000 and 1200 mm
Height	: Varies as per the number of Us
Frame Type	: Welded rigid frame
Construction	: 1.5 to 2.0 mm gauge steel thickness
Profile	: 19" adjustable heavy duty profile in the front and rear.
Profile Standard	: 2.0 mm gauge heavy duty Universal/EIA type.
Loading Rate	: From 300 Kg to 1500 Kg
Front Door	: 180 degree opening type tempered Glass door/ metal
	: Perforated single or double door with swing cam lock
Side Panels	: Clutch opening type side panels with round lock system

AFLOORSTANDING CABINETS

Rear Door	: 180 degree opening type steel plane door/ metal Perforated single or double door with round lock
Cable Access	: Top and Bottom cable entry
Accessories	
Cooling Fan	: 1 unit of 2 fans or 4 fans roof or door mount type, Thermostat controlled.
Cable Management Shelves	: Vertical cable management system for 800mm wide racks : Fixed shelf, Sliding shelf and cantilever shelves (optional).
Castors	: Heavy duty castors with stopper system (optional).
Leveling Feet	: 4 pcs leveling feet in addition to castors (optional).
Plinth	: 100 mm heavy duty plinth with cable access provision (optional)..
Cage nuts	: Heavy duty cage nuts of 25 pcs set.
System Light	: Door operated system light (optional).
IP protection	
Doors and side panels	: Additional IP rated gasket on doors and side panels.
Cable Entries	: Protected with IP rated gaskets and brush panels.
Air ventilation	: Side panels with Louvers to provide air ventilation And the louvers are protected with stainless steel mesh.

Ordering Information

Size	Dimension
22 U -F	600x600x1200
22 U -F	600x800x1200
22 U -F	800X800X1200
27 U -F	600x800x1400
27 U -F	600X1000X1400
27 U -F	800X800X1400
32 U -F	600x800x1600
32 U -F	600x1000x1600
37 U -F	600x800x1800
37 U -F	600X1000X1800
42U- F	600X600X2000
42U- F	600X800X2000
42U- F	600x1000x2000
42U- F	800X800X2000
42U- F	800X1000X2000
47 U -F	600x800x2200
47 U -F	800X800X2200
47 U -F	600x1000x2200
47 U -F	800X1000X2200

A FLOOR STANDING CABINETS

I Wall Mount Single Section Cabinets



I Description

wall mount cabinets designed to accommodate multiple 19" equipment modules for data communication and telecommunication network solutions. Size ranges from 4U till 18U, these cabinets available in various dimensions to suit the requirements of customers.

I Applications and Standards

- Housing CCTV, Servers, UPS systems, Network and MATV equipment
- Comply with ANSI/EIA-RS-310-D, IEC 297-2, DIN 41491
- Available in 4U, 6U, 9U, 12U, 15U and 18U

I Physical Characters

Type	: Single section, wall mount
Protection Rating	: IP 20
Material	: SPCC quality cold rolled steel
Surface Finish	: Degrease acid pickling, rust prevention and Parkerizing, Pure water cleaning, static electricity painting over Powder coating durable.
Color	: Black (RAL 9005) or Grey (RAL 7035)
Width	: 600mm
Depth	: 450, 550 and 600 mm
Height	: Varies as per the number of Us
Frame Type	: Welded rigid frame
Construction	: 1.2 to 1.5 mm gauge steel thickness
Profile	: 19" adjustable profile in the front and rear.
Profile Standard	: 2.0 mm gauge heavy duty Universal/EIA type.
Loading Rate	: Up to 30 Kgs
Front Door	: 180 degree opening type tempered Glass door/ metal door With round lock

A FLOOR STANDING NETWORK CABINETS

Side Panels	: Clutch opening type side panels with optional lock system
Cooling Fan	: 1 unit roof mount type, heavy duty, noiseless.
Cable Access	: Top and Bottom cable entry
Mounting Accessories	: Heavy duty cage nuts Universal/ TIA/EIA standard

I Ordering Information

Dimension	Accessories
4U SS 600X450X250	BLACK/ GREY
4U SS 600X550X250	BLACK/ GREY
6U SS 600X450X320	BLACK/ GREY
6U SS 600X550X320	BLACK/ GREY
6U SS 600X600X320	BLACK/ GREY
9U SS 600X450X500	BLACK/ GREY
9U SS 600X550X500	BLACK/ GREY
9U SS 600X600X500	BLACK/ GREY
12U SS 600X450X650	BLACK/ GREY
12U SS 600X550X650	BLACK/ GREY
12U SS 600X600X650	BLACK/ GREY
15U SS 600X450X750	BLACK/ GREY
15U SS 600X550X750	BLACK/ GREY
15U SS 600X600X750	BLACK/ GREY
18U SS 600X450X900	BLACK/ GREY
18U SS 600X550X900	BLACK/ GREY
18U SS 600X600X900	BLACK/ GREY

WALL MOUNT SINGLE SECTION CABINETS



- Description Double section cabinets are designed for easy access of the rear side of a wall mount cabinet.

The rear section of the cabinet mount to the wall and the front section hinged to the rear section with locks.

- Applications and Standards

- Housing CCTV, Servers, UPS systems, Network and MATV equipment
- Comply with ANSI/EIA-RS-310-D, IEC 297-2, DIN 41491
- Available in 4U, 6U, 9U, 12U, 15U and 18U

- Physical Characters

Type	: Double section, wall mount
Protection Rating	: IP 20
Material	: SPCC quality cold rolled steel
Surface Finish	: Degrease acid pickling, rest prevention and Parkerizing, Pure water cleaning, static electricity painting over Powder coating durable.
Color	: Black (RAL 9005) or Grey (RAL 7035)
Width	: 600 mm
Depth	: 560 and 600 mm
Height	: Varies as per the number of Us
Frame Type	: Welded rigid frame
Construction	: 1.2 to 2.0 mm gauge steel thi
Profile	: 19" adjustable profile in the frontand rear
Profile Standard	: 2.0 mm gauge heavy duty Universal/EIA type.
Loading Rate	: Up to 30 kgs
Front Door	: 180 degree opening type tempered Glass door/ Metal door with round lock

WALL MOUNT DOUBLE SECTION NETWORK CABINETS

Side Panels	:	Clutch opening type side panels with optional lock system.
Mounting Type	:	Rear section mount to the wall and front section hinged to the rear section with safety lock.
Cooling Fan	:	1 unit roof mount type, heavy duty, noiseless.
Cable Access	:	Top and Bottom cable entry.
Mounting Accessories	:	Heavy duty cage nuts Universal/ TIA/EIA standard.

I Ordering Information

Dimension	Color
4U DS 600X560X250	Black/Grey
6U DS 600X560X320	Black/Grey
9U DS 600X560X500	Black/Grey
12U DS 600X560X650	Black/Grey
15U DS 600X560X750	Black/Grey
18U DS 600X560X900	Black/Grey
18U DS 600X600X900	Black/Grey

FTTH CABINETS



Flush Mount



Wall Mount



Wall/Flush Mount

I Description

SVC cabinets for customer premises are designed in different models and sizes to suit customer requirements. These cabinets are available in single-section or double-section types with glass door, metal door, wall mount, flush mount, and extended frame types.

I Applications and Standards

- Comply with ANSI/EIA-RS-310-D, IEC 297-2, DIN 41491
- Available in 6U, 12U, 15U and 18U

I Physical Characters

Type	: Single section, wall mount
Protection Rating	: IP 20
Material	: SPCC quality cold rolled steel
Surface Finish	: Degrease acid pickling, rust prevention and Parkerizing, Pure water cleaning, static electricity painting over Powder coating durable.
Color	: Black (RAL 9005) or Grey (RAL 7035) or as per request
Width	: 600 and 400 mm (with 10" profile)
Depth	: 120, 150 and 300 mm.
Height	: Varies as per the number of Us.
Frame Type	: Welded rigid frame.
Construction	: 1.0 to 1.5 mm gauge steel thickness.
Profile	: 19" or 10" adjustable profile in the front.
Profile Standard	: 1.5 mm gauge heavy duty Universal/EIA type.
Loading Rate	: Up to 20 Kgs.
Front Door	: 180 degree opening type tempered Glass door/ metal door With round lock.

FTTH CABINETS

Side Panels : Closed type

Cable Access : Top, Bottom or side cable entry as per design

Mounting Accessories : Heavy duty cage nuts Universal/ TIA/EIA standard




Flush Mount 400x400x120

I Ordering Information

Dimension (mm)	Color	Type
400X400X120	GREY	Flush mount with frame
400X600X120	GREY	Flush mount with frame
600X600X150	GREY	Wall/flush mount
600X600X150	BLACK	Wall/flush mount
600X600X150	GREY	Flush mount
600x600x150	GREY	Flush mount with frame
600x600x300	GREY	Wall mount
600x700x150	GREY	Wall/flush mount
600x900x150	GREY	Wall/flush mount
		Metal Door

FLOOR STANDING CABINET

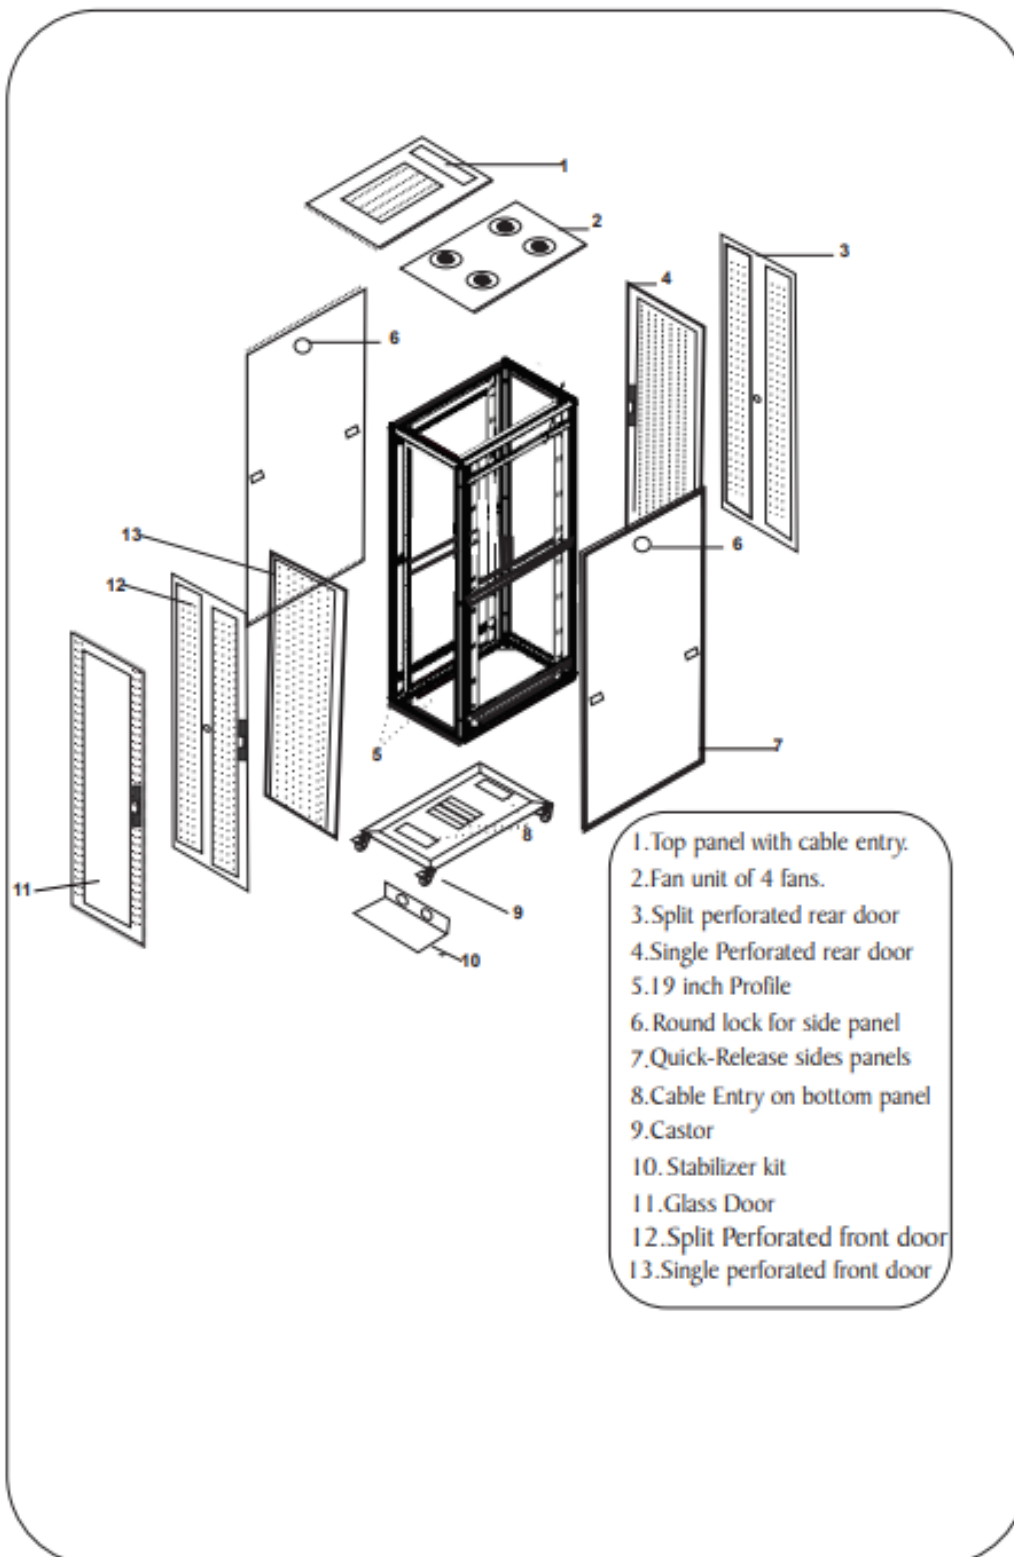

FLOOR STANDING CABINET



Description

floor standing cabinets designed to accommodate multiple 19" equipment modules for data communication and telecommunication network solutions. Size ranges from 22U till 47U, these cabinets available in various dimensions to suit the requirements of customers.

Applications and Standards

- Housing CCTV, Servers, UPS systems, Network and MATV equipment
- Comply with ANSI/EIA-RS-310-D, IEC 297-2, DIN 41491
- Available in 22U, 27U, 32U, 37U, 42U and 47U

Physical Characters

Type	
Protection Rating	: Free Standing
Material	: IP 20
Surface Finish	: SPCC quality cold rolled steel
Color	: Powder coating.
Width	: Black (RAL 9005) or Grey (RAL 7035)
Depth	: 600mm & 800mm
Height	: 600, 800, 1000 and 1200 mm
Frame Type	: Varies as per the number of Us
Construction	: Welded rigid frame
Profile	: 1.2 to 2.0 mm gauge steel thickness
Profile Standard	: 19" adjustable heavy duty profile in the front and rear.
Loading Rate	: 2.0 mm gauge heavy duty Universal/EIA type.
Front Door	: From 300 Kg to 900 Kg
Side Panels	: 180 degree opening type tempered Glass door/ metal
Rear Door	: Perforated single or double door with swing cam lock
Cable Access	: Clutch opening type side panels with round lock system : 180 degree opening type steel plane door/ metal : Perforated single or double door with round lock : Top and Bottom cable entry

FLOOR STANDING CABINET

I Accessories

Cooling Fan	: 1 unit of 2 fans or 4 fans roof mount type, noiseless.
Cable Management	: Vertical cable management system for 800mm wide racks
Shelves	: Fixed shelf, Sliding shelf and cantilever shelves / optional.
Castors	: Heavy duty castors with stopper system
Leveling Feet	: 4 pcs leveling feet in addition to castors
Plinth	: 100mm heavy duty plinth with cable access prvision / optional.
Cage nuts	: Heavy duty cage nuts of 25 pcs set.

I Ordering Information

Size	Dimension mm(wxdxh)
22 U -F	600x600x1200
22 U -F	600x800x1200
22 U -F	600X1000X1200
22 U -F	800X800X1200
22 U -F	600x1000x1200
27 U -F	600X600X1400
27 U -F	600X800X1400
27 U -F	600x1000x1400
27 U -F	800x800x1400
27 U -F	800x1000x1400
32 U -F	600x800x1600
32 U -F	800x800x1600
37 U -F	600X600X1800
37 U -F	600x800x1800
37 U -F	600X1000X1800
37 U -F	800X800X1800
37U- F	800x1000x1800
42 U- F	600X600X2000
42 U- F	600x800x2000
42 U- F	800X1000X2000
42 U- F	800X800X2000
42 U- F	800x1000x2000
47 U -F	600X600X2200
47 U -F	600x800x2200
47 U -F	600X1000X2200
47 U -F	600X800X2200
47 U -F	800x1000x2200

OUTDOOR CABINETS



I Description

Outdoor cabinets made with heavy duty cold rolled steel or stainless steel or aluminum frame for our door applications. These cabinets are either with single frame or with dual frame and are custom built as per customer requirements .

I Applications and Standards

- Housing CCTV, Servers, UPS systems, Network and MATV equipment
- Comply with ANSI/EIA-RS-310-D, IEC 297-2, DIN 41491
- Available in wall mount and floor standing types

I Physical Characters

Series	: Outdoor
Type	: out door wall mount or free standing
Protection Rating	: IP 55
Material	: SPCC quality cold rolled steel / Aluminum or Stainless steel body.
Surface Finish	: Powder coating.
Color	: Black (RAL 9005) or Grey (RAL 7035) or custom color
Width	: 600mm & 800mm
Depth	: 300,450,600,800 and 1000 mm
Height	: Varies as per the number of Us
Frame Type	: Welded rigid frame
Construction	: 1.5 to 2.0 mm gauge steel thickness.
Profile	: 19" adjustable heavy duty profile in the front and rear.
Profile Standard	: 2.0 mm gauge heavy duty Universal/EIA type.
Loading Rate	: From 200kg to 400kg
Front Door	: 180 degree opening type tempered Glass door/meta Door with IP rated gaskets and swing cam lock
Side Panels	: Removable type side panels with air ventilation : Louvers which are protected with stainless steel mesh
Rear Door	: 180 degree opening type steel plane door with IP Rated Gaskets and locks
Cable Access	: Bottom cable entry protected with gaskets.

OUTDOOR CABINETS

Accessories :- Optional

Cooling Fan	: 1 unit of 2 fans or 4 fans roof or door mount type, Thermostat controlled
Cable Management	: Vertical cable management system for 800mm wide racks
Shelves	: Fixed shelf, Sliding shelf and cantilever shelves.
Castors	: Heavy duty castors with stopper system
Leveling Feet	: 4 pcs leveling feet in addition to castors
Plinth	: 100mm heavy duty plinth with cable access provision.
Cage nuts	: Heavy duty cage nuts of 25 pcs set.
System Light	: Door operated system light

I Ordering Information

Description	Dimension mm (WxDxH)
4U Single Section Cabinet	600X300X250
4U Single Section Cabinet	600X450X250
4U Single Section Cabinet	600X600X250
6U Single Section Cabinet	600X300X320
6U Single Section Cabinet	600X450X320
6U Single Section Cabinet	600X600X320
9U Single Section Cabinet	600X300X500
9U Single Section Cabinet	600X450X500
9U Single Section Cabinet	600X600X500
12U Single Section Cabinet	600X300X650
12U Single Section Cabinet	600X450X650
12U Single Section Cabinet	600X600X650
15U Single Section Cabinet	600X300X750
15U Single Section Cabinet	600X450X750
15U Single Section Cabinet	600X600X750
18U Single Section Cabinet	600X300X900
18U Single Section Cabinet	600X450X900
18U Single Section Cabinet	600X600X900

OUTDOOR CABINETS

I Ordering Information

Description	Dimension mm (WxDxH)
22 U -F	600x600x1200
22 U -F	600x800x1200
22 U -F	800X800X1200
27 U -F	600x800x1400
27 U -F	600x800x1400
27 U -F	600X1000X1400
32 U -F	800X800X1400
32 U -F	600x800x1600
37 U -F	600x800x1600
37 U -F	600X1000X1800
42U- F	600X600X2000
42U- F	600X800X2000
42U- F	600x1000x2000
42U- F	800X800X2000
42U- F	800X1000X2000
47 U -F	600x800x2200
47 U -F	800X800X2200
47 U -F	600x1000x2200
47 U -F	800X1000X2200

OPEN RACKS



I Description

floor standing open racks designed to accommodate multiple 19" equipment modules for data communication and telecommunication network solutions. Size ranges from 27U till 47U, these racks available in single and dual post models to suit the requirements of customers.

I Applications and Standards

- Housing CCTV, Servers, UPS systems, Network and MATV equipment
- Comply with ANSI/EIA-RS-310-D, IEC 297-2, DIN 41491
- Available in 27U, 42U, 45U and 47U

I Physical Characters

Type	: Free Standing
Material	: SPCC quality cold rolled steel
Surface Finish	: Powder coating.
Color	: Black (RAL 9005) or Grey (RAL 7035)
Height	: Varies as per the number of Us
Frame Type	: Welded rigid frame single or dual
Construction	: 1.2 to 2.0 mm gauge steel thickness
Profile	: 19" profile in the front and rear of each frame.
Profile Standard	: 2.0 mm gauge heavy duty Universal/EIA type.
Loading Rate	: Up to 150 Kg
Cable Management	: Vertical cable management on both sides(optional)
Leveling Feet	: 4 pcs leveling feet


OPEN RACKS

Ordering Information

Size	Type
27 U	Single Frame
27 U	Double Frame
42 U	Single Frame
42 U	Double Frame
45 U	Single Frame
45 U	Double Frame
47 U	Single Frame
47 U	Double Frame

10" WALL MOUNT SINGLE SECTION CABINETS

19" Wall Bracket

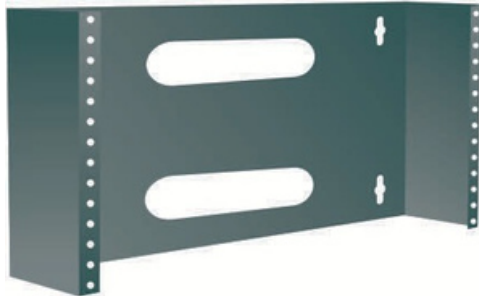

I Description

A 19" wall bracket is an ideal alternative to full size racks for accommodating 19" patch panels. Size ranges from 2U, 4U, 6U, 9U and 12U these brackets designed to open from one end to enable easy termination and maintenance

I Applications and Standards

- Housing 19" patch panels and cable organizers.
- Comply with ANSI/EIA-RS-310-D, IEC 297-2, DIN 41491
- Available in 2U, 4U, 6U, 9U and 12U

I Physical Characters

Type	: Wall Mount
Material	: SPCC quality cold rolled steel
Surface Finish	: Powder coating.
Color	: Black (RAL 9005) or Grey (RAL 7035)
Width	: 480mm
Depth	: 125 or 150 mm
Height	: Varies as per the number of Us
Frame Type	: Bend frame
Construction	: 1.0 to 1.5 mm gauge steel thickness
Profile	: 19" profile
Profile Standard	: 1.0 to 1.5 mm gauge Universal/EIA type.
Loading Rate	: Up to 15 Kgs

I Ordering Information

Size	Color
2U 480X150X90	Black
4U 480X150X180	Black
6U 180X150X270	Black
9U 180X150X400	Black
12U 480X150X535	Black

10" WALL MOUNT SINGLE SECTION CABINETS

10" Wall Mount Single Section Cabinets



Description

wall mount single section 10" cabinets (SOHO) designed to accommodate multiple 10" equipment modules for data communication and telecommunication network solutions. Size ranges from 4U, 6U, 9U, 12U and 15U, these cabinets available with glass door and metal door designs

Applications and Standards

- Housing CCTV, Network and MATV equipment
- Comply with ANSI/EIA-RS-310-D, IEC 297-2, DIN 4149 I
- Available in 4U, 6U, 9U, 12U and 15U

Physical Characters

Type	:Single section, wall mount
Protection Rating	:IP 20
Material	:SPCC quality cold rolled steel
Surface Finish	:Powder coating.
Color	: Black (RAL 9005) or Grey (RAL 7035)
Width	:300mm
Depth	: 250 mm
Height	: Varies as per the number of Us
Frame Type	: Welded rigid frame
Construction	:1.0 to 1.5 mm gauge steel thickness
Profile	:10" adjustable profile in the front
Profile Standard	:1.5 mm gauge heavy duty Universal/EIA type.
Loading Rate	: Up to 20 Kgs
Front Door	:80 degree opening type tempered Glass door/ metal door With round lock
Side Panels	:Clutch opening type side panels with optional lock system (optional)
Cooling Fan	:1 unit roof mount type, heavy duty, noiseless (optional)
Cable Access	:Top and Bottom cable entry
Mounting Accessories	:Heavy duty cage nuts Universal/ TIA/EIA standard


10" WALL MOUNT SINGLE SECTION CABINETS

I Ordering Information

Dimension	Color
4U SS 300X250X250	Black / Grey
6U SS 300X250X320	Black / Grey
9U SS 300X250X500	Black / Grey
12U SS 300X250X650	Black / Grey
15U SS 300X250X750	Black / Grey

ACCESSORIES

I Cable Organizer

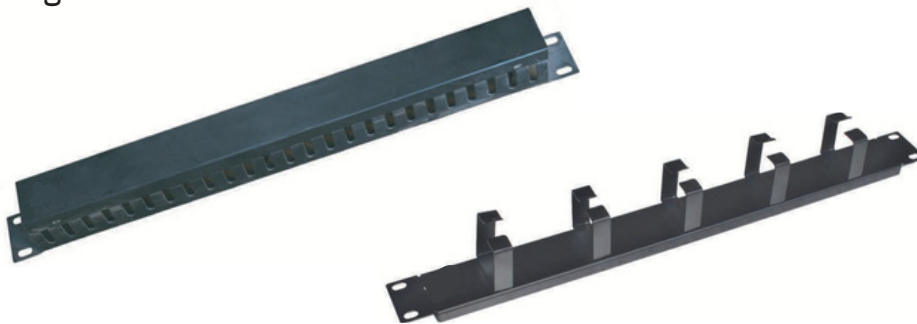

I Description

SVC, for proper cable management at racks, designed cable organizers in both horizontal and vertical types to provide neat and easy cable organizing solutions. The horizontal cable organizers are available in hook types, cover types, and brush panels.

I Applications and Standards

- Cable management in wall mount and floor standing cabinets
- 19" horizontal rack mount types available in 1U and 2U standards.
- Vertical types for 22U, 27U, 32U, 37U, 42U, 47U cabinets and for open racks.

I Physical Characters

Series	:E-Series
Type	: 19" rack mount or vertical mount.
Material	:SPCC quality cold rolled steel
Surface Finish	:Powder coating.
Color	: Black (RAL 9005) or Grey (RAL 7035)
Width	: 19" or 480mm for 19"rack mount type 90 mm for vertical type
Depth	: 35 or 65 mm for 19"rack mount type 80 mm for vertical type
Height	:1U or 2U Vertical type varies as per the number of Us
Cable support	: D-Ring (hook), top cover or brush support
Construction	:1.0 to 1.5 mm gauge steel thickness
Loading Rate	:Up to 10 Kgs

ACCESSORIES

Size	Type
1U 480X40X45	1U Rack mountable with short hooks
1U 480X80X45	1U Rack mountable with long hooks
2U 480X80X90	2U Rack mountable with long hooks
1U 480X70X45	1U Rack mountable with Cover
1U 480X45	2U Rack mountable with Brush Panel

I Ordering Information vertical type

Size	Type
42U Vertical organizer	Black
42U Vertical organizer	Black
37U Vertical organizer	Black
32U Vertical organizer	Black
27U Vertical organizer	Black
22U Vertical organizer	Black

ACCESSORIES

■ Fan Unit



2 Fan Set



4 Fan Set

Standard with most of SVC wall mount and floor standing cabinets, the fan unit is available as a single fan, set of 2 fans, and set of 4 fans. The single fan unit is used in wall mount cabinets, whereas 2 and 4 fan sets are used in floor-standing type cabinets. A fan unit with a thermostat controller is also available to maintain the temperature level in the cabinet.

■ Features

Fan unit	: Single, set of 2 and 4.
Type	: Roof, Door mountable or 1U rack mountable
Voltage	: 220/240V – 50/60Hz
Speed	: 1380 rpm
Noise Level	: 50 DbA
Power Cord Type	: 1.5 mtr UK type power cord
Dimension of single fan	: 120(L)x120(W)x38(D) mm
2 fan set with fan tray	: 500(L)x200(W)x45(D) mm
4 fan set with fan tray	: 510(L)x410(W)x45(D) mm (for 800mm Racks) 710(L)x410(W)x45(D) mm (for 1000 mm Racks)
4 fans set with thermostat, 19"	: 480(L)x320(W)x45(D) mm
Fan Tray	: For 2 and 4 fan set
Material	: SPCC quality cold rolled steel
Fan Tray Color	: Black or Grey

■ Ordering Information

Dimension	Color
1 fan unit	Black
Set of 2 fans	Black
Set of 4 fans (800 mm)	Black
Set of 4 fans (1000 mm)	Black
Set of 4 fans with thermostat controller, 19"	Black
Thermostat controller for fan	Black

ACCESSORIES

■ Fixed Shelf



four post heavy duty fixed shelf with a loading capacity of 50-100 kgs, available in different size to suit the required cabinets.

■ Features

Type	: Standard / Heavy Duty
Mounting	: Four post mounting
Material	: SPCC quality cold rolled steel
Surface Finish	: Powder coating.
Color	: Black (RAL 9005) or Grey (RAL 7035)
Depth	: Varies as per the depth of cabinets
Construction	: 1.2 to 2.0 mm gauge steel
Loading Range	: 50 Kgs for normal / 100 kgs for Heavy Duty

Dimension	Color
FIXED STATIONARY SHELVES 600	BLACK / GREY
FIXED STATIONARY SHELVES 800	BLACK / GREY
FIXED STATIONARY SHELVES 1000	BLACK / GREY

ACCESSORIES

I Sliding Shelf



Sliding shelf enables to pull out equipment placed inside the cabinet. These shelves are available in different sizes as per the depth the cabinets.

I Features


Type	: Standard
Mounting	: Four post mounting
Material	: SPCC quality cold rolled steel
Surface Finish	: Powder coating.
Color	: Black (RAL 9005) or Grey (RAL 7035)
Depth	: Varies as per the depth of cabinets
Construction	: 1.2 to 2.0 mm gauge steel
Loading Range	: 20 Kgs

I Ordering Information

Dimension	Color
SLIDING SHELVES 600	BLACK / GREY
SLIDING SHELVES 800	BLACK / GREY
SLIDING SHELVES 1000	BLACK / GREY

ACCESSORIES

■ Cantilever shelf

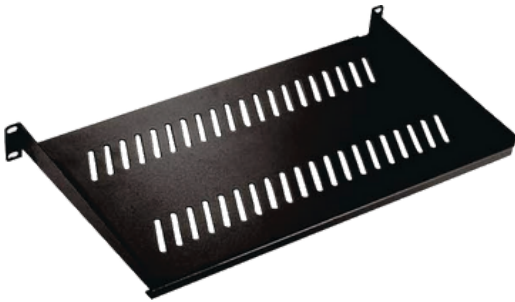

1U 19" rack mounted type cantilever shelf fix to the profile of rack to place equipment inside the racks. The available sizes are 250 and 350mm depth.

■ Features

Type	: Standard
Mounting	: 1U rack mounting
Material	: SPCC quality cold rolled steel
Surface Finish	: Powder coating.
Color	:Black (RAL 9005) or Grey (RAL 7035)
Depth	: 250 and 350 mm
Construction	: 1.5 mm gauge steel
Loading Range	: 20 Kgs

Dimension	Color
SLIDING SHELVES 600	BLACK / GREY
SLIDING SHELVES 800	BLACK / GREY
SLIDING SHELVES 1000	BLACK / GREY

ACCESSORIES

Blank Panel



19" rack mount blank panels help to cover the free/ blank spaces of the rack profile. Blank panel normally available in 1U, 2U and 4U sizes.

Features

Type	: Standard
Mounting	: 19" rack mount
Material	: SPCC quality cold rolled steel
Surface Finish	: Powder coating.
Color	: Black (RAL 9005) or Grey (RAL 7035)
Size	: 1U, 2U and 3U
Construction	: 1.0 mm gauge steel

Dimension	Color
1U BLANK PANEL	BLACK / GREY
2U BLANK PANEL	BLACK / GREY
4U BLANK PANEL	BLACK / GREY

ACCESSORIES

I PDU



Rack mount Power Distribution Units (PDUs) are designed in different types like normal power strips, PDUs with master switch, PDUs with circuit breaker, and surge protection devices. Normal power strips are available in 4-way and 6-way power outlets, while PDUs offer outlet ranges of 6, 10, and 12 ways. All these PDUs are available in UK, Universal, and Schuko input styles, and can be mounted horizontally or vertically.

I Features

Mounting	: 19" rack mount/ vertical mount
Shell Material	: PVC/ Aluminum Body
Color	: Black or Silver
Output	: 4, 6, 10 and 12 way
Standard	: UK, UN or SCHUKO
Control	: Master Switch / Surge Protection

I Dimension

6 way	: 480(L) x 45(D) x 45(H)
10 way	: 520(L) x 45(D) x 60(H)
12 way	: 780(L) x 45(D) x 45(H)

I Input Characteristics

Rated input voltage	: 220-250 VAC 50/60 Hz
Maximum Current	: 13-16A
Power Cable Length	: 1.8 Meter 3G 1.5 mm ²
Connecting Socket	: 13A fused socket (32A industrial Socket Optional)

I Output Characteristics

Rated input voltage	: 220-250 VAC 50/60 Hz
Maximum Current	: 13-16A
Output Sockets	: 4, 6, 10 and 12

I Ordering Information

Dimension	Color
6 WAY NORMAL POWER STRIP	BLACK/SILVER
6 WAY NORMAL POWER STRIP	BLACK/SILVER
6 WAY PDU HORIZONTAL UK TYPE	BLACK/SILVER
10 WAY PDU VERTICAL UK TYPE	BLACK/SILVER
12 WAY PDU VERTICAL UK TYPE	BLACK/SILVER

ACCESSORIES

I Earth kit



I Ordering Information

Dimension	Type
EARTHING KIT	6 PCS SET

I Baying Kit



I Ordering Information

Dimension	Type
BAYING KIT	FOR FLOOR STANDING CABINET

I Cage Nuts



I Ordering Information

Dimension
25 PCS SET OF CAGE UNITS
25 PCS SET OF CAGE UNITS

ACCESSORIES

I Leveling Feet



I Ordering Information :-

Description
4 PCS SET OF LEVELING FEET

I Stabilizer Kit



I Ordering Information

Description
STABILIZER KIT FOR SERVER RACK

ACCESSORIES

I Castors



I Ordering Information

Description
4 PCS HEAVY DUTY CASTOR
4 PCS LIGHT DUTY CASTOR

I Plinth



Dimension	Description
800x800x100	100 mm PLINTH FOR 800x800
600x800x100	100 mm PLINTH FOR 600x800
800x1000x100	100 mm PLINTH FOR 800x1000
600x1000x100	100 mm PLINTH FOR 600x1000



THANK YOU

TO OUR EMPLOYEES, YOUR HARD WORK AND DEDICATION ARE GREATLY APPRECIATED. TO OUR PARTNERS, THANK YOU FOR YOUR COLLABORATION AND TRUST. AND TO OUR READERS, WE HOPE THIS DOCUMENT PROVIDES VALUABLE INSIGHTS INTO OUR EFFORTS TOWARDS A SUSTAINABLE FUTURE. TOGETHER, WE ARE MAKING A SIGNIFICANT IMPACT IN THE REALM OF RENEWABLE ENERGY.

VERSION 2024 ENGLISH
SVC COMPANY CO.,LTD
SVC (RIYADH)CO.,LTD
EMAIL: A.HIASAT@SVISIONS.NET
O.ALHUSSEIN@SVISIONS.NET



SAUDI ARABIA- RIYADH -EXIT 18



WWW.SVC.COM.SA

