

Classification Report

| | |
|------------------|--|
| Number | 21-003724-PR01 (NW-A01-02-en-01) |
| Owner | ELVIAL S.A. Aluminium Extrusion 25th Km national road Thessaloniki 61100 Kilkis Greece |
| Product | Tilt and turn casement door |
| Designation | System: ELVIAL Iconic W77BS.AI ² Shipping name: ELVIAL Iconic W77BS.AI ² |
| Details | Manufacturer ELVIAL S.A., Aluminium Extrusion - Kilkis; Material Aluminium system with thermal break; Type of opening Tilt and turn; Opening direction DIN left, inward opening; Overall dimensions (W x H) 900 mm x 2300 mm |
| Special features | Test sequence. Position of locking. Material compatibility must be taken into account. Material durability must be taken into account. |

Result **)

Air permeability according to EN 12207:2016-12



Class: 4

Resistance to wind load according to EN 12210:2016-03



Class: C5/B5


Watertightness according to EN 12208:1999-11



Class: E1050

ift Rosenheim

30.09.2021

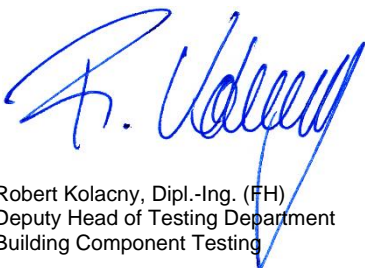

Robert Kolacny, Dipl.-Ing. (FH)
Deputy Head of Testing Department
Building Component Testing



Dimitrios Moustakidis, MSc, Dipl.-Ing.
Operating Testing Officer
Building Component Testing

Basis *)

EN 14351-1:2006+A2:2016-09
*) and corresponding national versions
(e.g. DIN EN)

Test report: 21-003724-PR01 PB-
A01-02-en-01

Representation



Instructions for use

The Evidence ("Nachweis") can be used for preparing the Declaration of Performance in accordance with the Construction Products Regulation 305/2011/EU. The results obtained apply to the direct field of application determined in Annex E of EN 14351-1.

**) Decision rule: For the conformity assessment, the determined measurement results were assumed to be error-free values.

Validity

There is no time limit.
When using this document the up-to-dateness of above basis and the conformity of the product have to be observed.

Notes on publication

The ift-Guidance Sheet "Conditions and Guidance for the Use of ift Test Documents" applies.

Identity-Check



www.ift-rosenheim.de/ift-geprueft
ID: B12-593C1