

[illegible]

| SPIRAL CONDUITS & FITTINGS | CABLE GLANDS & ACCESSORIES | PANEL FANS
| PVC WIRING DUCTS | DIN MOUNTING RAILS | CABLE TIES | LUGS | DRAG CHAIN
| HEAVY DUTY CONNECTORS | PILOT LIGHT & PUSH BUTTONS | INDUSTRIAL SWITCHES
| EXPANDABLE SLEEVE

SPIRAL CONDUITS & FITTINGS SYSTEMS**Features**

- Metallic & Non-metallic
- Galvanised steel
- GI with PVC coating
- Liquid tight
- Polyamide PA6 V2
- Flammability Class : EN45545-2HL2 HL3
- PE & Slit version also available
- Halogen free
- UV resistant
- Self extinguishing
- Temperature range: -40 to +120°C

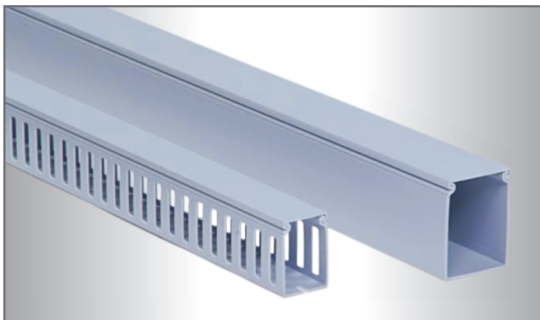
CE RoHS

NYLON CABLE GLANDS & ACCESSORIES**Features**

- Metric & PG cable glands
- Nickel plated brass
- Temperature range : -40°C to +100°C
- Flammability Class : EN45545-2HL2 HL3
- PA6 Nylon cable glands
- IP 68 - 5 bar
- VDE, TUV, UL certified

ORTAC®

UL CE RoHS

PVC WIRING DUCTS, TOOLS & ACCESSORIES**Features**

- Available in Narrow Slot & Wide Slot
- Un-slotted design also available on request
- Standard length 1 meter & 2 meter
- Available in grey color (RAL 7042)
- Other colors also available on request

CE RoHS

Industrial Plugs & Socket**Features**

- Panel Mounted Angular
- Wall Mounted, Mobile Socket
- Material Nylon PA6, Copper pins
- IP44 / IP67
- Rated Current- 16A/32A/63A/128A
- No of Poles (2P, 3P, 4P, 5P)

CE RoHS

PANEL FANS COOLING SOLUTIONS**Features**

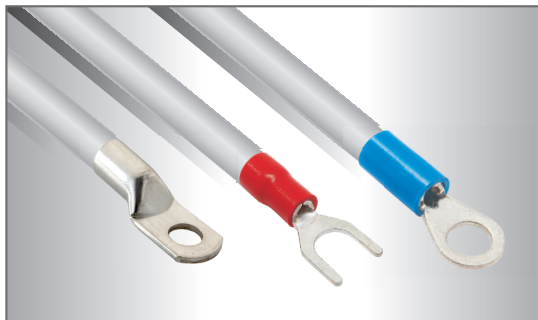
- Aluminium die cast body
- Metal & Plastic blades
- Sleeve bearing
- Ball bearing
- Also available in plastic body
- Flame retardant
- Voltage - 220V AC, 110V AC, 24V DC

CE RoHS

Heat Shrink Tube**Features**

- Material- EVA
- Temperature Range -40°C~50°C
- Initial shrinking temp-70°C
- Full shrinking temp -125°C
- Mechanical Strength $\geq 1.5\text{kv/mm}$
- Safety Standard - FT2 ROHS
- Shrinking Ratio - 2:1
- Rated voltage - 600v

TÜV CE RoHS

CABLE LUGS & CORD END TERMINALS**Features**

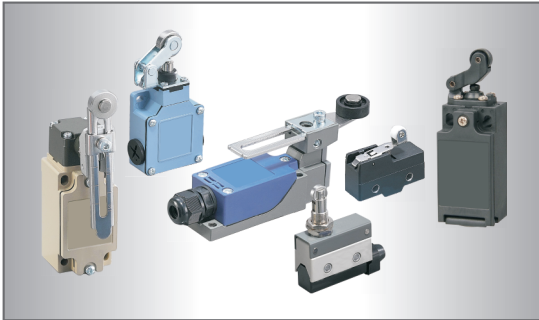
- Cord end terminals E type, Twin type, Fork type, Ring type, PIN type, male & female terminals
- Insulated & Non-insulated
- Material - Copper & Nylon

CE RoHS

NYLON CABLE TIES**Features**

- Material - PA6.6
- Fire retardant
- Self locking
- Temperature range: -35°C - +110°C
- CE, RoHS, UV resistance
- Colors available - White & Black
- Other colors are also available on request

CE RoHS

INDUSTRIAL SWITCHES**Features**

- Double circuit type of limit switch
- Small size, water-proof & oil-proof construction
- High mechanical strength, consist of intensive plastic & aluminium cast
- Built in contact box has double spring & long mechanical life
- Smooth operation with larger over travel distance
- Various actuators for different application

**HEAVY DUTY CONNECTORS****Features**

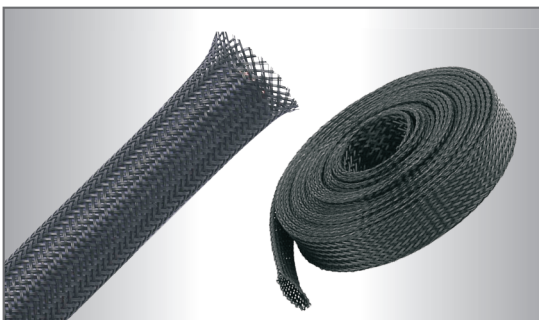
- Metal & thermoplastic enclosures
- Various specifications for power, signal and data
- Modular design
- High current solution

**PILOT LIGHTS & PUSH BUTTONS SERIES****Features**

- Push Buttons & Indicating Lights**
- Metallic & Non-metallic Mushroom type, Flush type, Momentary selector switches, Push pull type, Illuminated type
 - Temperature range: -25°C to +70°C
 - Self wiping, slow break NO NC
 - IP 65



- Pilot Lights**
- SMD LED
 - ABS Body

**EXPANDABLE SLEEVE****Features**

- Light weight but tough polyester monofilament.
- Economical answer to installing, protecting, strengthening, enhancing and assembling over bundles, wires, cables and flexible piping.
- The push back effect of PET enables it to cover a wide range of sizes
- Allows for easy application.

