

290 CORPORATE DRIVE LUMBERTON, NC 28358 WWW.TITANFCI.COM TITAN@TITANFCI.COM 910.735.0000 TEL 910.738.3848 FAX

# **PRODUCT GUIDE**

# TITAN FLOW CONTROL, INC. YOUR PIPELINE TO THE FUTURE!

Titan Flow Control is a high quality manufacturer of Check Valves, Butterfly Valves, Pipeline Strainers, Pump Products, Fabricated Designs, and Pipeline accessories applicable to most industrial and commercial requirements. Titan Flow Control was established in the year 2000 by industry veterans with over 300 years of combined experience. We are located in the southeastern part of North Carolina and currently occupy over 70,000 ft<sup>2</sup> of office, warehouse, and manufacturing space.

- "Y" STRAINERS
- BASKET STRAINERS
- DUPLEX STRAINERS
- STRAINING ELEMENTS
- FRP STRAINERS
- TEMPORARY STRAINERS
- FABRICATED STRAINERS
- "T" STRAINERS
- IN-LINE CHECK VALVES
- SILENT CHECK VALVES
- WAFER TYPE CHECK VALVES
- GLOBE TYPE CHECK VALVES
- SINGLE DISC CHECK VALVES
- DUAL DISC CHECK VALVES
- BALL VALVES
- BUTTERFLY VALVES
- SUCTION DIFFUSERS
- TRI-FLOW VALVES
- FOOT VALVES
- AUTOMATIC STRAINERS
- AND MUCH MORE ...
- **TELEPHONE:** 910.735.0000

PG-0920 / Page 1

# TITAN FLOW CONTROL, INC. "Y" Type Strainers

### Cast Iron



**YS 12-CI** Class 250 Threaded Sizes:  ${}^{1}/_{4} \sim 3$ "



Class 125 Flanged Sizes: 2 ~ 24"



YS 59-CI Class 250 Flanged Sizes: 2 ~ 12"

### Need a strainer? ....It's a no-brainer!

#### We routinely stock:

- Sizes 1/4" through 24"
- Pressure Classes 125 ~ 2500
  - Standard materials
  - Exotic materials
    - All end connections

If we don't have it - we'll help you find it!


## Bronze & Brass



YS 55-BR YS 55-BZ Class 125 Threaded Sizes:  $1/4 \sim 3$ "



**YS 56-BR YS 56-BZ** Class 125 Solder Sizes:  $1/4 \sim 3$ "




**YS 52-AB** Class 250 Threaded Sizes: <sup>1</sup>/<sub>4</sub> ~ 3"



**YS 54-AB** Class 150 Flanged Sizes: 2 ~ 12"

# Carbon & Stainless Steel

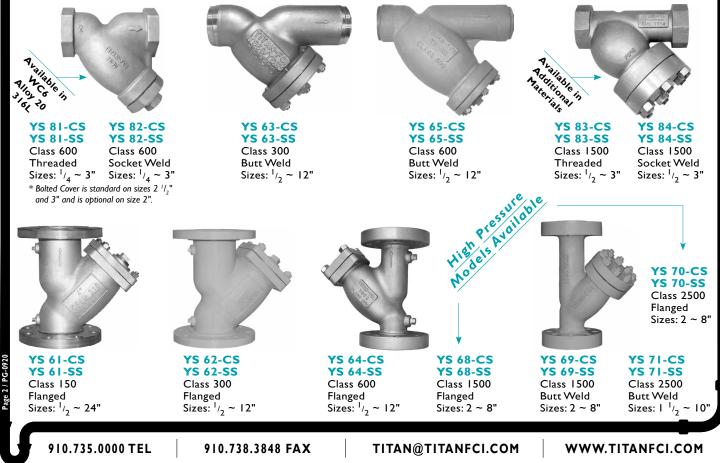

# TITAN FLOW CONTROL, INC. **Basket Strainers (Simplex)**

# Cast Iron



**BS 25-CI** Class 125 Threaded Quick-Open Cover Sizes: 3/8 ~ 3"



BS 25F-CI Class 125 Flanged Quick-Open Cover Sizes: 1 ~ 8"



**BS 55-CI** Class 125 Flanged Clamp Cover Sizes: 2 ~ 12"



Availabe

BS 65-CI Class 125 Flanged Bolted Cover Sizes: 2 ~ 12"

# **Carbon & Stainless Steel**



**BS 35-CS BS 35-SS** Class 150/300 Threaded Sizes:  ${}^{3}/_{8} \sim 3"$ 





**BS 85-SS** Class 150 Flanged Sizes: 2 ~ 12"



**BS 86-CS BS 86-SS** Class 300 Flanged Sizes: 2 ~ 12"

Hi! I'm NEW

# Fiberglass & Aluminum Bronze



# TITAN FLOW CONTROL, INC. **Duplex Strainers**

### Cast Iron



DS 595-CI Class 125 Threaded Cast Iron Sizes: 3/4 ~ 2 1/2"

DS 695-CI Class 125 Flanged Cast Iron Sizes: I ~ 4"

# Stainless & Carbon Steel Aluminum Bronze



DS 596-CS/SS DS 796-CS/SS DS 696-CS/SS DS 896-CS/SS Class 150 Class 300 Threaded, Flanged Carbon Steel, Stainless Steel Sizes: 3/4 ~ 8"



**DS 596-AB** Class 150 Threaded Aluminum Bronze Sizes:  $3/4 \sim 2^{-1}/_{2}$ "

**DS 696-AB** Class 150 Flanged Aluminum Bronze Sizes: I ~ 4"

## Pump Products



**Tri-Flow Valve TF 21-CI** Class 125 Flanged Cast Iron Sizes: 2 ~ 20"



Foot Valve **FV 50-DI** Class 150 Flanged Ductile Iron Sizes: 2 ~ 12"



**Ball Valves** 

**BV 25-SS** Male x Female 3000 WOG Full Port Sizes:  $1/4 \sim 1 1/2$ " Reduced Port Size: 2"



**BV 60-BZ** 600 WOG Male x Female Full Port Design Sizes:  $1/4 \sim 2$ "

**Blow-off Valves** Ball Valves can be professionally installed as Blow-off Valves

at our factory before shipping.

### **Foot Valves**

Check Valve Models CV 80-SS and CV 20-BZ can also be designed as Foot Valves



**Suction Diffuser SD 22-CI** Class 125 Flanged Cast Iron Sizes:  $2 \times 1^{-1} / _{4} \sim 18 \times 18^{"}$ 

910.738.3848 FAX

TITAN@TITANFCI.COM

# TITAN FLOW CONTROL, INC. Check Valves

with

soft and metal

Available

### **Center** Guided



**CV 90-DI** Class 150/300 Wafer Type - Silent Ductile Iron Sizes: 2 ~ 12"



**CV 91-SS** Class 150/300 Wafer Type - Silent Stainless Steel Sizes: 2 ~ 12"



**CV 80-SS** Class 300 Threaded / In-Line Stainless Steel Sizes: <sup>3</sup>/<sub>8</sub> ~ 3"



**CV 88T-SS CV 88S-SS** Class 300 Threaded / Socket Weld Stainless Steel Sizes: 1/2 ~ 3"




CV 50-DI Class 150 Flanged - Globe Style Ductile Iron Sizes: 2 ~ 36"

# Available with soft and metal

CV 51-CS / CV 51-SS Class 150 Flanged - Globe Style Carbon & Stainless Steel Sizes: 2 ~ 36"



**CV 20-BR** 400 WOG Threaded / In-Line Brass Sizes: 1/4 ~ 2"



# Single & Dual Disc



CV 12-CS / CV 12-SS Class 150 Short Pattern - Wafer Type Carbon & Stainless Steel Sizes: 2 ~ 24"



CV 42-CS / CV 42-SS Class 150/300 Wafer - Dual Disc Carbon & Stainless Steel Sizes: 2 ~ 48"



**CV 31-DI** Class 150 Wafer - Swing Type Ductile Iron Sizes: 2 ~ 12"



CV 44-CS / CV 44-SS Class 300 Wafer - Dual Disc Carbon & Stainless Steel Sizes: 2 ~ 48"



CV 52-DI

Sizes: 2 ~ 36"

Class 300

CV 52-CS / CV 52-SS

Ductile Iron, Carbon & Stainless

Flanged - Globe Style


CV 32-CS / CV 32-SS Class 150 Wafer - Swing Type Carbon & Stainless Steel Sizes: 2 ~ 12"



CV 46-CS / CV 46-SS CV 47-CS / CV 47-SS Class 600 & 900 Wafer - Dual Disc Carbon & Stainless Steel Sizes: 2 ~ 48"



**CV 41-DI** Class 150 Wafer - Dual Disc Ductile Iron Sizes: 2 ~ 48"





**CV 71-SS** Class 150/300 Wafer - Insert Check Valve Stainless Steel Sizes: 1/2 ~ 6"

910.735.0000 TEL

910.738.3848 FAX

TITAN@TITANFCI.COM

# TITAN FLOW CONTROL, INC. Butterfly Valves & Actuation

# Cast & Ductile Iron



**BF 75-CI** 200 PSI Wafer Type Cast Iron Sizes: 2 ~ 48"

#### **Butterfly Valve Features:**

- Seat is Phenolic Backed Cartridge
- Sizes 2" through 12" in Stock
- Valve Bodies are Epoxy Painted
- Rated for 200 psi Bidirectional Service
- Extended Neck provides 2" of Piping Clearance
- Alignment Holes for easy Installation
- Designed in Accordance with ASME Class 125/150
- When ordered with Aluminum Bronze discs, Titan Butterfly Valves meet the requirements for Lead Free use in potable water systems. The lead content in the wetted surfaces of Titan Butterfly Valves with AB discs is 0.25% or less as determined by a weighted average. For more information on lead free requirements, contact Titan Flow Control, Inc.

#### artridge Dock Lead Free\* inted Butterfly Valve Discs ional Service Available

**BF 76-DI** 

Ductile Iron

Sizes: 2 ~ 48"

200 PSI

Lug Type

#### Mounting Options

Butterfly Valves are available with 10-position, actuator, gear box, and chain wheel mounting. Stem Extensions are also available.





**Chain Wheel** 

**Gear Box** 

#### **Universal Mounting Flange**

The cast-in actuator flange is universally designed in accordance with ISO 5211 standard dimensions. The mounting flange can accommodate all types of operators such as: 10-position handle kits, gear operators, electric actuators, and pneumatic actuators.

For actuators, Titan FCI may provide both direct mount and bracket mount designs. Please contact Titan FCI about your specific automation requirements.

### **Butterfly Valve Actuation**

Titan FCI offers a complete line of Pneumatic Actuators and Electric Actuators.



Pneumatic Actuator with Travel Indicator

#### Actuator Accessories:

- Three and Four-Way Direct Mount Solenoid Valves
- Pneumatic & Electro-Pneumatic Positioners
- Limit Switches
- Speed Controls
- Manual Override
- Lock Out Devices
- 4-20 MA and 3-15 PSI



Electric Actuator for Sizes 3" & Smaller



Electric Actuator for Sizes 4" & Larger





Electric Actuator Mounting Ac

Pneumatic Actuator Mounting

910.738.3848 FAX

TITAN@TITANFCI.COM



# TITAN FLOW CONTROL, INC. Fabricated Products

# Fabricated Products

### Titan FCI has the capability of designing and fabricating a variety of products to your exact specifications. Our fabricated products include:

- "Y" Strainers
- Basket Strainers

• Orifice Plates

- Temporary Strainers
- Spectacle Flanges

Steam Jacketed Strainers

• Duplex Strainers

- Fiberglass Reinforced Plastic Strainers
- And much more ....



Fabricated "Y" Strainer



**Fabricated Basket Strainer** 

• Plate Strainers

• Single Blinds

- "T" StrainersRing Spacers
- Please contact the factory directly for any special projects or applications you may require.



**Fabricated Duplex Strainer** 

Temporary Strainers Titan FCl can also manufacture

Temporary / Conical Strainers.

Temporary Strainer 'Pilgrim's Hat' Type

# **Replacement** Screens & Baskets

Titan FCI can manufacture straining elements for all types of strainers including:

- "Y" Strainers "T" Strainers Basket Strainers
- Duplex Strainers

Titan FCI can manufacture straining elements in a wide variety of perforations, meshes, and materials (Type 304, Type 316, Alloy 20, Monel).





Perforated Screen

Wire Mesh with Perforated Backing





We can also provide replacement screens and baskets for our competitor's strainers.

Just send us your prints, samples, or simply give us your requirements and let us design a straining element that is right for your application. In most cases, straining elements can be ordered by referencing Titan FCI's or <u>any other manufacturers'</u> strainer model number. Temporary Strainer 'Witch's Hat' Type

910.735.0000 TEL

910.738.3848 FAX

TITAN@TITANFCI.COM



Titan Flow Control, Inc. manufactures a complete line of very high quality pipeline strainers, double disc check valves, globe type silent check valves, and soft seated butterfly valves. Our product offerings include both a high quality import line as well as units crafted to meet full domestic requirements whenever needed.

Our management team has been designing and manufacturing industrial strainers for over 30 years. We have the ability to custom design units to conform to even the most complicated piping configurations imaginable. Our screen fabrication shop can quickly provide special screens in a wide selection of both perforated and wire mesh materials in sizes ranging from 20 through 500 mesh. We offer products fabricated from numerous alloys including bronze, ductile and cast iron, carbon steel, stainless steel, monel, alloy 20, nickel and hastelloy, as well as many others.

Every Titan unit is fabricated with premium components from certified vendors. The components that go into making a Titan FCI valve must conform to Titan's rigid standards. To test for meeting conformity, on arrival, every component is subjected to and must pass multiple, rigorous quality inspection procedures. Every casting carries a foundry heat number for immediate identification and for subsequent traceability. All parts are precision machined on the newest and most modern numerical control machinery - all manufactured in strict adherence to internationally recognized standards and specifications, including ASME/API/NACE and ISO. All products manufactured by Titan FCI are 100% hydrostatically tested in accordance with applicable ASME API, MSS standards and customer specifications.

Titan FCI is proud to have earned one of the highest quality/price ratios of any reputable strainer/valve company in the world.

You will find the most impressive fact about a Titan FCI product is the product itself. Titan will be more than pleased to provide you with a sample of any product you request.

Martin Gibbons President

Titan FCI's new manufacturing facility - right off of Interstate 95, Exit 17.

