

JACKCO[®]


HYDRAULIC TOOLS & EQUIPMENT



2020
PRODUCT CATALOG

About Us

Jackco Transnational Inc., established in 1994 in Los Angeles, California. We serve the automotive repair equipment industry focusing our efforts in hydraulic tools and equipment. We strive to bring you reliable, and quality tools that they can depend on everyday. Jackco works closely with domestic and overseas manufacturers to introduce new products into the market. We also provide international sourcing through our network of manufacturers to satisfy customer's specific needs/applications.

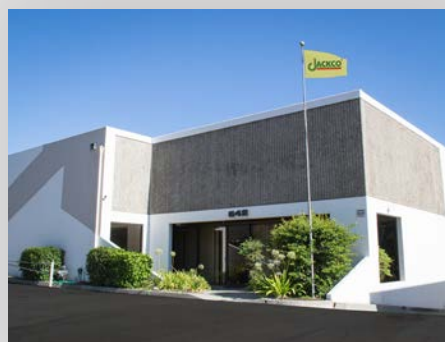

Hydraulic Tools

Body & Frame Repair Kit.....	2
Air Hydraulic Pump.....	3
Hydraulic Ram.....	4
Hose.....	5
Coupler.....	5
Air Hydraulic Jack.....	5
Hydraulic Long Ram.....	6
Bottle Jack.....	6
Pulling Post.....	7
Anchor Pot.....	7
Body Straightener.....	7
Shop Press.....	8
Shop Crane.....	8
Engine Stand.....	8
Pulling Clamps.....	9
Transmission Jack.....	11
Floor Jack.....	11
Jack Stand.....	12
Car Positioning Dolly.....	13
Engine Holder.....	13
Under Hoist Stand.....	13
Oil.....	14
Vacuum Grip.....	14
Pallet Jack.....	15
Fork Extension.....	19
Lift Table.....	20



Lighting / Hand Tools

Color Matching Light.....	21
Dead Blow Hammer.....	22
Industrial Drill Bit Set.....	22



Air Tools

Ratchet Wrench.....	23
Die Grinder.....	23
Angle Grinder.....	23
Heavy Duty Grinder.....	23
Reversible Drill.....	24
Long Barrel Air Hammer.....	24
Pistol Grip Polisher/Sander.....	25
Air Dryer Gun.....	26
Spray Gun Air Regulator.....	26
Spray Gun.....	26



Random Orbital Sanders

Random Orbital Sander.....	27
Vertech Backup Pads.....	29



Random Orbital Sanders

Random Orbital Sander.....	28
AirVANTAGE Backup Pads.....	29
Electric Sander.....	31



Jump Starter / Charger

Batteryless Jump Starter.....	32
-------------------------------	----

Model 804 - 4 Ton Set

Part No.	Description
804-1	Blow Mold Case
804-2	19 1/2" Extension Tube
804-3	16 1/2" Extension Tube
804-4	8 1/2" Extension Tube
804-5	5" Extension Tube
804-6	3 1/4" Extension Tube
804-7	Serrated Saddle
804-11	Spreader Ram
804-12	2 3/4" Rubber Head
804-13	Flat Base
804-14	Spreader Ram Toe
804-15	Spreader Plunger Toe
804-16	Wedge Base
804-17	90° V-Base
804-18	Connector
804-40	4 Ton Hydraulic Unit
804-41	4 Ton, 5" Stroke Ram
87006C	6 Ft. Hose With Half Coupling



Shipping Weight: 43 lbs.

Model 811 - 10 Ton Set

Part No.	Description
811-1	Blow Mold Case
811-2	24" Extension Tube
811-3	21" Extension Tube
811-4	10" Extension Tube
811-5	5" Extension Tube
811-7	Serrated Saddle
811-11	Spreader Ram
811-12	3 1/4" Rubber Head
811-13	Flat Base
811-14	Spreader Ram Toe
811-15	Spreader Plunger Toe
811-16	Wedge Head
811-17	90° V-Base
811-18	Connector
811-40	10 Ton Hydraulic Unit
811-41	10 Ton, 6" Stroke Ram
87006C	6 Ft. Hose With Half Coupling



Shipping Weight: 83 lbs.



Model 840

- Overload valve protects hydraulic system components regardless of air pressure.
- Automatic air valve is equipped for less air consumption.
- Improved muffler design further reduces exhaust noise.
- Included 6 ft. hydraulic hose.

Model	840
Rated Pressure	10,000 PSI (700 bar)
Air Pressure	90-120 PSI (6-8 bar)
Oil Flow @ 100 PSI Air Pressure	20 cu.in. / Min @ 0 PSI (335 c.c. / Min. @ 0 bar) 5.5 cu.in. / Min. @ 10,000 PSI (90 c.c. / Min @ 700 bar)
Usable Oil Capacity	27 cu.in. (450 c.c)
Air Consumption	6.6 CFM (11 m/hr)
Shipping Weight	12.1 lbs. (1 Set / Carton)



Model 842

- 97 cu.in. /1600 c.c reservoir
- Designed to work with large diameter or multiple hydraulic cylinders.
- Aluminum alloy reservoir for light weight and durability

Note: Hydraulic hose sold separately

Model	842
Rated Pressure	10,000 PSI (700 bar)
Air Pressure	90-120 PSI (6-8 bar)
Usable Oil Capacity	97 cu.in. (1600 c.c)
Dimensions (LxWxH)	10 in. (255mm) x 5.6 in. (144mm) x 8.3 in. (210mm)
Shipping Weight	18.37 lbs. (1 Set / Carton)

Model 14890 - Push & Pull Ram Set

- Carrying case for easy storage
- 5 piece push & pull rams
 - 5 Ton pull ram with attachments
 - 2 Ton pull ram with attachments
 - 10 Ton 2 1/4" push ram
 - 4 Ton 5/8" push ram

Shipping Weight: 38 lbs.



Single Acting Rams

- Great for replacement or additions to the body and frame repair kit
- Custom length or specification available



Model	Capacity Ton	Stroke	Collapsed Height	Extended Height	Spring Return	Plunger Diameter	Effective Ram Area Sq. In.	Operating Pressure PSI	Oil Capacity Cu. in.	Net Weight lbs.
80441	4	5"	10 1/16"	15 1/16"	YES	1"	0.994	8050	5.0	3.7
61041	10	6"	12"	18"	YES	1.5"	2.462	8950	14.77	9.15
81041	10	6"	14 3/4"	20 3/4"	YES	1.5"	2.462	8950	14.77	11.4
684	10	8"	14 5/8"	22 5/8"	YES	1.5"	2.462	8950	19.70	11.5
685	10	10"	16"	26"	YES	1.5"	2.462	8950	24.65	13
682	2	5"	9 3/16"	14 3/16"	YES	0.75"	0.552	7250	2.8	3.7
686	5	5 1/2"	12"	17 1/2"	YES	1.24"	1.257	8860	6.92	9.4
678	4	5/8"	1 5/8"	2 1/4"	NO	1"	0.994	8050	0.6	2
680	2	3"	4 7/8"	9 7/16"	NO	0.875"	0.785	5100	2.4	2.2
688	10	2 1/4"	4 5/8"	6 7/8"	YES	1.5"	2.23	8950	5.0	5.5

Couplers



Model	Description
86380B	3/8" NPT Coupler (Ram)
86381B	3/8" NPT Coupler (Hose)
86380	3/8" NPT Coupler (Ram)
86381	3/8" NPT Coupler (Hose)

Model	Description
86140	1/4" NPT Coupler (Ram)
86141	1/4" NPT Coupler (Hose)
86100	3/8" to 1/4" Adapter
86110	1/4" to 3/8" Adapter

Hose



Model	Description
87006C	6 Ft. Hydraulic Hose with 1/4" Coupler
87007C	6 Ft. Hydraulic Hose with 3/8" NPT fitting
87010C	10 Ft. Hydraulic Hose with 1/4" Coupler
87015C	15 Ft. Hydraulic Hose with 1/4" Coupler

Model 69120B Air/Manual Bottle Jack

- Quicker than using conventional hand operated bottle jacks.
- Added safety when operator is able to watch the load more closely.
- Suitable for automotive, industrial, and agricultural use.

Capacity Ton	Collapsed Height		Extended Height		Shipping Weight
	in.	mm.	in.	mm.	lbs.
20	9 5/8"	245	18 5/8"	475	37



Model 820B Air Hydraulic Jack

- Air-operated hydraulic service jack.
- Professional use in repairing trucks, trailers, buses and heavy duty vehicles.
- Air pressure range: 90-110 psi.
- One piece handle.

Note: Adapters included for additional height

Capacity Ton	Collapsed Height		Extended Height		Shipping Weight
	in.	mm.	in.	mm.	lbs.
20	8 7/8"	210	20 11/16"	525	105



Model 203/208 Hydraulic Long Ram

- Electrostatically painted to prevent corrosion.
- Heavy-duty steel saddle for secure lifts.
- Heat-treated, large diameter extension screw.
- Flat base and hook base available.



208FC
8 Ton



208HC
8 Ton



Available with hook base
(Models 203HC / 208HC)

Model	Capacity Ton	Collapsed Height	Extended Height	Lift	Weight lbs.
203FC / 203HC	3	24 1/2" / 27 1/2"	43" / 46"	20 1/2"	17.9 / 19.6
208FC / 208HC	8	24 1/4"	43 1/2"	20"	27 / 29.8



61112
12 Ton



61113
12 Ton



61121
20 Ton



61122
20 Ton



61130
30 Ton

Model	Capacity Ton	Collapsed Height		Extended Height		Lift		Screw		Weight lbs.
		IN.	MM.	IN.	MM.	IN.	MM.	IN.	MM.	
61112	12	9 1/4"	230	17 7/8"	450	5 7/8"	145	3	75	15.9
61113	12	7 1/2"	190	14"	356	3 1/2"	89	3	77	15.4
61121	20	7 1/2"	190	14"	356	3 1/2"	89	3	77	20.9
61122	20	9 1/2"	241	17 3/4"	452	5 1/8"	131	3 1/8"	80	24.2
61130	30	11"	279.4	17 7/16"	443	6 7/16"	163.5	-	-	30.8

*Low-profile 12 ton and 20 ton models are designed for low clearance vehicles and confined work places

Power Pulling Post

Model	890	892
Post Height	55.5"	68"
Pin Location Spacing	2.25"	3.35"
Number of Pin Holes	10	13
Ram Stroke	6"	8"
Base Dimensions	16" x 25"	16" x 33"
Metal Wheels	Yes	Yes
Net Weight	155 lbs	188 lbs



892

Model 890-AP Anchor Pots

- Attached cover
- 3 1/2" diameter, uses 3/8" chains
- Easy and quick install
- Tightens as you pull



Model 852B - Body Straightener (Swivel Type)

Model 859 - Body Straightener (w/ 1.2 Ton Crane & Swivel Post)

Note: Remove upper crane when using the swivel feature.



Model	852B	858B	853	859
Frame Assembly	1 pc	1 pc	1 pc	1 pc
Multi-Position Anchor Post	1 pc	1 pc	1 pc	1 pc
10 Ton 6" Stroke Ram	1 pc	2 pcs	1 pc	2 pcs
Manual Pump	1 pc	2 pcs	---	---
Air Hydraulic Pump	---	---	1 pc	2 pcs
Pull Ring	2 pcs	2 pcs	2 pcs	2 pcs
Pull Clamp	2 pcs	2 pcs	2 pcs	2 pcs
6 ft. Chain with Hook	2 pcs	2 pcs	2 pcs	2 pcs
Support Stand	2 pcs	2 pcs	2 pcs	2 pcs
Cross-Tube	1 pc	1 pc	1 pc	1 pc
Underbody Support Clamp	2 pcs	2 pcs	2 pcs	2 pcs
Crane	---	1 pc	---	1 pc
Approx. Shipping Weight	510 lbs.	608 lbs.	503 lbs.	596 lbs.

**Model 510S - Shop Press
Bench Top
Capacity: 10 Ton**



Model	510S
Height:	36"
Width between uprights:	16 3/4"
Max Ram to Table	16"
Shipping Weight:	130 lbs.

**Model 521 - Shop Press
Capacity: 20 Ton**



Model	521
Height:	61 1/2"
Width:	26 3/8"
Working Space	1/4" - 34"
Net Weight:	259.6 lbs.
Shipping Weight:	281.6 lbs.

**Model 520B - Shop Press
Capacity: 20 Ton**



Model	520B
Height:	61 1/4"
Width:	25 9/16"
Working Space	9-10" - 34"
Ram Stroke	8"
Net Weight:	261.8 lbs.
Shipping Weight:	294.3 lbs.

**Model 68999A
Shop Crane**

- 2 ton capacity.
- Fully assembled right out of the box.
- Compact design ideal for storage and transport.
- 8 Ton long ram jack.

Capacity	Stage 1	Stage 2	Stage 3	Stage 4	Shipping Weight
lbs.	1100	2200	3300	4400	247



**Model 71250
Engine Stand**

- Heavy-duty steel frame construction.
- 360 degrees rotating head;
Locks in 8 positions.
- Disassembles quickly and easily for storage and transport.

Model	71250
Capacity:	1250 lbs.
Shipping Weight:	70.4 lbs.



**NEW Model 71000R
Rotating Engine Stand**

- Effortlessly rotate the engine while it self locks in any position.
- Tool tray keeps tools and parts easily accessible while working on an engine.

Model	71000R
Capacity:	1000 lbs.
Gear Ratio:	60:1
Net Weight:	88 lbs.
Shipping Weight:	94.6 lbs.



Model 18302 Pull Link

- Rotates 135°
- Capacity: 3 Ton
- Shipping Weight: 9 lbs.



Model 18306 Clamp Width 100mm

- Capacity: 5 Ton
- Shipping Weight: 9 lbs.



Model 18308 Self-Tightening Right Clamp

- Capacity: 3 Ton
- Shipping Weight: 10 lbs.



Model 18320 Underbody Support Clamp

- Shipping Weight: 29.5 lbs.



Model 17113 Double Hook Set

- When needing to connect two chains or shortening a long chain.
- Grade 70
- 3/8" Clevis Grab Hooks
- Shipping Weight: 2.4 lbs.



Model 17119 Double Hook Set

- Length: 19"
- When needing to connect two chains or shortening a long chain.
- Grade 70
- 3/8" Clevis Grab Hooks
- Shipping Weight: 4 lbs.



Model Chain38-10 10' Chain with Hook

- Length 6 ft.
- Grade 70
- 3/8" Clevis Grab Hook
- Shipping Weight: 14 lbs.



Model Chain38-20 20' Chain with Hook

- Length 20 ft.
- Grade 70
- 3/8" Clevis Grab Hook
- Shipping Weight: 28 lbs.

Model 17102 Back Clamp

- Capacity:
2 Ton Cross - Direction
5 Ton Longitudinal - Direction
- Shipping Weight: 4.76 lbs.



Model 17105 Self-Tightening Right Clamp

- Capacity:
2 Ton Cross - Direction
3 Ton Longitudinal - Direction
- Shipping Weight: 5.06 lbs.



Model 17108 Pull Link Clamp

- Capacity: 1 Ton
- Long thin jaw design works wonders in tight confined space.
- Shipping Weight: 3.7 lbs.




Model 17125 Pull Clamp

- Capacity: 3 Ton
- Unique two clamp jaw sizes in one clamp design.
- Pull ring can be installed from both directions, depending on the work area.
- Shipping Weight: 4.5 lbs.



Model 17120 Quarter Puller

- Pulls rear quarter and wheel well.
- Hooks above the lip of the wheel opening.
- Two curvatures (one on each side) will fit almost all cars.
- Shipping Weight: 4.2 lbs.

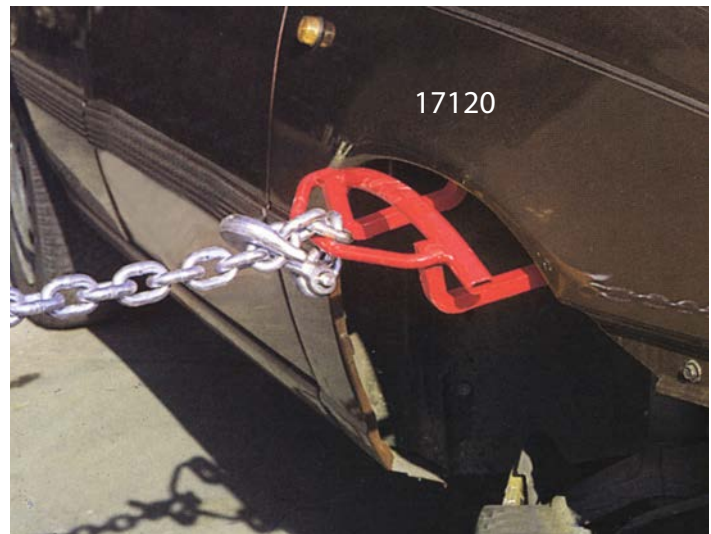

Model 17122 Mini Quarter Puller

- Fits small openings
- Perfect for taillight openings and radiator supports.
- Shipping Weight: 3.5 lbs.



Model 18540 Pull Hook Set

- Shipping Weight: 22.1 lbs.



Model 766B

Capacity: ½ Ton

- Professional transmission jack suitable for use under hoists on passenger cars & light trucks.
- Wide leg base with swivel wheels (brakes on two wheels)
- Fully adjustable universal saddle.
- Foot operated hydraulic pump for ease of control when positioning or removing transmission.
- Tilt forward 24° / backward 19° / left 20° / right 10°
- Meets ANSI/ASME PALD & CE/GS standards.

Model	766B
Capacity:	0.5 Ton
Min Height:	35.2"
Max Height:	71.7"
Shipping Weight:	165 lbs.



Model 770

Capacity: 1 ½ Ton

- Low profile transmission jack for heavy duty transmission repair.
- Pump handle rotates 360° for all position operation.
- Large metal casters for easy maneuvering.

Model	770
Capacity:	1.5 Ton
Min Height:	8.6"
Max Height:	37"
Net Weight:	293 lbs.
Shipping Weight:	336.7 lbs.
Dimensions:	45" (L) x 26.5" (W)




Model 65300

3 Ton Low Profile Aluminum Jack

- Aircraft billet aluminum construction.
- Dual plunger for quick lift.
- Side "D" handles for easy handling.
- Wide 2" front roller for stability.
- Foam grip insert included.

Model	65300
Capacity:	3 Ton
Strokes to Max Height	6
Min Height:	3.8"
Max Height:	18.1"
Saddle Diameter	4.5"
Shipping Weight:	59.4 lbs.
Dimensions:	26.4" (L) x 13" (W)

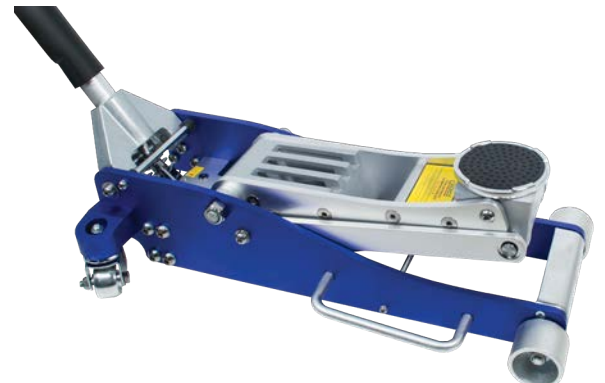

Model 66300C **NEW** Capacity: 3 Ton

- Large 3.5" by 2" wide front roller.
- Comfortable foam grip.
- Rubber saddle protects under car pinch welds.
- Formed steel frame for ultra rigidity.
- Fast lifting with dual plunger hydraulic power unit.



Dual Plunger
Hydraulic Power Unit

Model	66300C
Capacity:	3 Ton
# of Pumps* to Max Height:	4
Min Height:	4.3"
Max Height:	20.25"
Saddle Diameter:	4.7"
Net Weight:	97.2 lbs.
Shipping Weight:	101 lbs.
Dimensions:	29.75" (L) x 14.2" (W)

*One pump is defined as one full range of motion on the handle



Model 66500 Capacity: 5 Ton Long Chassis Floor Jack

- Heavy duty steel frame construction.
- Equipped with foot pedal for faster lifting.
- Release knob for controlled lowering.
- Durable cast iron wheels and casters.



Model	66500
Capacity:	5 Ton
Lift Range:	16.1"
Min Height:	5.9"
Max Height:	22"
Net Weight:	222.2 lbs.
Dimensions:	55" (L) x 14" (W)

Model 66510 Capacity: 10 Ton Long Chassis Floor Jack

- Heavy duty steel frame construction.
- Equipped with foot pedal for faster lifting.
- Release knob for controlled lowering.
- Durable cast iron wheels and casters.



Model	66510
Capacity:	10 Ton
Lift Range:	15.8"
Min Height:	6.2"
Max Height:	22"
Net Weight:	319 lbs.
Dimensions:	62" (L) x 17.5" (W)

Jack Stands

Model	40030	40060	40120
Capacity (Ton)	3	6	12
Min. Height IN. / MM.	12 1/2" / 310	16" / 406	19" / 482
Max Height IN. / MM.	17 5/8" / 446	24 3/4" / 629	30" / 762
Shipping Weight:	14.85 lbs.	28.6 lbs.	59.84 lbs.
Cu.Ft.	0.7	1.3	2.3



40030

40060

Model 40035 Capacity: 3 Ton Aluminum Jack Stands

- Aircraft-grade aluminum
- Lightweight - less than 5 lbs. each
- 6 adjusting positions from 9.5" to 15.25"
- Stable 7.1" diameter circular base
- 2" saddle
- Sold in pairs

Model	40035
Capacity:	3 Ton
Min. Height	9.5"
Max. Height	15.25"
Net Weight	9.9 lbs.
Shipping Weight	11 lbs.



Model CD310 NEW 1500 LB Car Positioning Dolly

- Heavy duty steel construction lifts individual wheel weight up to 1500 lbs.
- Ratcheting foot pedal for hands free and safe lifting and lowering of the tire.
- Side handle for easy carrying and transport
- Smooth rolling wheels
- Aluminum rollers
- For tires up to 12.8" wide

Model	CD310
Capacity	1500 lbs.
Maximum Tire Width	12.8"
Shipping Weight:	45 lbs.




Model 22050 Engine Holder - Swivel Type



Side View

- Engine Support Bar adjusts to the slope of the engine bay
- The base can be placed into the engine bay and the top bar be adjusted straight.

Model	22050
Capacity	1000 lbs.
Total Length of Bar	59.5"
Base Width	8.75"
Height:	8.5"
Shipping Weight	33.66 lbs.

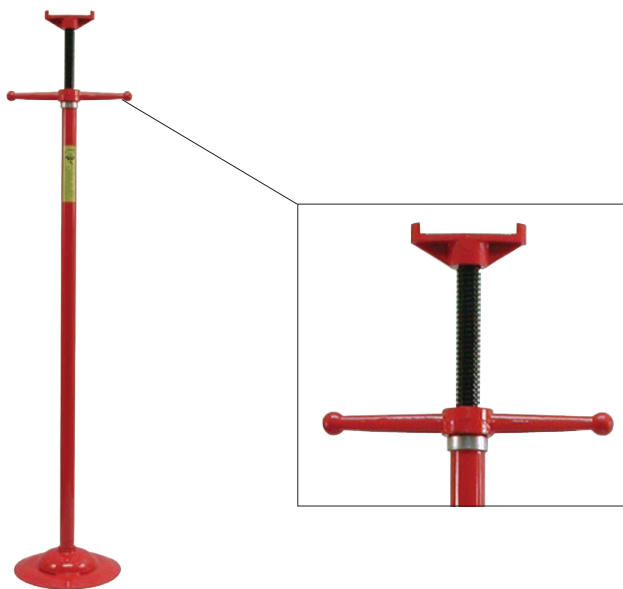

Model 43340 Underhoist Stand

- Features all steel construction and threaded base.
- Great for replacing exhaust systems and under hoist works.

Model	43340
Capacity (Ton)	$\frac{3}{4}$
Min. Height IN. / MM.	55" / 1395
Max Height IN. / MM.	78.5" / 1995
Shipping Weight:	30.8 lbs.

Model 01032 / 01128 Hydraulic Oil

- Pour point depression to -22° F.
- Protects against rust and corrosion.
- For use in bottle jacks, floor jacks, fork lifts and many other hydraulic applications.

Model	Volume	Case Q'ty
01032	32 fl.oz.	12
01128	1 Gallon	4



Model 05032 / 05128 Compressor Oil

- Good oxidation resistance to minimize sludge and varnish formation
- Excellent rust and corrosion protection
- Excellent water separating characteristics to minimize emulsions
- Good foam resistance
- Low carbon forming tendencies
- Power savings and lower maintenance costs

Model	Volume	Case Q'ty
05032	32 fl.oz.	12
05128	1 Gallon	4



Model 03004 / 03008 / 03016 Air Tool Oil

- Rapid water separation
- Protects against rust and corrosion
- Prevents foam, gums, sludge, etc.
- Increases RPMs and torque
- Suitable for air in-line lubricator
- Provides positive lubrication for piston-driven and rotary air tools

Model	Volume	Case Q'ty
03004	4 fl.oz.	12
03008	8 fl.oz.	12
03016	16 fl. oz.	12



Model VG100 Vacuum Grip

- Ideal for picking up glass and uses on car surfaces.
- Made from high impact plastic.
- Capacity: 77 lbs.



Model VG200 Vacuum Grip

- Ideal for picking up glass and uses on car surfaces.
- Made from high impact plastic.
- Capacity: 154 lbs.



Model VG500 Vacuum Grip

- Capacity: 55 lbs.



Note: Not intended for use on surfaces permeable by air, such as wood or cement.

5500 lb. Capacity Standard Hand Pallet Jack



- Powder coated hydraulic pump, robust and durable, with fine control of lowering speed and overload bypass valve.



- Polyurethane wheels: great for delicate floors with hard wearing and non-marking properties, quiet and durable.



- Three position operational handle lever for lifting, transporting and lowering purposes.



- Professional and ideal storage aid for all variety of manual transport tasks over short distances in stores and warehouses as well as factory plants.
- Compact and attractive design with maximum loading capacity of 5500 lbs.
- High quality steel and German standard WAGNER painting system ensures best powder coating and paint quality.
- All pivot points are greased, ensuring excellent maneuverability with effortless steering. The chromed bearing bushes and joints ensuring quiet running properties and long service life.



Hand Pallet Jack Specifications

Capacity	5500 lbs
Min. Fork Height	3 inch
Max Fork Height	7.5 inch
Steering Wheel	7 x 2 inch Polyurathane Coated
Load Roller Single	3 x 3.7 inch Polyurathane Coated

Model

Fork Size

PJ5500-2736	W27 x L36 inch
PJ5500-2742	W27 x L42 inch
PJ5500-2748	W27 x L48 inch
PJ5500-2132	W20.5 x L32 inch
PJ5500-2136	W20.5 x L36 inch
PJ5500-2142	W20.5 x L42 inch
PJ5500-2148	W20.5 x L48 inch
PJ5500-1836	W18 x L36 inch
PJ5500-1848	W18 x L48 inch

Wheels

Yellow Polyurethane



Red Polyurethane



Nylon



Steel



Wheel Type

Load Wheel

Fork Wheel

Yellow Polyurethane	PJ-LW-PUY	PJ-FW-PUY
Red Polyurethane	PJ-LW-PU	PJ-FW-PU
Nylon	PJ-LW-NYLON	PJ-FW-NYLON
Steel	PJ-LW-STEEL	PJ-FW-STEEL

Model PJ5500-2748-AC 5500 lb. Capacity Premium Hand Pallet Jack




Galvanized whole casting hydraulic pump, robust and durable, with fine control of lowering speed and overload valve, low routine maintenance.

- Top class range of pallet trucks.
- Professional and ideal storage aid for all variety of manual transport tasks over short distances in stores and warehouses as well as factory plants.
- Reliable, sturdy, torsion-resistant due to it's extremely strong high quality steel profile Germany standard WAGNER painting system ensures best powder coating and painting quality.
- All pivot points are greased, ensuring excellent maneuverability with effortless steering. The chromed bearing bushes and joints ensuring quiet running properties and long service life.

Hand Pallet Jack Specifications

Capacity	5500 lbs
Min. Fork Height	3 inch
Max Fork Height	7.5 inch
Steering Wheel	7 x 2 inch Polyurathane Coated
Load Roller Single	3 x 3.7 inch Polyurathane Coated

4400 lb. Extra Long Pallet Jack

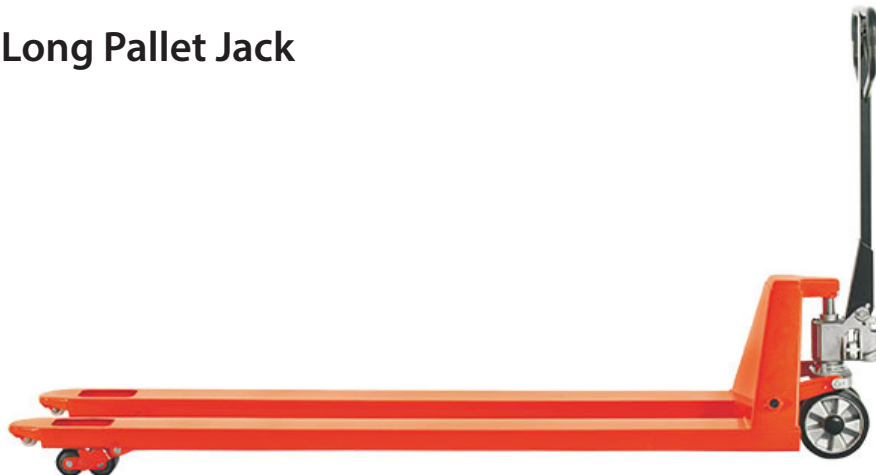

Extra Long Pallet Jack Specifications

Capacity	4400 lbs
Min. Fork Height	2.9 inch
Max Fork Height	7.5 inch
Steering Wheel	7.1 x 2 inch
Load Roller Single	2.9 x 3.7 inch
Load Roller Tandem	2.9 x 2.7 inch
Size of Forks	6.3 x 3 inch

- Diverse fork sizes
- Super long hand pallet truck designed for carrying goods with big volume
- 4400 lbs load capacity

Model Fork Size

PJ4400-2772	W27 x L72 inch
PJ4400-2779	W27 x L79 inch

Model PJ4400-2748-ACL 4400 lb. Low Profile Pallet Jack



Low Profile Pallet Jack Specifications

Capacity	4400 lbs
Min. Fork Height	2 inch
Max Fork Height	6.5 inch
Steering Wheel	7.1 x 2 inch
Load Roller Single	2 x 3.7 inch
Load Roller Tandem	2 x 3 inch
Size of Forks	6.3 x 1.5 inch
Overall Fork Width	27 inch
Length of Forks	48 inch

- Easy access to pallets and containers that sit lowest to the floor, with minimum floor clearance of 35mm and 51mm.
- Your handy choice for handling the low pallets which usually can only be handled by counterbalanced forklifts.

Model PJ6600-2748-ACM 6600 lb. Pallet Jack


Pallet Jack Specifications

Capacity	6600 lbs
Min. Fork Height	3.3 inch
Max Fork Height	8 inch
Steering Wheel	8 x 2 inch
Load Roller Single	3.1 x 3.7 inch
Load Roller Tandem	3.1 x 2.7 inch
Size of Forks	6.3 x 2.3 inch
Overall Fork Width	27 inch
Length of Forks	48 inch

- Professional and ideal storage aid for all variety of manual transport operations over short distances in stores and warehouses as well as factory plants.



- All pivot points are greased ensuring excellent maneuverability with effortless steering.
- The chromed bearing bushes and joints ensures quiet running properties and a particularly long service life.
- Ergonomically designed handle with comfortable rubber grip allows optimized safety as well as comfort.
- Three position operations handle for lifting, transporting and lowering purposes.

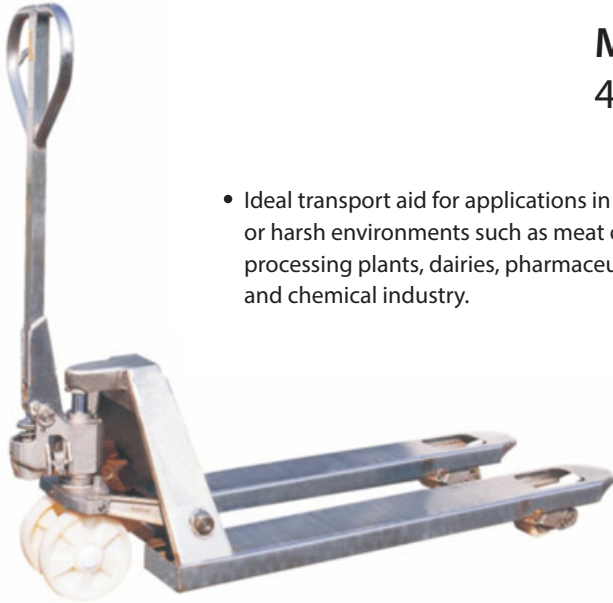

Model PJ4400-ACZ 4400 lb. Capacity Galvanized Hand Pallet Jack

- Ideal transport aid for applications in damp or harsh environments such as meat or fish processing plants, dairies, pharmaceutical and chemical industry.

Galvanized Pallet Jack Specifications

Capacity	4400 lbs
Min. Fork Height	3 inch
Max Fork Height	7.5 inch
Steering Wheel	8 x 2 inch
Load Roller Single	2.9 x 3.7 inch
Overall Fork Width	27 inch
Length of Forks	48 inch

Conforms to EN 1757-2

- All of the exposed parts of the whole truck are galvanized, including hydraulic pump, fork frame, handle and so on.
- Special application in cold and wet environments resists the effects of cold, condensation and washing.
- Nylon steering wheel and fork rollers as standard option for damp or harsh environments.
- Pressure relief valve and overload valve to prevent pump damages when load exceeds weight limits.
- The one-piece pump design simplifies repairs, assuring reliable service and long life.

Model PJ4400-ACS 4400 lb. Capacity Stainless Steel Hand Pallet Jack

Stainless Steel Pallet Jack Specifications

Capacity	4400 lbs
Min. Fork Height	3 inch
Max Fork Height	7.5 inch
Steering Wheel	8 x 2 inch
Load Roller Single	2.9 x 3.7 inch
Overall Fork Width	27 inch
Length of Forks	48 inch

Conforms to EN 1757-2

- All metal parts made completely of stainless steel, including hydraulic pump, fork frame, handle, and so on.
- Ideal transport aid for applications in damp or harsh environments such as meat or fish processing plants, dairies, pharmaceutical and chemical industries. Specifically designed for applications where hygiene is of utmost importance.

- With pressure relief valve and overload valve to prevent pump damages when load exceeds weight limits.
- The enclosed fork tips ensure there is no dead corner where corrosive spatters remains and damages the truck.




Model PJ4400-3348-4W Four-Way Pallet Jack



Four-Way Pallet Jack Specifications

Capacity	4400 lbs
Min. Fork Height	2 inch
Max Fork Height	6.5 inch
Steering Wheel	7 x 2 inch
Load Roller Single	2 x 3.7 inch
Load Roller Tandem	2.6 x 2.4 inch
Size of Forks	6.5 x 2 inch
Overall Fork Width	33 inch
Length of Forks	48 inch

Conforms to EN 1757-2

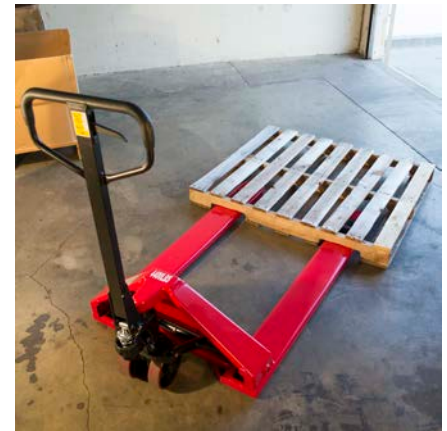

- Can access 4-way pallets from any direction
- 2 inch lowered and 6.5 inch raised height.
- 3-position hand control - Raise, lower, neutral
- Features the quality of our AC model standard hand pallet truck.

Fork Extensions



- Designed to be used when long objects or large pallets must be lifted and moved with a fork truck. It is required that extensions do not exceed length of forks on which they are installed by more than 50%.
- Welded steel construction. Fits onto forks up to 50mm thick. Steel retaining strap prevents forks extensions from sliding off forks during use. Powder coated yellow finish.

Fork Extensions

Model	PJ460-FE	PJ560-FE	PJ572-FE	PJ596-FE	PJ672-FE
Extended Length	60 inch	60 inch	72 inch	96 inch	72 inch
Min. Fork Length	40 inch	40 inch	48 inch	64 inch	48 inch
Fitting Fork Length	4 inch	5 inch	5 inch	5 inch	6 inch
Fork Width	5 inch	6 inch	6 inch	6 inch	7 inch

Model PJ3300-2743-HLT 3300 lb. Scissor Lift Pallet Jack

Scissor lift pallet trucks are designed to load and unload conveyor, feed presses, or any application requiring moving and positioning pallets or containers.

- Equipped with quick lift function doubles the lift speed for loads lighter than 400 lbs.
- With pressure relief valve and overload valve to prevent pump damages when load exceeds weight limits.
- The enclosed fork tips and reinforced fork frames ensures long service life.



Hand Scissor Lift Pallet Jack

Capacity	3300 lbs
Min. Fork Height	3.3 inch
Max Fork Height	31.5 inch
Size of Forks	6.4 x 2.0 inch
Width of Overall Forks	27 inch
Length of Fork	43.3 inch
Net Weight	275 lbs.
Fork Roller	3.0 x 2.0 inch
Big Wheel	6.0 x 2.0

Lift Table



- Lifting, Lowering, Transporting
- Always the correct working height
- Steel construction with platform made from sheet steel.
- Chrome plated handle.
- Foot pedal operated hydraulic lifting.
- Optional screw type lowering and cable type lowering.
- Available in five different sizes and capacities

Lift Table

Model	PJ330-TF15	PJ1100-TF50	PJ1650-TF75	PJ2200-TF100
Capacity	330 lbs	1100 lbs.	1650 lbs.	2200 lbs.
Min. Table Height	8.7 inch	11.2/13.4 inch	16.5 inch	15 inch
Max Table Height	28.3 inch	34.6 inch	39 inch	39 inch
Dimensions of Table	27.5 x 17.7 inch	32 x 20 inch	40 x 20 inch	40 x 20 inch
Caster Wheel	4.0 x 1.0 inch	5.0 x 1.3 inch	5.8 x 2.0 inch	5.0 x 2.0 inch
Foot Pedal Cycles to Max.	<28	<27	<45	<82
Net Weight	100 lbs.	178 lbs.	275 lbs.	308 lbs.

Model ZT50360 900 Lumen Color Matching Light

This color matching light is perfect for shops when inspecting during the polishing, painting and cleaning process. With a high CRI (Color Rendering Index), you can ensure that this light will reveal the true colors of your project.

- Aluminum body construction
- Versatile brightness management
- Stepless dimmer mode: 100~900 lumens
- Adjustable angle magnetic base
- Battery level indicator
- CRI>95



Specifications	
Battery	Li-ion 2200mAh 7.4 V
Input Voltage:	Input Voltage: 12V
Charging Time:	~ 4 hrs
Run Time:	~ 4 hrs / 1.5 hrs
IP Grade:	IP65



Model ZT50250 Color Matching Light Tripod Stand

- Max Height: 65.5"
- Min Height: 28.5"
- Net Weight: 4.6 lbs.
- Shipping Weight: 5.5 lbs.

**Note: Color Matching Light sold separately.*



Model ZT50365 400 Lumen Handheld Color Matching Light

- 400 Lumens (High) - 200 Lumens (Low)
- Top Mounted LED Inspection Light
- Battery level indicator
- 360 degree rotating magnetic base
- High Color Match Rating (CRI > 95)

Specifications	
Battery	Li-ion 2600mAh 3.7 V
Input Voltage:	Input Voltage: 5V
Charging Time:	~ 4 hrs
Run Time:	~ 3.5 hrs / 2 hrs
IP Grade:	IP65



Dead Blow Hammer Set

- Bright neon orange color stays visible in the workshop shuffle.
- Each hammer is filled with lead shot for extra force and shock absorption.
- Non-slip textured handle.
- Weights ranging from 1~4 and 6, 12 lbs.
- Also available in ZT20150: 4 pc set including 1, 2, 3, 4 lbs hammers.

Model	Weight	Overall Length
ZT20110	1 lb.	13 ½"
ZT20120	2 lbs.	13 ½"
ZT20130	3 lbs.	13 ½"
ZT20140	4 lbs.	13 ½"
ZT20150	1, 2, 3, 4 lbs. Set	13 ½"



Model ZT10200 / ZT10210 Vacuum Hand Sanding Blocks

- Use with abranet or hook and loop paper
- Great for dust free sanding
- Comes with vacuum adapter for 3/4" and 1" hose
- 2.75" Width
- Available in 5" and 8" long



ZT10200

ZT10210

Model ZT60100 3" Bench Grinder with Flex Shaft

- Perfect for deburring, grinding and polishing small parts.
- Variable speed up to 10,000 RPM
- Wheel size: 3" x 3/4"
- 31" Flex shaft for precision work and hard to reach areas.
- Cast iron base with vibration isolating pads.



Model ZT20170 Industrial 29 pc Black & Gold Drill Bit Set

- M2 Industrial HSS
- Jobber Length
- Fully Ground
- Self Centering
- 135 degrees split point



Model PN30200
1/4" Mini Ratchet Wrench

- 1/4" Square drive.
- Only 5 1/2" overall length.
- Great for removing small bolts and nuts in tight areas.
- Composite body for temperature insulation.



Model	PN30200
Capacity:	1/4"
Air Pressure:	90 psi
Free Speed:	240
Hose Size:	5/16"
Air Inlet:	1/4"
Ave. Air Consumption:	18 SCFM
Length:	5.5"
Net Weight	0.94 lbs.

Model PN30210
3/8" Mini Ratchet Wrench

- 3/8" Square drive.
- Only 5 1/2" overall length.
- Great for removing small bolts and nuts in tight areas.
- Composite body for temperature insulation.



Model	PN30210
Capacity:	3/8"
Air Pressure:	90 psi
Free Speed:	240
Hose Size:	5/16"
Air Inlet:	1/4"
Ave. Air Consumption:	18 SCFM
Length:	5.5"
Net Weight:	0.94 lbs.

Model PN30150
1/4" Air Die Grinder

- Rubber grip insulates against cold temperature and vibration.
- Air regulator allows for speed adjustment.
- Rear exhaust directs the exhaust away from the user and the work area.
- Use with 1/4" or 1/8" grinding accessories.



Model	PN30150
Capacity:	1/4"
Free Speed:	22,000
Air Inlet:	1/4"
Ave. Air Consumption:	3 SCFM
Length:	7"
Net Weight:	1.7 lbs.

Model PN30160
1/4" Air Angle Die Grinder

- Rubber grip insulates against cold temperature and vibration.
- Air regulator allows for speed adjustment.
- Rear exhaust directs the exhaust away from the user and the work area.
- Ideal for high speed grinding and polishing.
- Use with 1/4" or 1/8" grinding accessories.



Model	PN30160
Capacity:	1/4"
Free Speed:	18,000
Air Inlet:	1/4"
Ave. Air Consumption:	4.5 SCFM
Length:	7"
Net Weight:	2 lbs.

Model PN30120
5" Heavy Duty Grinder

- Powerful Twin Chamber Motor: Delivers high torque and power.
- Textured rubber grip and handle provide excellent vibration and temperature insulation.
- 360° rotating air cap to direct exhaust air away or into the work area.
- Adjustable wheel guard.



Model	PN30120
Grinding Wheel:	5"
Free Speed:	10,000
Air Inlet:	1/4"
Ave. Air Consumption:	5 SCFM
Length:	9.6"
Net Weight:	3.7 lbs.

Model PN30170
4" Extended Shaft Cutter

- Low profile for hard to reach areas.
- Reversible rotation directs the sparks away from the user.
- Composite housing insulates against cold temperature and provides great comfort and control.
- Thumb lever for switching spindle direction.



Model	PN30170
Grinding Wheel:	4"
Free Speed:	10,000
Air Inlet:	1/4"
Ave. Air Consumption:	5 SCFM
Length:	9.6"
Noise Level	84 dBA
Vibration	0.6 m/s ²
Net Weight:	3.7 lbs.

Model PN30130

3/8" Air Reversible Drill

- Composite housing insulates against cold temperatures and provides great comfort and control.
- Two gear design provides smooth running and longevity.
- Thumb lever for switching spindle direction.



Model	PN30130
Chuck Size:	3/8"
Spindle Thread:	3/8-24
Free Speed:	1,800
Min. Hose Size:	3/8"
Air Inlet:	1/4"
Ave. Air Consumption:	26 SCFM
Length:	7.6"
Net Weight:	2.4 lbs.

Model PN30140

1/2" Air Reversible Drill

- Composite housing insulates against cold temperatures and provides great comfort and control.
- Two gear design provides smooth running and longevity.
- Thumb lever for switching spindle direction.



Model	PN30140
Chuck Size:	1/2"
Spindle Thread:	3/8-24
Free Speed:	450
Min. Hose Size:	3/8"
Air Inlet:	1/4"
Ave. Air Consumption:	26 SCFM
Length:	9"
Net Weight:	3.5 lbs.

Model PN30192

Long Barrel Air Hammer w/ 5 pc Chisel Set

- Integrated quick chuck on barrel.
- Lighter fluted barrel for easier use.
- Spring vibration dampening system for comfortable use over extended periods of time.
- Center handle design for superior balance during use.
- 5 pc chisel set included.
- Blow molded storage/carrying case.

Model	PN30192
Stroke Size:	0.75"
Piston Diameter:	3.62"
Blow Per Minute:	2,200 Bpm
Air Inlet:	1/4"
Ave Air Consumption:	8.6 CFM
Hose Size:	3/8"
Air Pressure:	90 psi
Net Weight:	5.1 lbs.



Model PN30240
3" Compact Pistol Grip Polisher

- Light weight composite body.
- Adjustable speed.
- 2,100 RPM.
- Blow molded storage/carrying case.

- This kit includes:
 - Pistol grip polisher
 - Soft foam pad
 - Medium foam pad
 - 2 wool pads

Model	PN30240
Pad Size	3"
Spindle Thread	5/16"-24
Length	5.2"
Weight	1.79 lbs.



Model PN30250
3" Compact Pistol Grip Random Orbital Sander

- Light weight composite body.
- Adjustable speed.
- 15,000 RPM.
- Random orbital action.
- Blow molded storage/carrying case.

- This kit includes:
 - Pistol grip random orbital sander.
 - 3" PSA pad.
 - 3" hook & loop pad.
 - 400, 600, 800, 1200, 1500 grit sandpaper

Model	PN30250
Pad Size	3"
Spindle Thread	5/16"-24
Length	4.8"
Weight	1.79 lbs.



Model PN30260
2" / 3" Surface Conditioning Sander

- Light weight composite body.
- 16,000 RPM Ergonomic pistol grip orbital sander.
- Blow molded storage/carrying case.

- This kit includes:
 - 3" disc holder (1 pc)
 - 2" disc holder (1 pc)
 - 3" fine, medium, coarse surface conditioning disc (1 each)
 - 2" fine, medium, coarse, surface conditioning disc (1 each)
 - 3" 80, 100, 120 grit sanding disc (1 each)
 - 2" 80, 100, 120 grit sanding disc (1 each)

Model	PN30260
Air Consumption	3.5 CFM
Air Pressure	90 psi
Length	5.7"
Weight	1.5 lbs.



Model PN30184
Composite Air Dryer Gun

- Increases air flow 10:1
- Adjustable Inline Air Regulator
- Maximum pressure: 98 psi
- Working Pressure: 43 psi
- Weight: 9.34 oz
- Air Consumption: 7 cfm



Model PN30186
Air Dryer Guns with Stand

- Hold two air dryer guns.
- Adjustable height
- Dryer gun can be rotated and locked in any position.
- Steel construction.



PN30183 - Air Dryer Gun Stand only

Model SGPAR
Spray Gun Air Regulator



Model	SGPAR
Air Adjustment Range	0-160 PSI
Diaphragm	Yes
Inlet / Outlet	1/4"

Model HT-1930
Digital Spray Gun Air Regulator
Compact Size



Model	HT-1930
Air Adjustment Range	0-99.8 PSI
Diaphragm	No
Inlet / Outlet	1/4"

Gravity Feed HVLP Spray Gun



Model PN10250
1.3 mm Green Tip

Model PN10260
1.5 mm Gold Tip

Model PN10270
1.7 mm Red Tip

Model PN10280
2.0 mm Blue Tip

Model PN10290
2.3 mm Black Tip

Air Pressure	29-36 psi
Air Inlet	1/4"
Air Consumption	16 CFM
Capacity of Cup	0.6 L

Type of Cup	Plastic Nylon
Fluid Tip Size	1.3 mm / 1.5 mm / 1.7 mm / 2.0 mm / 2.3 mm
Feed Type	Gravity
Pattern Width	approx. 27 cm / 10.6"

5" & 6" Vertech Composite Housing Random Orbital Sander

- 3/16" or 3/32" Orbit
- Air Pressure: 90 psi
- Free Speed: 12,000 rpm
- Pad included
- Air Inlet: 1/4"

Superior Handling Features:

- Low vibration, smooth running design
- Variable speed palm throttle lever
- Formed to fit comfortably in your hand
- Adjustable speed control



Available in a complete variety of Palm-Style Non-vacuum, Central vacuum, and Self-generating vacuum models.



Non-Vacuum



Central Vacuum



Self-Generated Vacuum

MODEL	Description	5" ROS		6" ROS	
	12,000 RPM	3/16 in. ORBIT	3/32 In. ORBIT	3/16 in. ORBIT	3/32 In. ORBIT
NON-VACUUM	LOW-PROFILE, PSA	VT51000	VT51000S	VT61000	VT61000S
	LOW-PROFILE, HOOK	VT51100	VT51100S	VT61100	VT61100S
	TAPERED EDGE, PSA	VT51200	VT51200S	VT61200	VT61200S
	TAPERED EDGE, HOOK	VT51300	VT51300S	VT61300	VT61300S
CENTRAL VACUUM	LOW-PROFILE, PSA	VT52000	VT52000S	VT62000	VT62000S
	LOW-PROFILE, HOOK	VT52100	VT52100S	VT62100	VT62100S
	TAPERED EDGE, PSA	VT52200	VT52200S	VT62200	VT62200S
	TAPERED EDGE, HOOK	VT52300	VT52300S	VT62300	VT62300S
	LP, SCREEN ABRASIVE, HOOK	VT52400	VT52400S	VT62400	VT62400S
SELF-GENERATED VACUUM	LOW-PROFILE, PSA	VT53000	VT53000S	VT63000	VT63000S
	LOW-PROFILE, HOOK	VT53100	VT53100S	VT63100	VT63100S
	TAPERED EDGE, PSA	VT53200	VT53200S	VT63200	VT63200S
	TAPERED EDGE, HOOK	VT53300	VT53300S	VT63300	VT63300S
	LP, SCREEN ABRASIVE, HOOK	VT53400	VT53400S	VT63400	VT63400S

3", 5" & 6" AirVANTAGE Random Orbital Sander

- 3/16" or 3/32" Orbit
- Air Pressure: 90 psi
- Free Speed: 12,000 rpm
- Pad included
- Air Inlet: 1/4"



3" Light Weight

The AirVANTAGE™ LP (Low Profile) Sanders comes the lowest profile in the industry with rock solid engineering, materials, and craftsmanship.

Ergonomically designed to deliver greater control, balance and comfort, the AirVANTAGE™ LP generates up to .28 HP for fast, efficient performance over virtually every application.

Available in a complete variety of Palm-Style Non-vacuum, Central vacuum, and Self-generating vacuum models.



Non-Vacuum



Central Vacuum



Self-Generated Vacuum

MODEL	Description	3" ROS Light Weight		5" ROS		6" ROS	
	12,000 RPM	3/16 in. ORBIT	3/32 In. ORBIT	3/16 in. ORBIT	3/32 In. ORBIT	3/16 in. ORBIT	3/32 In. ORBIT
NON-VACUUM	LOW-PROFILE, PSA	030290	030200	050300	050200	060300	060200
	TAPERED EDGE, PSA	-	-	050301	050201	060301	060201
	LOW-PROFILE, HOOK	030291	030201	050302	050202	060302	060202
	TAPERED EDGE, HOOK	-	-	050304	050203	060303	060203
CENTRAL VACUUM	LOW-PROFILE, PSA	030311	030234	050334	050234	060334	060234
	TAPERED EDGE, PSA	-	-	050335	050235	060335	060235
	LOW-PROFILE, HOOK	030312	030235	050336	050236	060336	060236
	TAPERED EDGE, HOOK	-	-	050337	050237	060337	060237
	LP, SCREEN ABRASIVE, HOOK	-	-	050338	050238	060338	060238
SELF-GENERATED VACUUM	LOW-PROFILE, PSA	030331	030267	050367	050267	060367	060267
	TAPERED EDGE, PSA	-	-	050368	050268	060368	060268
	LOW-PROFILE, HOOK	030332	030268	050369	050269	060369	060269
	TAPERED EDGE, HOOK	-	-	050370	050270	060370	060270
	LP, SCREEN ABRASIVE, HOOK	-	-	050371	050271	060371	060271

3" x 4" Orbital Sander 1/8" Orbit




Features:

- Lightest weight full size orbital sander in the world
- All models feature a full 10,000 RPM
- Pad suspension system that produces unmatched performance .
- Pad remains flat throughout full orbit at any speed.
- Low weight, superior balance and minimum vibration give the operator full control and freedom from fatigue.

3-2/3" x 7" Orbital Sander 3/16" Orbit




MODEL	DESCRIPTION	3" X4" ORBITAL SANDER	3 2/3" X7" ORBITAL SANDER
		10,000 RPM	1/8in. ORBIT
NON-VACUUM	PSA, CLIP TYPE	-	470000
	LOW-PROFILE, PSA	34000	470001
	LOW-PROFILE, HOOK	34001	470002
CENTRAL VACUUM	LOW-PROFILE, PSA	340034	470034
	LOW-PROFILE, HOOK	340035	470037
SELF-GENERATED VACUUM	LOW-PROFILE, PSA	340067	470067
	LOW-PROFILE, HOOK	340068	470070

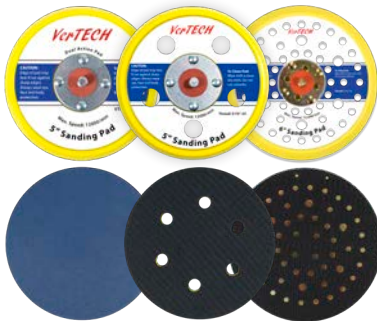

VerTECH™ Premium Back-Up Pads • 5/16"-24 Thread Size • Maximum 12,000 RPM

MODEL	DESCRIPTION	LOW-PROFILE, PSA	LOW-PROFILE, HOOK	TAPERED EDGE, PSA	TAPERED EDGE, HOOK	LP, SCREEN ABRASIVE, HOOK
NON-VACUUM	5"	VT50100	VT50101	VT50300	VT50301	—
	6"	VT60100	VT60101	VT60300	VT60301	—
VACUUM	5"	VT50110	VT50111	VT50310	VT50311	VT50312
	6"	VT60110	VT60111	VT60310	VT60311	VT60312

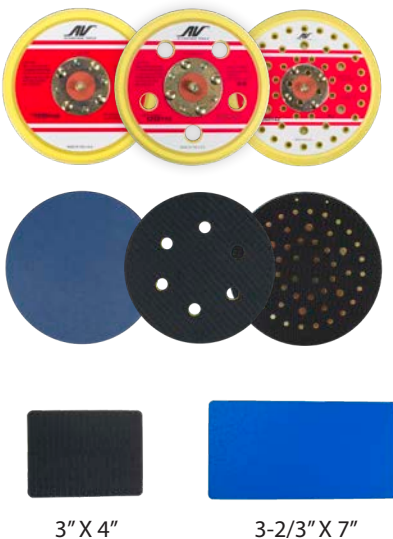

AirVANTAGE Tools Back-Up Pads • 5/16"-24 Thread Size • Maximum 12,000 RPM

MODEL	DESCRIPTION	LOW-PROFILE, PSA	LOW-PROFILE, HOOK	TAPERED EDGE, PSA	TAPERED EDGE, HOOK	LP, SCREEN ABRASIVE, HOOK
NON-VACUUM	3"	1232100	1232101	—	—	—
	5"	1250100	1250101	1250300	1250301	—
	6"	1260100	1260101	1260300	1260301	—
VACUUM	3"	1232110	1232111	—	—	—
	5"	1250110	1250111	1250310	1250311	1250142
	6"	1260110	1260111	1260310	1260311	1260142
NON-VACUUM	3"X4"	1273500	1273501	1273502	—	—
	3 2/3"X7"	1273300	1273301	1273302	—	—
VACUUM	3"X4"	1273510	1273511	1273512	—	1273542
	3 2/3"X7"	1273310	1273311	1273312	—	1273342

3", 5" & 6" AirVANTAGE Advanced Random Orbital Sander

- 3/16" or 3/32" Orbit
- Free Speed: 12,000 rpm
- Air Inlet: 1/4"
- Air Pressure: 90 psi
- Pad included

- The lowest profile in the industry provides unparalleled control, maneuverability, and feedback.
- Vibration absorbing "comfort grips" improve feel and reduce hand fatigue.
- Underside Speed Control combines "on the fly" speed adjustability while helping to prevent inadvertent "slip switching."
- Patented fan blade cooling system for lowering bearing and spindle temperature for longer tool life.
- 360 degree rotation air exhaust shutters, provides different air exhaust directions for users.



Available in a complete variety of Palm-Style Non-vacuum, Central vacuum, and Self-generating vacuum models.



Non-Vacuum



Central Vacuum



Self-Generated Vacuum

MODEL	Description	3" ROS		5" ROS		6" ROS	
	12,000 RPM	3/16 in. ORBIT	3/32 In. ORBIT	3/16 in. ORBIT	3/32 In. ORBIT	3/16 in. ORBIT	3/32 In. ORBIT
NON-VACUUM	LOW-PROFILE, PSA	AD-031300	AD-031200	AD-051300	AD-051200	AD-061300	AD-061200
	TAPERED EDGE, PSA	-	-	AD-051301	AD-051201	AD-061301	AD-061201
	LOW-PROFILE, HOOK	AD-031302	AD-031202	AD-051302	AD-051202	AD-061302	AD-061202
	TAPERED EDGE, HOOK	-	-	AD-051303	AD-051203	AD-061303	AD-061203
CENTRAL VACUUM	LOW-PROFILE, PSA	AD-031334	AD-031234	AD-051334	AD-051234	AD-061334	AD-061234
	TAPERED EDGE, PSA	-	-	AD-051335	AD-051235	AD-061335	AD-061235
	LOW-PROFILE, HOOK	AD-031336	AD-031236	AD-051336	AD-051236	AD-061336	AD-061236
	TAPERED EDGE, HOOK	-	-	AD-051337	AD-051237	AD-061337	AD-061237
	LP, SCREEN ABRASIVE, HOOK	-	-	AD-051338	AD-051238	AD-061338	AD-061238
SELF-GENERATED VACUUM	LOW-PROFILE, PSA	AD-031367	AD-031267	AD-051367	AD-051267	AD-061367	AD-061267
	TAPERED EDGE, PSA	-	-	AD-051368	AD-051268	AD-061368	AD-061268
	LOW-PROFILE, HOOK	AD-031369	AD-031269	AD-051369	AD-051269	AD-061369	AD-061269
	TAPERED EDGE, HOOK	-	-	AD-051370	AD-051270	AD-061370	AD-061270
	LP, SCREEN ABRASIVE, HOOK	-	-	AD-051371	AD-051271	AD-061371	AD-061271

5" & 6" AirVANTAGE "Advanced" Electric Random Orbital Sander

- 3/16" or 3/32"
- Significant energy cost savings vs. pneumatic sanders
- Closed construction design prevents dust from fouling the motor and extending the motor life.
- Low maintenance, long runtime and long lifespan.
- Patented fan blade cooling system for longer tool life.
- No external power supply
- Vibration absorbing "comfort grip" reduces hand fatigue.
- Sealed circuit board protects against dust & moisture.
- User friendly speed control with variable speed settings.



Adjustable speed settings:
4,000, 7,000 and 10,000 RPM
Power: 350W
Input Voltage: 120V

Note: All Vacuum machines use 1 in. Vacuum Hose Fittings Standard. 3/4 in. is available.



Non-Vacuum



Central Vacuum

MODEL	Description	5" ROS		6" ROS	
	10,000 RPM	3/16 in. ORBIT	3/32 In. ORBIT	3/16 in. ORBIT	3/32 In. ORBIT
NON-VACUUM	LOW-PROFILE, PSA	AE-051100	AE-051000	AE061100	AE-061000
	TAPERED EDGE, PSA	AE-051100TE	AE-05100TE	AE-061100TE	AE-061000TE
	LOW-PROFILE, HOOK	AE-051102	AE-051002	AE-061102	AE-061002
	TAPERED EDGE, HOOK	AE-051102TS	AE-051002TE	AE-061102TE	AE-061002TE
CENTRAL VACUUM	LOW-PROFILE, PSA	AE-051134	AE-051034	AE-061134	AE-061034
	TAPERED EDGE, PSA	AE-051134TE	AE-051034TE	AE-061134TE	AE-061034TE
	LOW-PROFILE, HOOK	AE-051136	AE-051036	AE-061136	AE-061036
	TAPERED EDGE, HOOK	AE-051136TE	AE-051036TE	AE-061136TE	AE-06106TE
	LP, SCREEN ABRASIVE, HOOK	AE-051138	AE-051038	AE-061138	AE-061038

Model RZ-300mini NEW

Rezervo™ Batteryless Jump Starter


- Designed for both the professionals and DIY users.
- Simple and safe to use.
- No batteries inside.
- No need to wait hours to recharge.
- Even starts vehicles without a battery.
- Ideal for cold starts on engines.

New Features

- Less wait time to charge up the capacitors
- LCD Display - shows battery voltage, percent charged, reverse polarity and override
- Alarm buzzer when fully charged or activating override function
- Compact and lightweight design with detachable cables
- LED light for locating battery terminals
- 12V battery trickle charger*



iPhone 7 Plus vs. RZ-300mini

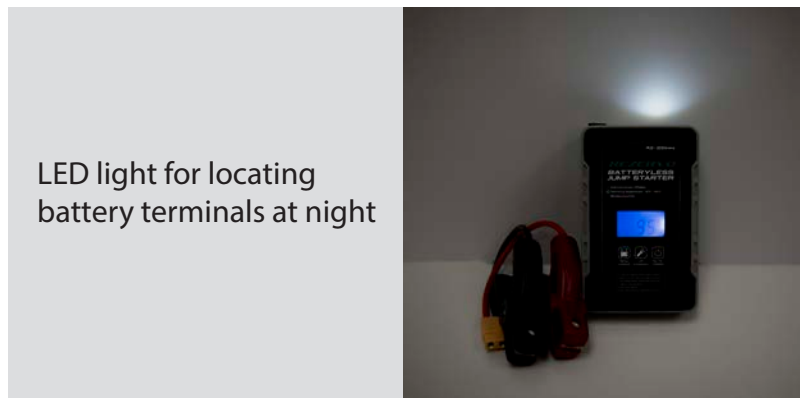

LED light for locating battery terminals at night

How it Works

The REZERVO™ batteryless jump starter uses ultracapacitor technology. It is able to harness the power from your weak battery and boost it to start your car. With built-in intelligent circuitry designs, it also prevents you from making mistakes while using the jump starter.

Model	RZ-300mini
Input	12V DC 10A, 5V DC 2A
Starting Current	300A
Working Temperature	-30°F to 140°F
Recharge Time from Battery	~60 seconds
Recharge Time from 12V Socket	~85 seconds
Recharge Time from USB	~25 minutes

- For gasoline engines
- Built-in Reverse Polarity and Short Circuit Protection
- Built-in voltmeter
- No degradation in performance with subfreezing temperatures or age

* When connected to a USB charging block 5V 2A output

** Micro USB charging time will vary depending the amperage (i.e. lower amperage will result in longer charging time)

Model RZ-300

Rezervo™ Batteryless Jump Starter

- Designed for both the professionals and DIY users
- Simple and safe to use
- No batteries inside
- No need to wait hours to recharge
- Even starts vehicles without a battery
- Ideal for cold starts on engines
- 300A Starting current
- Maintenance Free
- For gasoline and diesel engines
- Built-in Reverse Polarity and Short Circuit Protection
- Built-in voltmeter
- No degradation in performance with subfreezing temperatures or age



How it Works:

The REZERVO™ batteryless jump starter uses ultracapacitor technology. It is able to harness the power from your weak battery and boost it to start your car. With built-in intelligent circuitry designs, it also prevents you from making mistakes while using the jump starter.

Specifications:

Model	RZ-300
Input	12V DC 10A, 5V DC 2A
Starting Current	300A
Working Temperature	-30°F to 140°F
Recharge Time from Battery	~100 seconds
Recharge Time from 12V Socket	~150 seconds
Recharge Time from USB	~25 minutes

*Micro USB charging time will vary depending on the amperage (i.e. lower amperage will result in longer charging time)

Multiple Charging Methods:



From your own weak battery



From USB



From 12V Socket

- For gasoline and diesel engines
- Built-in Reverse Polarity and Short Circuit Protection
- Built-in voltmeter
- No degradation in performance with subfreezing temperatures or age





Model RZ-550 **NEW**
 Rezervo™ Supercapacitor Jump Starter




Specifications:

Model	RZ-550
Input	12V DC 10A, 5V DC 2A
Starting Current	550A
Working Temperature	-30°F to 140°F
Recharge Time from Battery	~120 seconds
Recharge Time from 12V Socket	~200 seconds
Recharge Time from USB	~30-40 minutes



 www.jackco.com

 orderdesk@jackco.com

 (888) 4JACKCO



Jackco Transnational Inc. warrants all "JACKCO", "Pneustream by JACKCO", and "ZETA by JACKCO" branded products to the original purchaser against any manufacturing defect in material or workmanship for a period of one (1) year from the original date of purchase unless otherwise stated. If the defective product is determined to be covered under this warranty, it shall be repaired or replaced at manufacturer's discretion without charge. Provided that the product must be returned with proof of purchase and freight prepaid when returned to the manufacturer. This warranty shall not apply to damage due to accident, negligent use, lack of maintenance, abuse or applications other than the specific function the product is designed for.

No other warranties, expressed or implied, including those of merchantability or fitness for particular purpose shall be applicable to Jackco except as specifically stated herein. In no event shall Jackco be liable to any party for any special, direct, indirect, consequential, punitive damage of any nature caused by the sale or use of the equipment, tool, or product.

Note: This warranty gives the original purchaser specific legal rights which may vary from state to state.



USD \$: 3.00
Copyright © 1994-2020 by Jackco Transnational Inc.