

# **COMMERCIAL FANS**

Improve comfort and visual appeal in public and corporate spaces with the impressive airflow and elegant design of Big Ass Fans' commercial products.



# **ENHANCE YOUR PUBLIC PROFILE**

Engineered with the same uncompromising standards for performance and durability as our industrial fans, Big Ass Fans' commercial lineup showcases award-winning design and functionality. Our Essence<sup>®</sup>, Isis<sup>®</sup>, Haiku<sup>®</sup>, and i6 fans each sport premium-quality airfoils, virtually silent direct-drive motors, and a range of sizes and finishes to provide airflow that delivers proven comfort and savings for spaces that look great and feel even better.

# **BOOST YOUR AIRFLOW AND DESIGN APPEAL HERE:**

- $\checkmark\,$  Lobbies and conference rooms
- ✓ Retail spaces
- ✓ Restaurants and patios
- $\checkmark$  Offices and break rooms
- ✓ Recreational spaces
- ✓ Arenas and large open areas


## **Key Features**

- Fit any space with diameters ranging from 52 inches to 14 feet (1.3 to 4.3 m)
- ✓ Improve your aesthetic with custom finishes and mounts
- Brighten entryways and meeting rooms with available LED light kits
- $\checkmark$  Range of slim remote and wall control options
- $\checkmark$  Available certified install works with your schedule
- $\checkmark\,$  Enjoy unrivaled warranties and customer service

ESSENCE



# THE BEST FAN FOR A BIG SPACE, INDOORS OR OUT

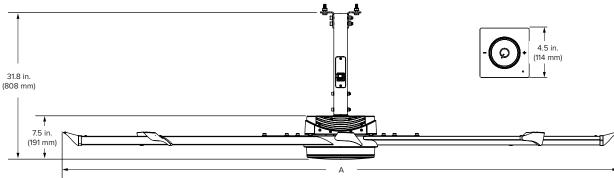

Pictured with a 2 ft (610 mm) extension tube

Technical Specifications											
Diameter (A)	Weight <sup>1</sup>	Max Speed	Input Power and Required Breaker	Airfoil Clearances <sup>2</sup>	Sound at Max Speed <sup>3</sup>	IP Rating	Max Operating Temperature	Environment <sup>4</sup>			
8 ft (2.4 m)	75 lb (34 kg)	158 RPM									
10 ft (3 m)	81 lb (37 kg)	107 RPM	110–125 VAC, 1 Ф, 50/60 Hz, 10 A	2 ft (0.6 m) on sides	< 35 dBA	IP43	-4°F to 131°F	Suitable for indoor			
12 ft (3.7 m)	88 lb (40 kg)	76 RPM	200–240 VAC, 1 Ф, 50/60 Hz, 10 A	2 ft (0.6 m) below ceiling deck	< 35 UBA	1P45	(-20°C to 55°C)	or outdoor spaces			
14 ft (4.3 m)	96 lb (44 kg)	56 RPM									


Construction Features									
Airfoils	Motor and Drive	<b>Certifications</b> <sup>5</sup>	Mounting	Accessories	Colors				
Eight anodized Mini- Ellipto airfoils with winglets (black or silver)	Gearless direct drive motor	UL Standard 507 and CSA Standard 22.2 No. 113	Standard upper mount installs to bar joists Optional kits allow for mounting to I-beams, solid beams, and purlins	LED Light Wireless Wall Controller	Standard colors are silver and black. Individualize your fan with one of our classic color upgrades, or work with our design consultants to create a shade that's all your own.				

#### **Standard Color Options**





White Motor Housing with Silver Trim





Silver Motor Housing with Black Trim

CAMALA GROUP 🔋 +52 (656) 638 1985

SERGIO AMADOR / VENTAS

## LED Light



See the Essence LED spec sheet for details.

## **Control Options**



Wired Wall Controller



Wireless Wall Controller (Optional)

Lead times may vary. See full warranty for coverage information.

sight does not include mount or extension tube. Itable for ceilings as low as 12 ft (37 meters). Measure the distance from the tip of the winglet to the ceiling or major obstruction. is are sound tested a maximum speech in alaboratory environment. Actual results in field conditions may vary due to sound reflecting surfaces and environmental conditions. It suitable for salt air environments. striffcations listed here apply to the fan and do not include accessories.

🗹 sergio@camalagroup.com

