

DUAL HEAD SECURITY WITH OR WITHOUT MOTION SENSOR



Features:

- Die-cast aluminum body and heads
- Impact resistant lenses
- UV Stabilized powder coated finish
- Recessed junction box required
- 100-277V (without motion sensor)
- 120V (with motion sensor)
- Operating temperature:
-30°C to 50°C (-22°F to 122°F)
- 5 Year warranty



Black (no sensor)




DUAL HEAD SECURITY WITH OR WITHOUT MOTION SENSOR



White (with sensor)



Bronze (no sensor)

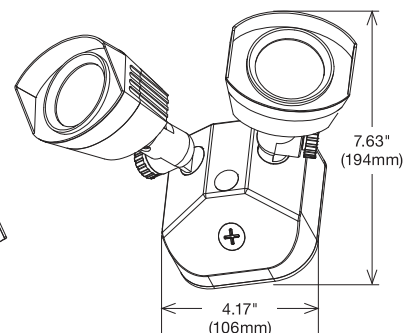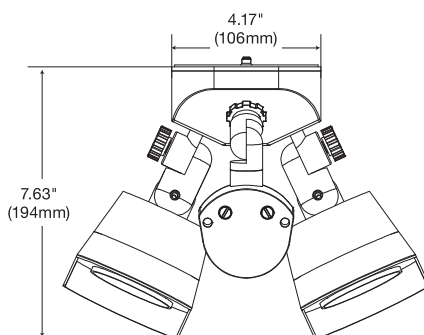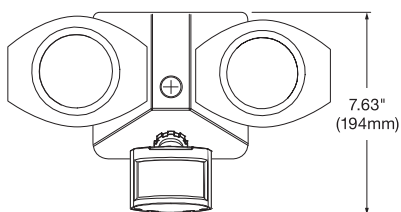

Motion Sensor Specifications


- 1 Time setting: 10 seconds to 10 minutes
- Detection angle: 180°
- Detection range: 10 feet to 60 feet
- Dusk to dawn feature
- Manual override

Item	Description	V	CCT	Pack
65-210	White	100-277V	3000K	5
65-211	White w/Sensor	120V	3000K	5
65-212	Bronze	100-277V	3000K	5
65-213	Bronze w/Sensor	120V	3000K	5
65-214	Black	100-277V	3000K	5
65-215	Black w/Sensor	120V	3000K	5
65-216	White	100-277V	4000K	5
65-217	White w/Sensor	120V	4000K	5
65-218	Bronze	100-277V	4000K	5
65-219	Bronze w/Sensor	120V	4000K	5
65-220	Black	100-277V	4000K	5
65-221	Black w/Sensor	120V	4000K	5

*Consult Satco or visit www.satco.com for an up to date dimmer compatibility list. See warranty for details.

Product sheet NU1537

Specifications

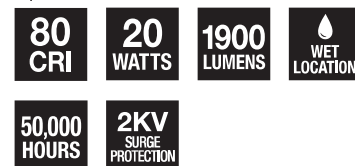

Certifications



DUAL HEAD SECURITY WITH OR WITHOUT MOTION SENSOR



Features:

- Die-Cast Aluminum Body and Heads
- UV Stabilized powder coated finish
- Recessed and External J-box Mounting
- 100-277V (without motion sensor)
- 120V (with motion sensor)
- Operating temperature:
-30°C to 50°C (-22°F to 122°F)
- 5 Year warranty



Black (no sensor)

DUAL HEAD SECURITY WITH OR WITHOUT MOTION SENSOR






White (no sensor)



Bronze (with sensor)

Motion Sensor Specifications

- 1 Time setting: 10 seconds to 10 minutes
- Detection angle: 180°
- Detection range: 10 feet to 60 feet
- Dusk to dawn feature
- Manual override

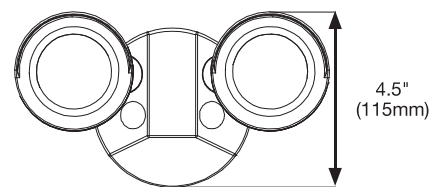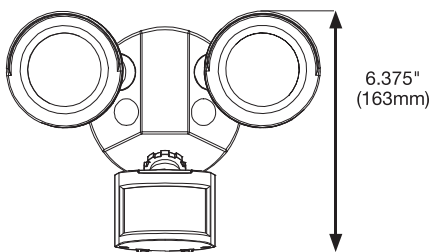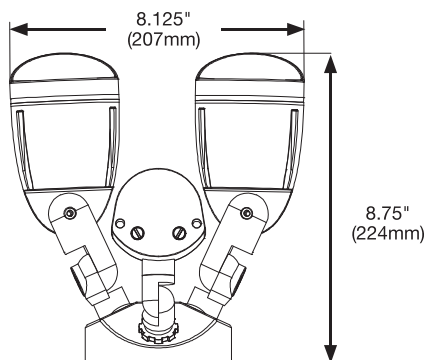

Item	Description	V	CCT	Pack
65-710	White	100-277V	3000K	5
65-711	White w/Sensor	120V	3000K	5
65-712	Bronze	100-277V	3000K	5
65-713	Bronze w/Sensor	120V	3000K	5
65-714	Black	100-277V	3000K	5
65-715	Black w/Sensor	120V	3000K	5
65-716	White	100-277V	4000K	5
65-717	White w/Sensor	120V	4000K	5
65-718	Bronze	100-277V	4000K	5
65-719	Bronze w/Sensor	120V	4000K	5
65-720	Black	100-277V	4000K	5
65-721	Black w/Sensor	120V	4000K	5

Specifications

80 CRI	20 WATTS	1900 LUMENS	WET LOCATION
50,000 HOURS	IP 65	2KV SURGE PROTECTION	

Certifications

ETL	ENERGY STAR	FC	RoHS COMPLIANT
------------	--------------------	-----------	--------------------------

*Consult Satco or visit www.satco.com for an up to date dimmer compatibility list. See warranty for details.

LANDSCAPE FLOODS



Features:

- 6W, 9W and 12W Options
- Dark Gray, Light Gray or Bronze finish
- Die cast aluminum body
- No transformer required
- 1/2" Threaded knuckle mount
- UV stabilized powder coated finish
- 60° Beam angle
- cULus
- 5 Year warranty



12W, PAR30 Size
Light Gray

LANDSCAPE FLOODS




Accessories



Item	Description	W	Lm	Pack
PAR16				
62-1200	6W Landscape Flood (PAR16 size) - Bronze	6	640	12
62-1201	6W Landscape Flood (PAR16 size) - Dark Gray	6	640	12
62-1202	6W Landscape Flood (PAR16 size) - Light Gray	6	640	12
PAR20				
62-1203	9W Landscape Flood (PAR20 size) - Dark Gray	9	900	12
62-1204	9W Landscape Flood (PAR20 size) - Light Gray	9	900	12
62-1205	9W Landscape Flood (PAR20 size) - Bronze	9	900	12
PAR30				
62-1206	12W Landscape Flood (PAR30 size) - Bronze	12	1240	12
62-1207	12W Landscape Flood (PAR30 size) - Dark Gray	12	1240	12
62-1208	12W Landscape Flood (PAR30 size) - Light Gray	12	1240	12
Accessories				
60-673	1 Light Die Cast Mounting Plate - Light Gray			96
60-674	2 Light Die Cast Mounting Plate - Light Gray			96
60-675	1 Light Die Cast Mounting Plate - Dark Gray			96
60-676	2 Light Die Cast Mounting Plate - Dark Gray			96
76-665	1 Light Die Cast Mounting Plate - Bronze			24
76-666	2 Light Die Cast Mounting Plate - Bronze			96
60-677	2" Diameter Pvc Mounting Post - Dark Gray			24
60-678	3" Diameter Pvc Mounting Post - Dark Gray			24
60-679	2" Diameter Pvc Mounting Post - Light Gray			24
60-680	3" Diameter Pvc Mounting Post - Light Gray			24
76-641	3" Diameter Pvc Mounting Post - Bronze			24
76-640	2" Diameter Pvc Mounting Post - Bronze			24

Specifications

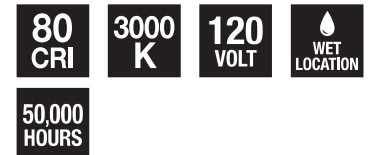

Certifications



See warranty for details.

Product sheet NUI394

STEP LIGHTS



Features:

- Rugged construction
- No transformer required
- Easy installation
- UV stabilized powder coated finish
- Bronze, White or Gray finish
- Minimum interior box volume of 13 cubic inches.
- 5 Year warranty



Horizontal Step Light Bronze


STEP LIGHTS



Horizontal Step Light White



Horizontal Step Light Gray

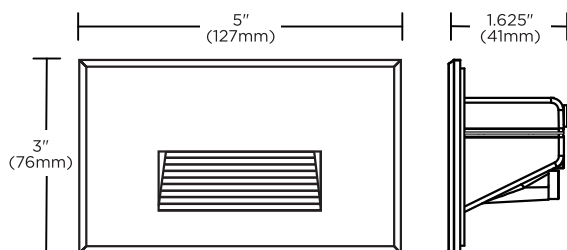


Vertical Step Light Bronze



Vertical Step Light White



Vertical Step Light Gray

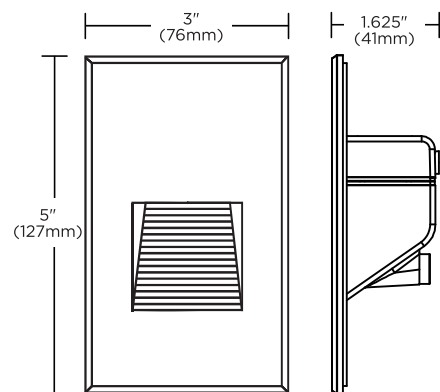

Item	Description	W	Lm	Pack
Vertical				
65-401	Step Light - Bronze	3	200	24
65-405	Step Light - White	3	200	24
65-409	Step Light - Gray	3	200	24
Horizontal				
65-403	Step Light - Bronze	5	407	24
65-407	Step Light - White	5	407	24
65-411	Step Light - Gray	5	407	24

*Consult Satco or visit www.satco.com for an up to date dimmer compatibility list. Minimum interior box volume of 13 cubic inches. See warranty for details.

Product sheet NUI393

Specifications

80 CRI
3000 K
120 VOLT
DIMMABLE

WET LOCATION
50,000 HOURS

Certifications



1 LIGHT UP OR DOWN OUTDOOR WALL



Features:

- Die-cast aluminum body
- UV stabilized powder coated finish
- White, Black or Bronze finish
- Operating temp: -30°C to 50°C (-22°F to 122°F)
- 40° Beam spread
- IP65
- 5 Year warranty




Small Black in "DOWN" position

1 LIGHT UP OR DOWN OUTDOOR WALL

Large wall shown in "DOWN" position



Small wall shown in "UP" position

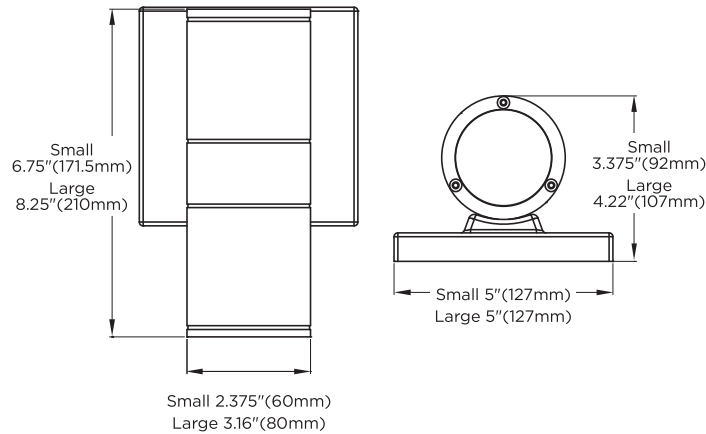

Item	Description	Pack
62-1137	1 Light Small Up or Down - White	10
62-1138	1 Light Small Up or Down - Black	10
62-1139	1 Light Small Up or Down - Bronze	10
62-1147	1 Light Large Up or Down - White	5
62-1148	1 Light Large Up or Down - Black	5
62-1149	1 Light Large Up or Down - Bronze	5

See warranty for details.

Product sheet NU1535

Specifications

10 WATTS	900 LUMENS	90 CRI	3000 K
120-277V	WET LOCATION	50,000 HOURS	2KV SURGE PROTECTION
UP OR DOWN			

Certifications

UL LISTED	ENERGY STAR	FC	RoHS COMPLIANT
---------------------	--------------------	-----------	--------------------------

2 LIGHT UP AND DOWN OUTDOOR WALL




Features:

- Die-cast aluminum body
- UV stabilized powder coated finish
- White, Black or Bronze finish
- 40° Beam spread
- Operating temp: -30°C to 50°C (-22°F to 122°F)
- IP65
- 5 Year warranty



Small Black

2 LIGHT UP AND DOWN OUTDOOR WALL

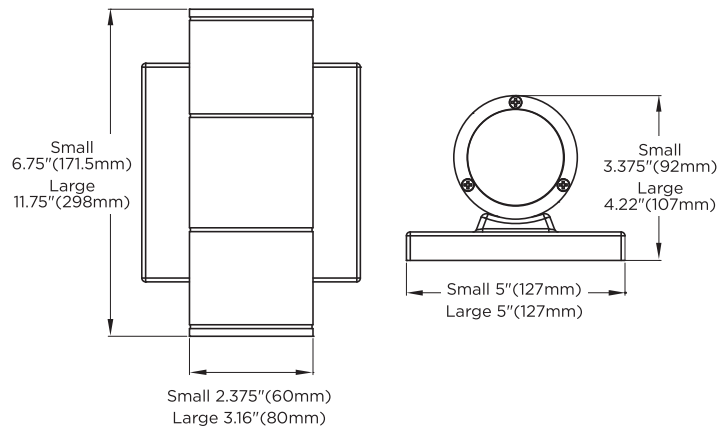


Item	Description	W	Lm	Pack
62-1141R1	2 Light Small Up and Down - White	10	900	5
62-1142R1	2 Light Small Up and Down - Black	10	900	5
62-1145R1	2 Light Small Up and Down - Bronze	10	900	5
62-1143R1	2 Light Large Up and Down - White	20	1800	5
62-1144R1	2 Light Large Up and Down - Black	20	1800	5
62-1146R1	2 Light Large Up and Down - Bronze	20	1800	5

See warranty for details.

Product sheet NU136

Specifications

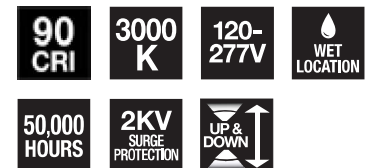

Certifications



BULKHEAD WALL



Features:

- Rugged construction
- Die-cast aluminum body
- UV stabilized powder coated finish
- (4) 1/2" Knockouts
- White or Black finish with Frosted glass
- Suitable for wet locations
- Operating temperature:
-20°C to 40°C (-40°F to 104°F)
- 5 Year warranty




Bulkhead Black

BULKHEAD WALL



Bulkhead White

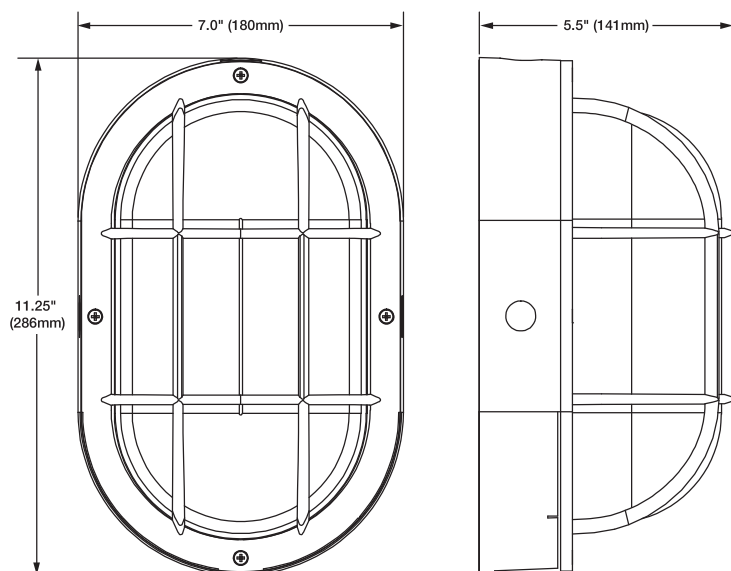

Item	Description	Lm	Pack
65-113	Bulkhead - White	1440	2
65-114	Bulkhead - Black	1440	2

See warranty for details.

Product sheet NU1361

Specifications

**20
WATTS**

**90
CRI**

**100-
277V**


**WET
LOCATION**

**50,000
HOURS**

**3KV
SURGE
PROTECTION**

Certifications




7" AND 10" DISK



Features:

Complies with NEC 410.16 (A)(3) and
NEC 410.16 (C)(5)

Mounts to 3" & 4" junction boxes -
includes cross bar

Durable white lens (PMMA)

5 Year warranty



10" Brushed Nickel