


# DCP100

A cost-effective and precise micropositioner for I-V/C-V and RF probing.

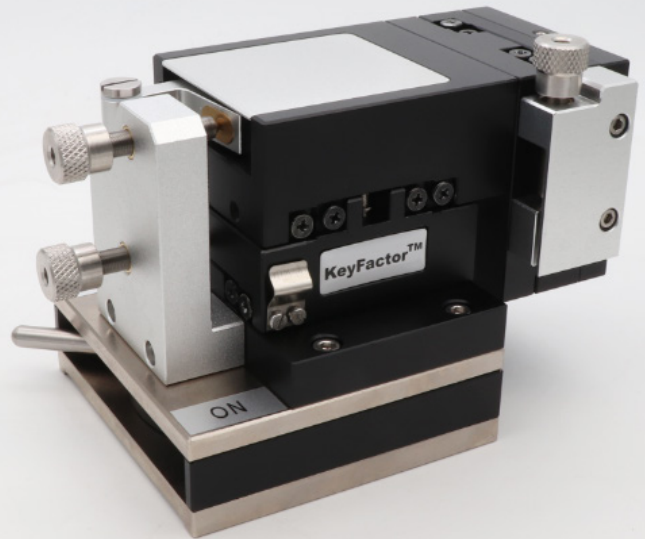

## Application

I-V/C-V, Pulsed I-V Probing.

RF probing.

## Features

- In line design – Space saving design, compact footprint for more positioners on the platen.
- Stable and backlash free – Highly rigid structure, spring loaded X-Y-Z, stable and backlash free.
- Accurate probe placement – U.S. originated high precision screws for accurate probe placement.
- Linear motion – Precisely machined glides assures motion linearity.

## Specifications

Accuracy	2 $\mu$ m
X-Y-Z Travel Range	12.5mm*12.5mm*12.5mm
TPI	100
Mounting	Magnetic - On/Off function
Dimensions	112mm*72(W*D), footprint 132mm*72mm*92mm (W*D*H), screws included

Specifications and designs are subject to change without notice.

## Ordering Information

DCP100	DCP100 micropositioner with magnetic mounting on/off function.
S10	S10 series probe holders for I-V/C-V, pulsed I-V measurements.
FemtoProbe	Ultra low noise coax probe for optimized I-V, pulsed I-V measurement.
CPA-10	Coax probe for optimized C-V, LCR, Pulsed I-V measurement.
FP-A100	Adapter for FemtoProbe or CPA-10 probe.
FP-A200	Pivoted adapter for FemtoProbe or CPA-10 probe.

All Rights Reserved. KeyFactor Systems, Inc.

**KeyFactor Systems, Inc.**

[www.keyfactorsystems.com](http://www.keyfactorsystems.com)  
[sales@keyfactorsystems.com](mailto:sales@keyfactorsystems.com)  
[technical-support@keyfactorsystems.com](mailto:technical-support@keyfactorsystems.com)

U.S.

Add: 8825 53 AVE Elmhurst, New York, United States.

Tel: +1(347) 994-9951

China

Add: 5th FL, Sohovark, Industrial Rd. South, SSL, Dongguan.

Tel: +86(769)2223-8503

Fax: +86(769)2223-0701