


OP20V Sleeve
Standard sleeve length is 4" if not specified by customer.
Other sleeve lengths are available upon request.

OP20V Security Grill
Standard finish is Primer Grey.
Powder Coat finishes are available upon request.

5/16-18 x 1 Security
Screw, Center Pin,
Torx Drive

Embedded Steel Bar (by others) to accomodate drilling and tapping for specified security screws.
Mark, drill and tap for 5/16-18 UNC screws
Use size J tap drill (.277") - not provided.
Alternatively, if it is not possible to install embedded bar, 5/16-18 concrete anchors may be installed to allow for the installation of the security screws.
These are not provided as standard items but may be requested as an extra.

Air Duct
Specify OP20V by inside dimensions of said duct.
OP20V sleeve will be designed to slide inside duct with minimum of 1/16" (1.5mm) clearance.

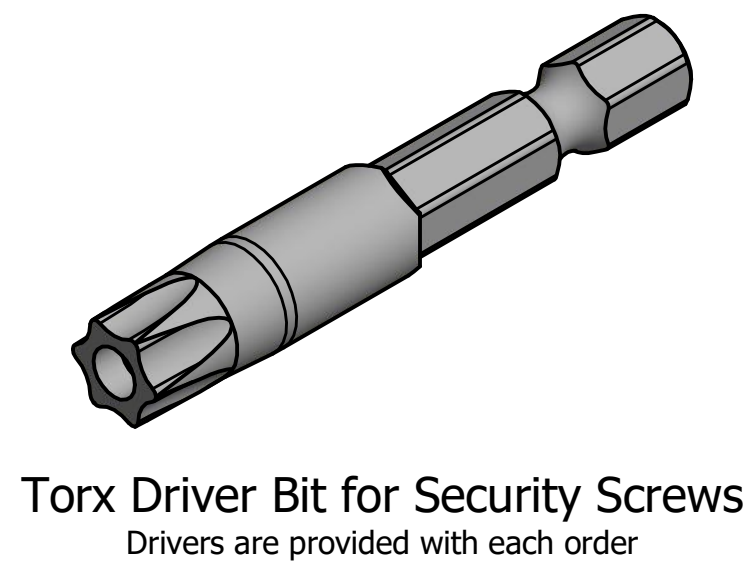

Torx Driver Bit for Security Screws
Drivers are provided with each order

DRAWN RS	TITLE Specification and Installation - Surface Mount	
DATE 2024-02-28		
Sheet Size B	DWG NO 300501001	REV -
<u>UNSPECIFIED LIMITS</u> 2 DIGITS: +/- .015 3 DIGITS: +/- .005 FRACTIONAL: +/- 1/32 ANGULAR: +/- 1/2°	 Stonegate Security Products Barrie, ON, Canada (705) 790-6330	
	MATERIAL	SHEET 1 OF 1
	SCALE 1 : 5	