



OPEN HERE FOR STEEL LOCKER SPECIFICATION GUIDE

LOCKERS · SHELVING · CABINETS · PORTABLE GATES


INDUSTRY'S LARGEST QUICK-SHIP PROGRAM





Specify SAFEMESH84[™] for the industry's safest high ventilation athletic lockers.

AMP ANGLE-FRAMED ALL-WELDED LOCKERS FEATURE SAFEMESH84, THE INDUSTRY'S STRONGEST AND SAFEST EXPANDED METAL





ART METAL PRODUCTS COMMON 1/2" 13 Gauge, Flattened, Expanded Metal 3/4" 13 Gauge, Flattened, Expanded Metal **RIGIDITY:** 84% more steel ensures a more rigid unit

Art Metal Products

STRENGTH: 84% more steel than 3/4" style

SAFETY: Smaller 1/2" diamond design keeps fingers out

SECURITY: Reduces risk of loss, theft and content damage



ALL AMP METAL, PLASTIC AND RECRUITER WOOD LOCKERS ARE GREENGUARD CHILDREN AND SCHOOLS CERTIFIED

Greenguard is an indoor air quality certification program for low emitting products and materials that evaluates over 75,000 chemicals, including volatile organic compounds, carcinogens and reproductive toxins. Referenced in both the Collaborative for High Performance Schools (CHPS) and the Leadership for

Energy and Environment Design (LEED) Building Rating System, Greenguard Children & Schools Certification establishes strict chemical emission standards for products intended for use in environments where children and others work, play or reside.

GALVANITE™ Corrosion Resistant Sheet Steel prevents rust and corrosion

IDEAL FOR USE IN HIGH HUMIDITY AREAS, OUTDOOR LOCATIONS, NEAR SHOWER, POOL AREAS AND FOOD INDUSTRY FACILITIES

GALVANITETM, is AMP's trade marked name for lockers and cabinets manufactured with galvanneal sheet steel components and finished with an electrostatically applied high-grade powder coat finish. Galvanite and powder coat offer exceptional double protection against corrosion, even under the most adverse conditions. Tests indicate that galvanneal increases the estimated lifecycle threefold. GALVANITE™ COLD ROLLED SHEET STEEL

with our powder coat finish after a 336 hour salt spray test.



WHAT IS GALVANNEAL?

Galvanneal is the result of the combined processes of galvanizing (hot-dipped zinc coating) and annealing (heat treatment). Galvanneal does not flake off its galvanized coating when formed, stamped, and bent. The very fine matte finish acts like a primer that easily adheres to paint. These characteristics make galvannealed sheet steel ideal for steel lockers in high humidity, corrosion prone areas. COMMON COLD ROLLED SHEET STEEL with a 1 mil dry film build paint thickness after a 336 hour salt spray test.







A TRADITIONAL DESIGN THAT HAS BEEN ENGINEERED FOR TODAY'S DEMANDING ENVIRONMENTS. Fully-framed all-welded lockers with innovative 1/2" 13 gauge flattened expanded metal sides and unique double frame front members provide rigidity, strength and durability designed to outlast the competition.



Fully-Framed • Flexible Design • Maximum Durability • High Security

WITH A MULTITUDE OF CONFIGURATIONS AND 3 LATCHING OPTIONS, OUR ANGLE-FRAME LOCKER CAN PROVIDE THE DURABILITY REQUIRED FOR A LIFETIME OF SERVICE.



Angle-Framed Wardrobe Locker Features

Art Metal Produci

BODY CONSTRUCTION: Angle-framed all-welded construction, front frame member is backed by a full-height 16 gauge steel channel, 13 gauge 1/2" flattened expanded metal sides, 16 gauge continuous top, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 18 gauge solid back

DOORS: 14 gauge diamond perforated doors are standard. Plain, louvered and Secure-Air-Flow door styles are available

HANDLE/LATCHING: 3 methods of latching available: traditional multi-point latching, maintenance-free single-point latching and high-security 3-point turn-handle latching

HINGES: 13 gauge 3-1/2" 7 knuckle hinges

SHELVES: 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves

HOOKS: 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher, no hooks for box lockers

WARRANTY: Lifetime

SIZES: See page 6 for standard wardrobe & box locker sizes



Angle-Framed lockers feature the industry's strongest and safest expanded metal.

- · 84% stronger than all competitors
- · Cannot put fingers thru mesh



Also Available with side hinged box doors





All-welded angle-framed construction for maximum unit strength, rigidity and durability



Traditional Multi-point lift-type latching Single-point latching



Heavy-Duty 13 gauge 3-1/2" 7-knuckle hinge welded to both the door and frame



WARDROBE DOOR LATCHING OPTIONS

Maintenance-Free High-security



13 gauge 1/2" flattened expanded metal is the strongest and safest in the industry



3-point turn-handle latching



Optional Integral Slope Top is fabricated of 16 gauge steel and is reinforced at each divider

INE CATALOG AND SPECI W.ARTMETALPRODUC CALL 800-252-5633 FOR OUF





Our complete line-up of open-front sport lockers is a collection of specialty lockers engineered for high school, collegiate and professional team organizations who demand high performance equipment storage solutions.

Art Metal Products

Our Pro-Sport Twin-Frame all-welded open-front athletic lockers are designed to accommodate the storage of a wide variety of athletic gear and apparel while allowing maximum ventilation.

Our base model Pro-Sport locker includes one upper hat shelf, stainless steel coat rod and two hooks. You can choose from three upper security compartments for personal storage: a small wallet security box, a 12" wide side hinged security box or the full width top hinged security compartment.

In the lower area, you can add a shelf/seat or opt for the foot locker/seat for a lockable equipment storage area.

Pro-Sport lockers feature Twin-Frame design which provides two front frame channels between sides of multiple column units and integral sides which are diamond perforated for ventilation. Pro-Sport lockers are engineered to last the lifetime of your facility.



Underside of foot locker seat is reinforced to support today's athlete.





Optional full-width top hinged security compartment provides ample storage space with easy access to contents.

ProSport lockers will ship in multiple column units up to 60" wide to meet individual job site conditions.

shelf/seat



Shown with optional fullwidth top hinged security

compartment, and lower

Shown with optional wallet security box

Base model includes upper hat shelf stainless steel coat rod and coat hooks

LOCKER SIZES	
Widths	12", 15", 18", 24", 30", 33", 36"
Depths	12", 16", 18", 22"
Nominal Column Heights	60", 72", 84

WWW.ARTMETALPRODUCTS.COM OR CALL 800-252-5633 FOR OUR FULL-LINE CATALOG AND SPECIFICATIO



AMP-1001 Turn-Handle Athletic Lockers

3-POINT TURN-HANDLE LATCHING AND ALL-WELDED CONSTRUCTION MAKE THIS LOCKER ONE OF THE MOST RUGGED AND SECURE.



AMP-1001 Features

BODY CONSTRUCTION: Twin-Frame all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back

DOORS: 14 gauge diamond perforated doors are standard. Plain, Secure-Air-Flow, and louvered door styles are available

HANDLE: 3-point turn-handle latching

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: 3-point turn-handle latching engaging at frame top, bottom and center side of door, 3/8" diameter lock rods are the heaviest in the industry, 3/16" turn-handle welded to 11 gauge cam, 11 gauge lock plate keeper is welded to center side of frame

HINGES: 16 gauge continuous piano hinge

SHELVES: 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves

HOOKS: 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher

WARRANTY: Lifetime

SIZES: See chart below for standard wardrobe locker sizes

HINGES: 16 gauge continuous piano hinge

tier openings 60" and 72" high, 16 gauge

HOOKS: 2-single hooks and 1-double hook

is standard. 1-double hook only for triple tier

and 1-double and 1-single hook for 9" wide

SIZES: See chart below for standard wardrobe

SHELVES: 16 gauge hat shelf for single

intermediate shelves

openings 30" and higher

WARRANTY: Lifetime


locker sizes

Upgrade to AMP-1001E Elite Series lockers which include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 12" wide AMP-1001E Elite Series lockers. Not available in 9" wide lockers.



AMP-1002 Champ Athletic Lockers

OUR TWIN-FRAME ALL-WELDED LOCKER WITH THE DEEP-DRAWN SEAMLESS STAINLESS STEEL **RECESSED HANDLE IS THE PERFECT CHOICE** FOR THE DEMANDING DESIGNER.



AMP-1002 Features

SPRING LOADED LATCHING: **BODY CONSTRUCTION:** Twin-Frame all-welded construction, 16 gauge 1-1/2" high continuous 3-point latching for openings 48" high bottom with reinforcing channels welded to the and higher underside at each side panel providing a rigid · 2-point latching for openings 20" high thru 36" high

unit base, 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back

DOORS: 14 gauge diamond perforated doors are standard. Plain, Secure-Air-Flow, Safety-View and louvered door styles are available

HANDLE: Deep-drawn seamless stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: 12 gauge latch hooks MIG welded to frame, gravity lift-type multi-point

Upgrade to AMP-1002E Elite Series lockers which include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded

to the hinge side as well as to the top and bottom door flanges lockers. providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide AMP-1002E

Flite Series

Column Heights 60", 72"

STANDARD WARDROBE SIZ	ANDARD WARDROBE SIZES FOR ALL TWIN-FRAME ALL-WELDED LOCKERS			
Single Tier	Double Tier	Triple Tier		
Widths 9", 12", 15", 18", 24"	Widths 9", 12", 15", 18", 24"	Widths 9", 12", 15", 18", 24"		
Depths 12", 16", 18", 22"	Depths 12", 16", 18", 22"	Depths 12", 16", 18", 22"		
Column Heights 36", 48", 60", 72"	Opening Heights 24", 30", 36"	Opening Heights 20", 24"		

Column Heights 48", 60", 72"

.... ISIT WWW.ARTMETALPRODUCTS.COM OR CALL 800-252-5633 FOR OUR FULL-LINE CATALOG AND SPECIFICATIONS



AMP-1003 Champ Corridor Lockers

LOUVERED DOORS, SOLID SIDES AND DEEP-DRAWN SEAMLESS STAINLESS STEEL RECESSED HANDLE MAKE

AMP-1003 LOCKERS THE CLASSIC CHOICE FOR WELDED CORRIDOR LOCKERS.



AMP-1003 Features

BODY CONSTRUCTION: Twin-Frame all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge solid sides are integral with front vertical frame, 18 gauge solid back

DOORS: 14 gauge louvered doors are standard. Plain, Secure-Air-Flow, Safety-View and diamond perforated door styles are available

HANDLE: Deep-drawn seamless stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: 12 gauge latch hooks MIG welded to frame, gravity lift-type multi-point spring

LOADED LATCHING:

• 3-point latching for openings 48" high and higher

• 2-point latching for openings 20" high thru 36" high

HINGES: 16 gauge continuous piano hinge

SHELVES: 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves

HOOKS: 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher

WARRANTY: Lifetime

SIZES: See page 6 for standard wardrobe locker sizes

LATCHING: Single-point maintenance-free quiet

latching system, 11 gauge MIG welded latch

HINGES: 16 gauge continuous piano hinge

tier openings 60" and 72" high, 16 gauge

HOOKS: 2-single hooks and 1-double hook is

standard. 1-double hook only for triple tier

and 1-double and 1-single hook for 9" wide

SIZES: See page 6 for standard wardrobe

SHELVES: 16 gauge hat shelf for single

with pry resistant lug

intermediate shelves

openings 30" and higher

WARRANTY: Lifetime

locker sizes

Upgrade to AMP-1003E Elite Series lockers which include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door.




A 1-1/2" wide stiffener will be furnished for 9" wide AMP-1003E Elite Series lockers.

AMP-1004 Bulldog Athletic Lockers

THIS PREMIUM ATHLETIC LOCKER WITH SINGLE-POINT LATCHING MECHANISM HAS NO MOVING PARTS PROVIDING A QUIET AND MAINTENANCE-FREE OPERATION.

Twin-Frame design, deep-drawn seamless stainless steel recessed handle, continuous piano hinge and torque-free reinforced heavy-gauge door are standard.

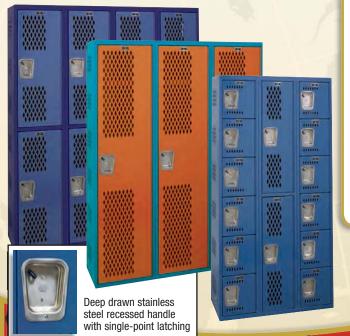

V

AMP-1004 Features

BODY CONSTRUCTION: Twin-Frame all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back

DOORS: 14 gauge diamond perforated doors and full-height door stiffener are standard. Plain, Secure-Air-Flow and louvered door styles are available

HANDLE: Deep-drawn seamless stainless steel recessed handle is standard.

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

Bulldog lockers include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torquefree door.

A 1-1/2" wide stiffener will be furnished for 9" wide AMP-1004 Bulldog lockers.





AMP-1005 Bulldog Corridor Lockers

OUR SINGLE-POINT ALL-WELDED CORRIDOR LOCKERS HAVE ACHIEVED A STANDARD OF EXCELLENCE THAT ONLY ART METAL PRODUCTS CAN PROVIDE.



AMP-1005 Features

BODY CONSTRUCTION: Twin-Frame all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge solid sides are integral with front vertical frame, 18 gauge solid back

DOORS: 14 gauge plain doors and a full-height door stiffener are standard.

Secure-Air-Flow, diamond perforated and louvered door styles are available

HANDLE: Deep-drawn seamless stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

Bulldog lockers include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide AMP-1005 Bulldog lockers.

LATCHING: Single-point maintenance-free quiet latching system, 11 gauge MIG welded latch with pry resistant lug

HINGES: 16 gauge continuous piano hinge

SHELVES: 16 gauge hat shelf for single tier openings 60" and 72" high, 16 gauge intermediate shelves

HOOKS: 2-single hooks and 1-double hook is standard. 1-double hook only for triple tier and 1-double and 1-single hook for 9" wide openings 30" and higher

WARRANTY: Lifetime

SIZES: See page 6 for standard wardrobe locker sizes



TA-50 Equipment Storage Lockers



TA-50 Equipment Storage Locker

BODY CONSTRUCTION: Twin-Frame all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base, 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back. Optional solid sides are available

DOORS: 14 gauge diamond perforated doors with a full height door stiffener are standard. Secure-Air-Flow, diamond perforated and louvered door styles are available

HANDLE: 3-point turn-handle

DOOR STRIKE: Continuous vertical door strike at both hinge sides

LATCHING: 3/16" turn-handle welded to 11 gauge cam engaging frame at top, bottom and center side of door. 3/8" diameter lock rods

HINGES: 16 gauge continuous piano hinge

SHELVES: 16 gauge hat shelf located 12" down from top, 16 gauge lower shelf located 18" up from bottom

COAT ROD: Stainless steel full-width coat rod located under hat shelf

WARRANTY: Lifetime

SIZES: See chart for standard sizes

Equipment Storage Locker Sizes

Single Tie		
Widths	24", 30", 36", 42", 48"	Equipment Storage lockers willship in multiple
Depths	12", 16", 18", 22"	column units up to 60" wide to meet individual
Heights	60", 72", 84"	job site conditions.

WWW.ARTMETALPRODUCTS.COM OR CALL 800-252-5633 FOR OUR FULL-LINE CATALOG AND SPECIFICATIONS




AMP-1006 Athletic Box Lockers

ART METAL PRODUCTS ALL-WELDED BOX LOCKERS ARE PERFECT STORAGE SOLUTIONS WHEN SPACE IS AT A PREMIUM.

Incorporating our Twin-Frame design with easy to open singlepoint thru-the-door friction catch/door pull padlock hasps and diamond perforated doors and sides, our welded box lockers will stand the test of time.

Our all-welded box lockers are excellent in combination with any of our AMP-1002, AMP-1003, AMP-1004 and AMP-1005 wardrobe lockers providing ratios to meet all of your P.E. locker requirements.

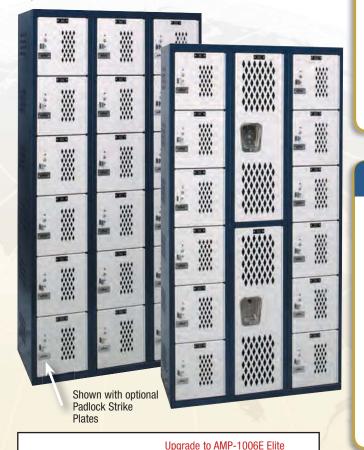



Series lockers which include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 12" wide AMP-1006E Elite Series all-welded box lockers.



Optional Padlock Strike Plates for box doors protect finish from being marred by padlock



Standard single-point thru-the-door finger pull padlock hasp for all box lockers

AMP-1006 Features

Metal Product

BODY CONSTRUCTION: Twin-Frame all-welded construction, 16 gauge 1-1/2" high continuous bottom with reinforcing channels welded to the underside at each side panel providing a rigid unit base. 16 gauge continuous top, 16 gauge diamond perforated sides are integral with front vertical frame, 18 gauge solid back

DOORS: 14 gauge diamond perforated doors are standard. Louvered, Secure-Air-Flow and plain door styles are available.

HANDLE/LATCHING: Single-point thru-the-door projecting finger pull handle with padloc hasp. Optional deep-drawn seamless stainless steel recessed handle is available HINGES: 16 gauge continuous piano hinge

HOOKS: None

SHELVES: 16 gauge intermediate shelves


WARRANTY: Lifetime

SIZES: See chart below for standard box locker sizes

NOTE: 8" and 9" high box doors will be top hinged with a concealed 3/8" diameter continuous hinge rod

AMP Combination P.E. Lockers

The design flexibility of our all-welded athletic lockers allows us to mix and match wardrobe lockers with box lockers to meet any configuration and/or ratio your facility may demand. Please contact our Sales Manager at 1-800-252-5633. We will help you to create an environment that will be both esthetically pleasing and functional.

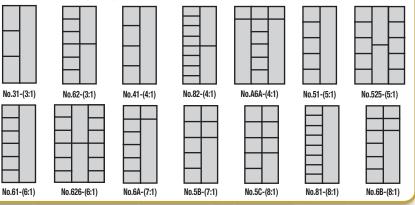

Widths for all-welded box locker openings12", 15", 18"Depths for all-welded box locker openings12", 16", 18", 22"

		TIER	OPENING HEIGHTS	COLUMN HEIGHTS
		Four Tier	8", 9", 12", 15", 18"	32", 36", 48", 60", 72"
R		Five Tier	12", 14.4"	60", 72"
	-	Six Tier	8", 10", 12"	48", 60", 72"
		Seven Tier	10.3"	72"
R		Eight Tier	8", 9"	64", 72"
		Nine Tier	8"	72"

Notes: All welded lockers will ship in multiple column units up to 60" wide to meet individual job site conditions

4

TIEI

TO 9 TIEF



Emergency Response Unibody All-Welded Performance Lockers



SEURITY

UTILITY BELT HOOK LOCKING SECURITY

- ONE SIDE POCKET. to accommodate a
- **FULL HEIGHT PIANO**
- FULL HEIGHT DOOR STIFFENER
- **OPTIONAL LOWER STORAGE** AREA with pull-out drawer doubles as a seat with top (Auto Locking)

Available with and without base storage compartment and seat



Features

BODY CONSTRUCTION: Unibody all-welded, 16 gauge solid sides, galvanneal corrosion resistant sheet steel. Back is 18 gauge

BODY STYLES: Single tier, designed for specialized use

FEATURES: Security box (9" x 12") with keyed lock

DOOR: 14 gauge louvered double doors with full-height welded-in stiffener. Security box door is not vented.

HINGES: 16 gauge continuous piano type

Art Metal Product

HANDLE: 3-point high-security turn handle latching handle

HOOKS: Two single wall hooks in wardrobe area plus single hook in opening below security box

COAT RODS: One at vertical wardrobe section

SHELVES: 16 gauge, two full-width at top, one partial shelf

WARRANTY: Lifetime

Standard	Upper Unit Sizes	2	
WIDTHS	24", 30", 36", 48"		Γ
DEPTHS	18", 24"		Γ
HEIGHTS	72″		

Standard	Lower Base Sizes
WIDTHS	24", 30", 36"
DEPTHS	30", 36"
HEIGHTS	18″

Unibody All-Welded SCHOOL CUBBIE LOCKERS



Features

BODY CONSTRUCTION: Unibody all-welded 16 gauge steel construction, backs are 18 gauge, bottom is galvanneal sheet steel for maximum corrosion resistance, hemmed and beaded dividers are safe to the touch

BODY STYLES: Open design, 4 body styles

SHELVES: 16 gauge welded to body for added rigidity with a beaded leading edge for added safety

NOTES: Easily secures to wall and floor for added safety, low installation costs, reduced installation time, low maintenance, low life-cycle cost, lifetime warranty, insect and termite proof. All welded cubbies will ship in multiple column units up to 60" wide to meet individual jobsite conditions.

WARRANTY: Lifetime

MODEL SIZES	WIDTH	DEPTH	HEIGHT
PRIMARY CUBBIE	12", 15"	12", 16"	48″
PRIMARY II CUBBIE	12", 15"	12", 16"	48″
PRIMARY JR. CUBBIE	12", 15"	12", 16"	24″
BACKPACK CUBBIE	15", 18"	12", 16"	48″

PRIMARY II CURRIE CUBBIE

PRIMARY

BACKPACK CUBBIE PRIMARY JR. CUBBIE

WWW.ARTMETALPRODUC COM OR CALL 800-252-5633 FOR LINE CATALOG AND SPEC OUR F



8 PERSON UNIFORM

3

Exchange Locker

Model HUE214-8P (32-9/16"w X 21"d X 84"h)



ð

9 PERSON UNIFORM

Exchange Locker Model HUE454-9P (24"w X 15"d X 84"h)

FULL HEIGHT

Hanging Uniform Locker Model HUE214-1

(32-9/16"w X 21"d X 84"h)

AMP Art Metal Products


HALF HEIGHT

Hanging Uniform Locker Model HUE214-2 (32-9/16"w X 21"d X 84"h)

SOILED UNIFORM

Exchange Locker Model HUE614-1 (26"w X 21"d X 84"h)

2





HEAVY-DUTY PADLOCK Handles (Locks not included)



USER DOORS Re-Inforced at latches

Features

BODY CONSTRUCTION: 24 gauge, backs perforated for ventilation, galvannealed bottoms

BODY STYLES: Full and half height hanging uniform lockers, 9 person folded uniform exchange lockers, 8 person hanging uniform exchange locker, soiled uniform locker

DOOR: User doors are 20 gauge (louvered at 8 and 9 Person)

HINGES: 5 knuckle (master door)


FRAME: Master door frame is 16 gauge

LATCHING: Master Door: Multi-point with industry standard key lock User Doors: Single-point turn latch for padlocks (locks not included)

COAT RODS: Standard for full and half height hanging uniform lockers and 8-Person exchange lockers

NOTES: All uniform exchange lockers ship fully-assembled

WARRANTY: One year







STANDARD KD Wardrobe Lockers Axoption





Deep drawn stainless steel recessed handle with gravity lift-type latching

Standard KD Wardrobe Locker Features Doors 20" High and Higher

BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid body components

DOORS: 16 gauge louvered doors, 18 gauge for 9" wide, are standard. Plain, Secure-Air-Flow, Safety-View and diamond perforated door styles are available

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

HANDLE: Deep-drawn seamless stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: 12 gauge latch hooks MIG welded to frame. Gravity lift-type multi-point

spring loaded latching:

• 3-point latching for openings 48" high and higher

• 2-point latching for openings 20" high thru 36" high

HINGES: 16 gauge continuous piano hinge

HOOKS: 2-single hooks and 1-double hook is standard. 1- double hook only for triple tier and 1-double and 1 - single hook for 9" wide openings 30" and higher

SHELVES: Hat shelf for single tier openings 60" and 72" high

NOTES: All production KD lockers are supplied without legs unless otherwise specified

WARRANTY: 2 years

SIZES: See chart below for sizes

STANDARD WARDROBE SIZES FOR KNOCK DOWN LOCKERS

TIER	WIDTH	DEPTH	OPENING HEIGHT	FRAME HEIGHT
SINGLE TIER	9" 12" 15" 18" 24"	12" 15" 18" 21" 24"	36" 48" 60" 72"	36″ 48″ 60″ 72″
DOUBLE TIER	9″ 12″ 15″ 18″	12" 15" 18" 21" 24"	30″ 36″	60″ 72″
TRIPLE TIER	9″ 12″ 15″	12" 15" 18"	20" 24"	60" 72"

STANDARD KD Box Lockers



Standard KD Wardrobe Locker Features doors 18" high and under

BODY CONSTRUCTION: Knock down (KD) with 24 HINGES: 16 gauge continuous piano hinge gauge solid body components

HOOKS: None

DOORS: 18 gauge louvered doors are standard. Plain, Secure-Air-Flow, Safety-View Plus and diamond perforated door styles are available

FRAME: 16 gauge frame

HANDLE: Projecting finger pull

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: Single-point thru-the-door finger pull padlock hasp

NOTES: All production KD lockers are supplied without legs unless otherwise specified. Safety-View Plus polycarbonate doors are available for 12" wide x 12" high five and six tier box doors only

WARRANTY: 2 years

SIZES: See chart for sizes

STANDARD KD BOX LOCKER SIZES OPENING HEIGHT TIER WIDTH DEPTH FRAME HEIGHT FOUR TIER 12" 15" 12" 15" 18" 15" 18" 60" 72" **FIVE TIER** 12" 15" 12" 15" 18" 12" 14.4' 60" 72" SIX TIER 12" 12" 15" 12" 15" 18" 72"

.... WWW.ARTMETALPRODUCTS.COM OR CALL 800-252-5633 FOR OUR FU -LINE CATALOG AND SPECIFICATIONS





HEAVY-DUTY CORRIDOR (HDC) Lockers

HEAVY-DUTY CORRIDOR LOCKERS ARE DESIGNED TO INCLUDE ALL THE GREAT FEATURES OF OUR STANDARD KD WARDROBE LOCKERS EXCEPT THAT THE DOOR GAUGE IS INCREASED TO 14 GAUGE WHICH IS 25% HEAVIER THAN STANDARD 16 GAUGE DOORS.







Upgrade to Elite Series HDC Corridor lockers which include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide Elite doors.

Features

BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid body components

DOORS: 14 gauge louvered doors are standard. Plain, Secure-Air-Flow, Safety-View and diamond perforated door styles are available

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

HANDLE: Deep-drawn seamless stainless steel recessed handle

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: 12 gauge latch hooks MIG welded to frame. Gravity lift-type multipoint spring loaded latching:

• 3-point latching for openings 48" high and higher

· 2-point latching for openings 20" high thru 36" high

HINGES: 16 gauge continuous piano hinge

HOOKS: 2-single hooks and 1-double hook is standard. 1- double hook only for triple tier and 1-double and 1 - single hook for 9" wide openings 30" and higher

SHELVES: Hat shelf for single tier openings 60" and 72" high

NOTES: All production KD lockers are supplied without legs unless otherwise specified

WARRANTY: 2 years

SIZES: See wardrobe locker chart on page 12 for sizes

Deep drawn stainless steel recessed handle with gravity lift-type latching



IAGNUM STUDENT KD Lockers

THE MAGNUM STUDENT K.D. SINGLE-POINT (NO MOVING PARTS LATCHING MECHANISM) CORRIDOR LOCKER IS BY FAR OUR QUIETEST K.D. LOCKER.

UPGRADES all body components to 16 gauge with 18 gauge back. Recommended when placing heavy items in lockers such as backpacks available steel recessed handle Magnum Student Lockers include a 3" wide 18 gauge full height door stiffener spot welded to the inner door face and MIG welded to the hinge side as well as to the top and bottom door flanges providing a rigid torque-free door. A 1-1/2" wide stiffener will be furnished for 9" wide Magnum doors.

Features

BODY CONSTRUCTION: Knock down (KD) with 24 gauge solid body components,

DOORS: 14 gauge plain doors with 18 gauge full-height door stiffener are standard. Louvered, Secure-Air-Flow and diamond perforated door styles are

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

HANDLE: Deep-drawn seamless stainless

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING: Single-point maintenance-free

quiet, 11 gauge latch hooks MIG welded to frame with pry resistant lug

HINGES: 16 gauge continuous piano hinge

HOOKS: 2-single hooks and 1-double hook is standard. 1- double hook only for triple tier and 1-double and 1 - single hook for 9" wide openings 30" and higher

SHELVES: Hat shelf for single tier openings 60" and 72" high

NOTES: All production KD lockers are supplied without legs unless otherwise specified.

WARRANTY: 2 years

SIZES: See wardrobe locker chart on page 12 for sizes

Deep drawn stainless steel recessed handle with single point latching



ISIT WWW.ARTMETALPRODUCTS.COM OR CALL 800-252-5633 FOR OUR FUI -LINE CATALOG AND SPECIFICATIONS



IEAVY-DUTY VENTILATED (HDV) Lockers



UPGRADE TO OUR ELITE

SERIES HDV LOCKERS which include a full height door stiffener welded to the inner door face.

UPGRADE TO OUR MAGNUM **STUDENT HDV LOCKERS**

which include our single-point latching and a full height door stiffener welded to the door inner face.



4MP

STANDARD deep drawn stainless steel recessed handle with gravity lift-type latching for HDV wardrobe doors 20" high and higher

STANDARD

single-point thruthe-door finger pull padlock hasp for box doors. Shown with optional Padlock Strike Plates

Features

BODY CONSTRUCTION (WARDROBE & BOX

LOCKERS): Knock down (KD) with 16 gauge solid top, bottom and intermediate shelves, 16 gauge diamond perforated sides, 18 gauge solid back

DOORS: 14 gauge diamond perforated doors are standard. Louvered, Secure-Air-Flow and Safety-View door styles are available

FRAME: 16 gauge frame with 16 gauge horizontal cross member between doors on double and triple tier wardrobe lockers

HINGES: 16 gauge continuous piano hinge

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

WARDROBE LOCKERS (DOORS 20" AND HIGHER):

HANDLE: Deep-drawn seamless stainless steel recessed handle

LATCHING: Gravity lift-type multi-point spring loaded latching:

· 3-point latching for openings 48" high and higher,

· 2 point latching for openings 20" high thru 36" high

HOOKS: 2-single hooks and 1-double hook is standard.

• 1- double hook only for triple tier and 1-double

• 1 - single hook for 9" wide openings 30" and higher

SHELVES: 16 gauge hat for single tier openings 60" and 72" high

BOX LOCKERS: (DOORS 18" HIGH AND UNDER)

HANDLE: Single-point thru-the-door finger pull padlock hasp

HOOKS: None

NOTES: All production KD lockers are supplied without legs unless otherwise specified

WARRANTY: 2 years

SIZES: See locker charts on page 12 for sizes

DOOR VENTILATION Options

PLEASE REFER TO INDIVIDUAL PRODUCT PAGES FOR APPLICABLE OPTIONS.



Plain Doors (Quiet)



Secure-Air-Flow Doors (Security Ventilation)



Louvered Doors (Standard)



Safety-View Doors



Louvered Doors (With Door Stiffener)



Safety-View Plus Box Doors (See-thru Polycarbonate Door) 12"wide x 12" high KD Box doors only



Diamond Perforated Doors (High Ventilation)



Hybrid Red Oak Plain Door



DiamondPerforated Doors (With Door Stiffener)



Hybrid Red Oak Panel Door

(See-thru Polycarbonate Insert)



All lockers ship fully-assembled

- Fabricated from furniture grade red oak
- Strong, durable and long-lasting
- Excellent moisture resistance
- Shoulder pad storage
- 3-coat lacquer finish

- Upper security box door includes built-in combination lock
- Optional team engraved logo on security box door
- Lower foot locker/seat allows for storage of bulk items
- Chrome plated coat rod

Features

BODY CONSTRUCTION: Wood lockers shall be fabricated from 3/4" plain sliced red oak plywood throughout including sides, backs and hat shelves.

BODY STYLES: Open-front with upper security box and footlocker

STOCK SIZES: 24" wide x 24" deep x 84" high 30" wide x 24" deep x 84" high

FINISH: All locker parts to be finished with a three coat catalyzed clear cabinet lacquer

TRIM: Face trim, shelf valances, seat front nosing, seat hinge support blocking and seat side support cleats are made from red oak lumber

SECURITY BOX DOOR: Made from red oak lumber

HINGES: Continuous in bright brass plating

HOOKS: Two double prong metal hooks

CLOTHES ROD: Made from KV 1-1/16" diameter chrome plated steel, 075" wall thickness

UPPER SHELF: Covered with Wilson-Art 7888-60 Golden Oak plastic laminate for durability

APPEARANCE: Color: Natural red oak

WARRANTY: 1 year



Art Metal Product

configurations are also available. Please consult factory for details.

The beauty is in the details...



WWW.ARTMETALPRODUCTS.COM OR CALL 800-252-5633 FOR OUR FULL-LINE CATALOG AND SPECIFICATIONS



Club © Lockers



Shown with optional finished end panels, base and crown molding



Optional wood species and door styles are available. Doors can be prepared for key locks, electronic locks, and padlocks. Please consult factory for details.

Features

BODY CONSTRUCTION: Wood lockers shall be fabricated from ¾" plain sliced red oak plywood throughout including sides, backs and hat shelves.

BODY STYLES: Single, double and triple tier

FINISH: All interior/front faces to be finished with a three coat catalyzed clear cabinet lacquer or equivalent.

DOOR: Furniture grade red oak plywood, finished with 3 coats of lacquer

LATCHING: Cylinder key locks are standard

HINGES: Concealed european-style cabinet hinges

HOOKS: Two single hooks per single and double tier opening. One double prong ceiling hook for triple tier.

COAT RODS: Standard for single and double tier

SHELVES: Hat shelf is included in single tier lockers.

LEGS: No legs

APPEARANCE: Natural red oak



Available optional decorative crown molding and base in red oak finish



Key locks are standard



Concealed european style cabinet door hinges

AQUAMAX HDPE Solid Plastic Lockers

IDEAL FOR USE IN WET ENVIRONMENTS SUCH AS SHOWER AREAS, POOL AREAS AND OUTDOORS.



Sandstone	Deep Blue
Taupe	Forest
Sand Speckle	Slate
Garnet	Slate Speckle

Standard Sizes			
WIDTH	12″	15″	18″
DEPTH	12″	15″	18″
HEIGHT	60″	72″	

Available in single, double, triple, four, five, six and "Z" tier configurations..

Features **BODY CONSTRUCTION:** High density (HDPE) Polyethylene plastic, 3/8" thick body panels **DOORS:** 1/2" thick solid HDPE plain doors with perimeter ventilation HANDLE (WARDROBE): Projecting solid plastic lift handle HANDLE (BOX): Box doors 18" and under include a single-point projecting padlock hasp with door pull LATCHING: Full-height lift-type latching for single, double and triple tier wardrobe lockers HINGES: Continuous aluminum hinge is powder coated HOOKS: Two stainless steel single prong hooks in single and double tier SHELVES: Upper hat shelf and lower shelf included in single tier lockers 60" and 72" high NOTES: All doors prepared for use with padlock (locks not included). Production locker body components are available in white only.

Art Metal Products

WARRANTY: 20 years

SIZES: See chart

Features

304 Stainless Steel Lockers

PERFECT FOR AREAS PRONE TO RUST AND SANITATION CONCERNS AND ARE IDEAL FOR FOOD INDUSTRY, POOL AREA AND OUTDOOR APPLICATIONS.



BODY CONSTRUCTION: Knock down (KD) with 24 gauge 304 stainless steel body components

DOORS: 16 gauge 304 stainless steel louvered doors are standard.

FRAME: 16 gauge 304 stainless steel frame with 16 gauge horizontal cross member between doors on double tier wardrobe lockers

HANDLE (WARDROBE): Deep-drawn seamless 304 stainless steel recessed handle

HANDLE (BOX): Projecting finger-pull handle is standard

DOOR STRIKE: Continuous vertical door strike at both hinge and latch side

LATCHING (WARDROBE): 12 gauge latch hooks MIG welded to frame. Gravity lifttype multi-point spring loaded latching:

• 3-point latching for openings 48" high and higher

• 2-point latching for openings 20" high thru 36" high

LATCHING (BOX): Single-point thru-the-door finger pull padlock hasp

HINGES: 2" long 16 gauge 5-knuckle stainless steel hinges. 3 hinges for doors 48" and higher and 2 for doors under 48" high.

HOOKS: 2-single hooks and 1-double hook is standard. 1- double hook only for triple tier and 1-double and 1 - single hook for 9" wide openings 30" and higher. No hooks in openings less than 20" high.

SHELVES: Hat shelf for single tier openings 60" and 72" high

NOTES: All production KD lockers are supplied without legs unless otherwise specified

WARRANTY: 2 years

SIZES: See wardrobe and box locker charts on page 12 for sizes

VISIT WWW.ARTMETALPRODUCTS.COM OR CALL 800-252-5633 FOR OUR FULL-LINE CATALOG AND SPECIFICATIONS





SAFE-O-MAT" BUILT-IN

COIN, TOKEN &

Available in coin

return and coin

collect as well as

token collect and

card access styles

CARD LOCKS

ZEPHYR[®] BUILT-IN COMBINATION LOCKS Available in

spring-bolt and dead-bolt styles,

are key controlled and include multiple combination settings



COMBINATION PADLOCKS Available standard and master-keyed, padlocks can be used on all locker types

ZEPHYR® **BUILT-IN KEY LOCKS** Available in spring-bolt and dead-bolt styles and available standard or master-

keyed

ZEPHYR[®] 1730 ADA compliant for use on gravity lift-type latches

HALLOWELL


Digital locks

DIGITAL

LOCKS

using a







Now you can select from 24 DESIGNER POWDER COAT FINISHES and choose Two-Tone Color combinations for your production lockers at no additional cost.

CHOOSE DOORS OF ONE COLOR AND FRAME OF A SECOND COLOR TO ADD MORE VISUAL IMPACT TO ANY PROJECT DESIGN.

All surfaces shall be thoroughly cleaned with a seven stage hot-spray washing process and coated with an insoluble iron phosphate film.

A high grade custom blended powder is applied by a computer controlled, highly efficient electrostatic paint system. The product is cured for 20 minutes at 350 degrees through a continuous baking oven to provide maximum paint adhesion, tough durability and a high grade paint finish.

All body components of production KD lockers will be painted our standard neutral color, currently Parchment (choice of Parchment or Hallowell Gray for HDV body components only).



800-252-5633 (954) 429-9662 Fax (954) 428-3843

401 Jim Moran Blvd., P.O. Box 4157, Deerfield Beach, FL 33442 www. ArtMetalProducts.com



Art Metal Products reserves the right to modify its designs and/or make changes in specifications or colors without prior notice. In the interest of safety, all AMP lockers, cubbies and shelving must be securely anchored to the floor and/or wall.

METAL LOCKER COLOR SELECTION

Colors shown are an approximate representation of the actual color. Please do not make your final color selection from printed media or internet images, as they may not be 100% accurate.

**

*

*

*

**

**

**

**

For a more accurate color selection call

800-252-5633

to request a full set of our master color samples.

www.ArtMetalProducts.com

.

DISCUSSION OF