


USS MINISUB™ | LUBRICATOR VALVE

- 15K In-Riser or Open-Water Option Available
- API 17G 2nd Edition
- Metal to Metal Seal
- Cut & Seal on Slick-line and E-line (Qualification Required)
- Equalization Safety Feature
- 550 ft-lb. Bending Moment (OWLV)
- Dual Valve Option Available
- ROV Override Panel (OWLV)

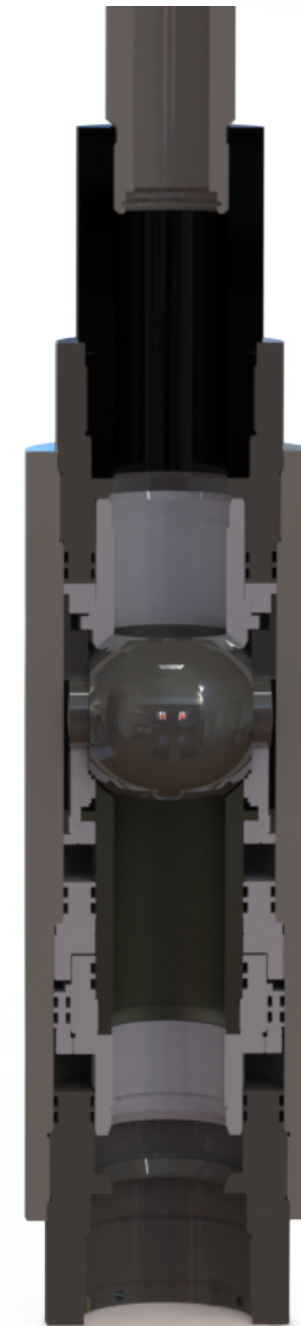

CONFIDENTIAL

UNITEDSUBSEA.COM



UNITED SUBSEA
SPECIALIST