


# LED Emergency Light #EML-12



Intertek

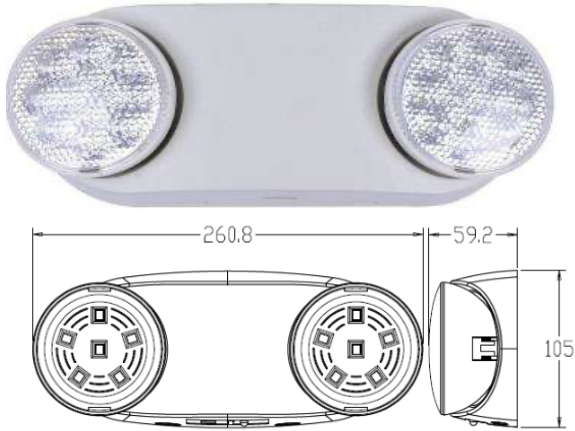

## SPECIFICATION INFORMATION

Description	LED Emergency Light consisting of injection-molded thermoplastic ABS housing with UL-94V-0 flame rating, fire-resistant
Charging Time	24 hours (output:2w 3.6v Nickel Cadmium Battery)
Discharge Time	90 minutes
Size	260.8mm x 105mm x 59.2mm
Ingress Protection	<b>IP65</b>
Installation	Surface
Finishes available (colors)	White
Power consumption	2W maximum
Input Voltage	120 -277VAC, 50/60HZ
Warranty	5 years
Certifications	UL, ETL, CE, FCC

## ORDERING INFO

**PART #**

EML-12