
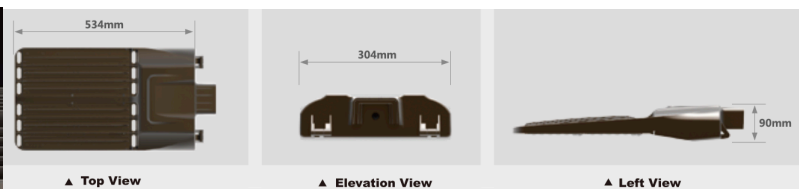
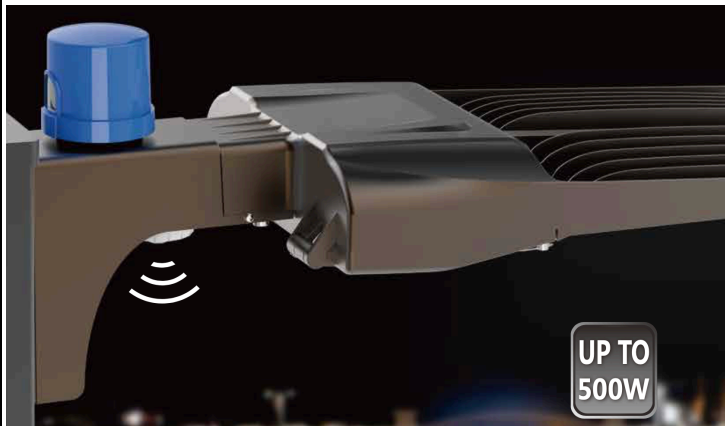


LED Roadway / Area # HL-PL

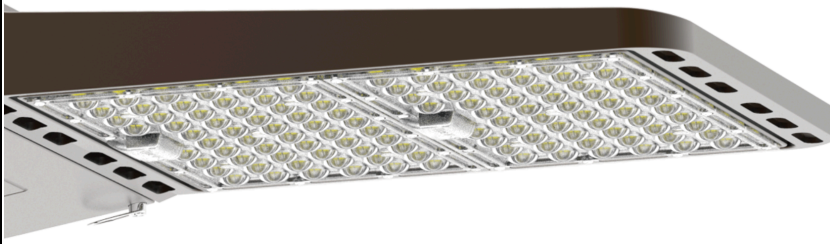

SPECIFICATION INFORMATION

LED Brand	Lumileds
Driver Brand	Meanwell
Dimming	1-10V, DMX, DALI (optional)
Beam Angles Available	Type 2-Medium, Type 3-Short, Type 3-Medium, Type 4, Type 5, 90 x120 , 30 , 45 , 60
Ingress Protection	IP66
Installation	Surface
Finishes available (colors)	Gray
Power consumption	60w, 80w, 100w, 150w, 185w, 240w, 300w, 400w, and 500w
Input Voltage	100 -277VAC, 50/60HZ
Color Temperatures Available	3000K, 4000K, 4500K, 5000K, 5700K, 6500K
Luminous efficiency	≥100LM/W
CRI	80+
Warranty	5 years
Certifications	DLC 4.3, UL, CUL, CE, DLC, SAA

ORDERING INFO

BASE PART #	COLOR TEMPERATURE	DISTRIBUTION TYPE	WATTAGE
HL-PL-	3000K, 4000K, 4500K, 5000K, 5700K, 6500K	Type 2-M, Type 3-S, Type 3-M, Type 4, Type 5, 90 x120 , 30 , 45 , 60	60w, 80w, 100w, 150w, 185w, 240w, 300w, 400w, 500w

EXAMPLE OF COMPLETE PART #: HL-PL-4000K-TYPE2M-100W-

OPTIONS

SC = Bi-Level Sensor Control (occupancy sensor)

PH = Photocontrol

SS = Surge Suppressor (10KV)