

Southern Blocking LLC
112 S 12th Ave
Lanett, Alabama 36863

Zee-Klip.com Submittal

Loose Clip for attachment of Wood Backing
visit our web site: www.Zee-Klip.com

DESCRIPTION

Zee-Klips™ are designed to add structural stability to " In-Wall " wood backing by placing the square edge of the backing into the inside corner of the Klip. This allows fasteners to be installed from the face of the backing thru the un-punched flange of the Zee-Klip™. The result allows the number of fasteners when combined to create a cumulative value for shear and withdrawal. This cumulative value is based on ultimate values of the fastener divided by a safety factor. The resulting number will yield a design value for the wood backing at the location where the Zee-Klip™ and backing intersect.

Zee-Klips™ are utilized as pre-install for cementitious fire proofing

Zee-Klips™ are utilized for column and beam wraps for drywall

ADVANTAGES

- Saves labor
- Each clip is 5" long
- Punched holes act as a guide for fastener
- Punches also promote proper fastener placement
- 50 Zee-Klips™ to a pack
- 50 pack fits in pouch
- Allows for double and triple layer backing
- Top Track Clip for Fire-Proofing
- Drywall Column & Beam Wraps

SPECIFICATIONS



Stamped from a base metal thickness of .030 and minimum of G40 coating

LIMITATIONS -

- Shear values based on fastener (fastener manufacturer)
- Shear and Pullout values based on maximum 20 ga. metal
- Bottom track should be properly fastened to the slab on grade or elevated deck
- Each Jobsite and Conditions offer up limitations that are not listed above

ZEE-KLIP™

Pat No. 11,408,169

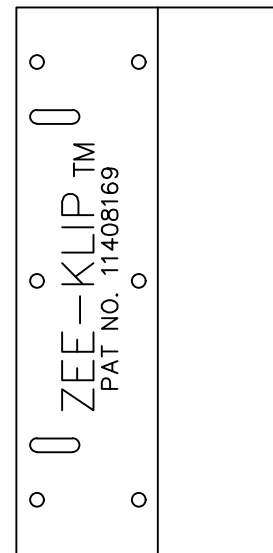

Job Name: _____

Contractor: _____

Date: _____

Stamp:

Approved By: _____